



LUCE PRODUCT Vol.3

www.southeastthailand.co.th

INTERIOR LIGHTING

www.southeastthailand.co.th

update:16/03/2022



SOUTHEAST THAILAND THAILAND SOUTHEAST

TEL : (662) 258-0210-5

FAX : (662) 258-1919

EMAIL : INFO@SOUTHEASTTHAILAND.CO.TH

About 01

Visit Out Show Room & Our Team



SOUTHEAST THAILAND CO., LTD.

บริษัท เซาท์อีสต์ไทยแลนด์ จำกัด ผู้นำรายโคมไฟหลากหลายชนิดทั้งโคมไฟใช้งานทั่วไปสำหรับตกแต่งภายในอาคาร รวมทั้งโคมไฟภายนอกอาคารในรูปแบบของโคมไฟที่ทันสมัย มีเอกลักษณ์ เหมาะสมกับการใช้งาน รวมถึงโคมไฟ led เช่น ดาวน้โคมไฟติดผนังโคมไฟติดเพดานรวมถึงโคมไฟประเภทอื่นอีกมากมาย ในทุกรูปแบบ ทุกสไตล์ ไม่ว่าจะเป็นแนวโมเดิร์นหรือแนววินเทจใช้ได้ทั้งภายในและภายนอกอาคาร ด้วยมาตรฐานการผลิตที่ทันสมัย รวมถึงคุณภาพของ led chip ที่ทางบริษัทฯ ได้เลือกใช้ผลิตภัณฑ์ที่เป็นแบรนด์ชั้นนำระดับโลก เช่น Lumileds Cree Bridgelux ซึ่งมั่นใจในมาตรฐานและคุณภาพระดับสากล ผลิตภัณฑ์โคมไฟที่ทางบริษัทฯ เป็นตัวแทนจำหน่ายมีทั้งนำเข้าจากยุโรป อาทิ Klewe, Vistosi, Prisma-Fumagalli, OSRAM, Traxon และสินค้าของบริษัทเซาท์อีสต์ไทยแลนด์ ภายใต้แบรนด์ LUCE นอกจากนี้ทางบริษัทฯ ยังมีบริการให้คำปรึกษาด้านแสงสว่างโดยผู้เชี่ยวชาญด้านแสงสว่าง รวมทั้งมีทีมออกแบบ (Lighting Designer) เพื่อให้บริการด้านการออกแบบ ไม่ว่าจะเป็นการออกแบบไฟภายใน ไฟภายนอกหรือแม้แต่ไฟประดับอาคาร ด้วยประสบการณ์อันยาวนานในการจัดจำหน่ายโคมไฟรวมถึงการให้บริการต่างๆ ด้านไฟฟ้าและแสงสว่างมากกว่า 50 ปี เราจึงมีกลุ่มลูกค้าที่ไว้วางใจ ในการใช้ผลิตภัณฑ์ของทาง บริษัทฯ ด้วยดีตลอดมา ไม่ว่าจะเป็นโครงการคอนโดมิเนียมชั้นนำโรงแรม อาคารสำนักงาน บ้านพักอาศัยร้านค้าต่างๆ เป็นต้นเราจึงมั่นใจได้ว่าเราเป็นหนึ่งในบริษัทที่ให้บริการสินค้าโคมไฟครบวงจรทุกประเภท ทุกสไตล์ ทุกบริการรวมถึงการบริการหลังการขายเพื่อตอบสนองความต้องการของลูกค้า



IG : southeast_thailand



FB : SoutheastThailandOfficial




WWW.SOUTHEASTTHAILAND.CO.TH

EMAIL : lighting@southeastthailand.co.th

MAP

SOUTHEAST THAILAND CO., LTD.
390/6-7-8 Sukhumvit Rd.,
Klongtoey, Klongtoey,
Bangkok, 10110 Thailand.

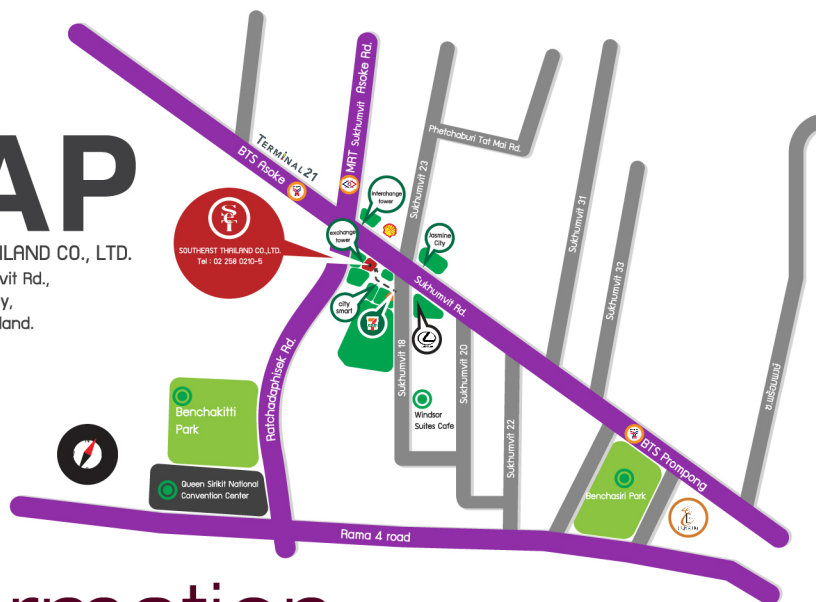

Map


02

information

Correlated Color Temperature (CCT)

Definition: the absolute temperature of a blackbody whose chromaticity most nearly resembles that of the light source. The correlated color temperature (CCT) is a specification of the color appearance of the light emitted by a lamp, relating its color to the color of light from a reference source when heated to a particular temperature, measured in degrees Kelvin (K). The CCT rating for a lamp is a general "warmth" or "coolness" measure of its appearance. However, opposite to the temperature scale, lamps with a CCT rating below 3200 K are usually considered "warm" sources, while those with a CCT above 4000 K are usually considered "cool" in appearance. The correlated color temperature (CCT) designation for a light source gives a good indication of the lamp's general appearance, but does not give information on its specific spectral power distribution. Therefore, two lamps may appear to be the same color, but their effects on object colors can be quite different, which could be further explained in color rendering index (CRI).

Reference: Lighting Research Centre (USA)

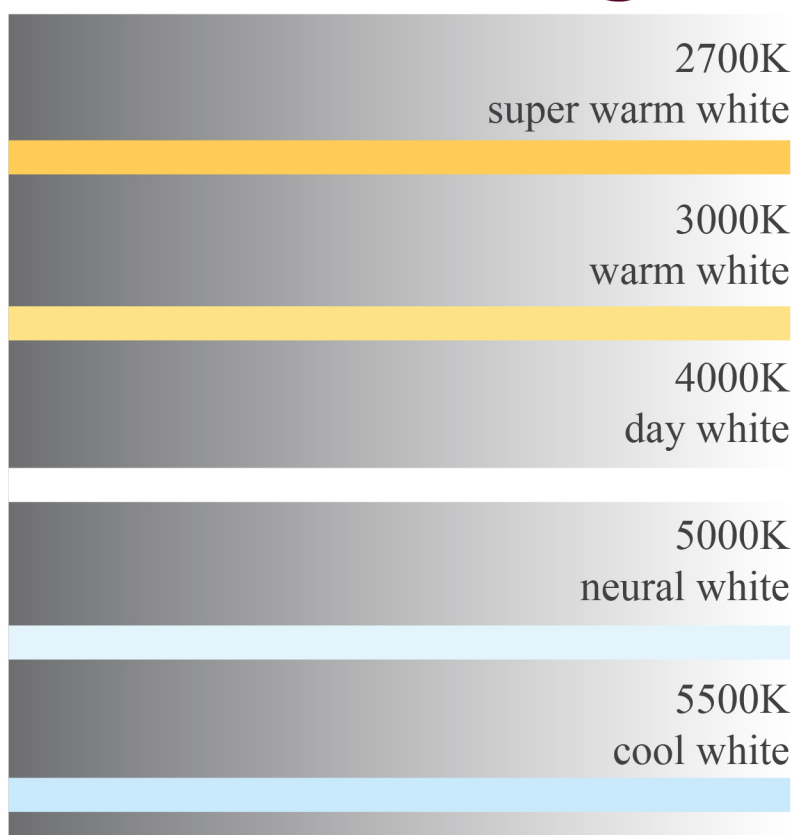

Easy guide to Colour Rendering Index (CRI)

you're looking at lamps, bulbs or any form of lights, you'll often notice how many products have a 'CRI' number, known was a 'Colour Rendering Index'. But what is 'CRI' and how does its rating effect our decision to make a purchase? Let BeamLED whittle down the facts for you in 'Your Guide to CRI'.

What is CRI?

CRI (Colour Rendering Index) is the standard measurement of a sources ability to reveal the colours of objects in comparison to a natural light source. The highest possible CRI is 100. This is the same colouring rendering as natural daylight which is often given to incandescent /halogen bulbs. The colour of the light is known as Correlated Colour Temperature (CC9) and is measured in Kelvin (K). Warmer/yellow bulbs = 3500k , whilst cooler/bluer bulbs = 6500k.

INTERIOR LIGHTING



Model




S1-DARK REFLECTOR 9.0 CIRCULAR

DOWNLIGHT



DIMENSION mm.

beam angle



1. Material : Aluminum die-cast + Polycarbonate
2. Reflector : Vacuum plastic
3. Dark light Effect UGR<19
4. Maximum adjustable 35 degree


LAMP DETAILS

LAMP TYPE	: LED Circular Downlight
HOUSING	: Aluminium die-casted + Polycarbonate Plastic
REFLECTOR	: Polycarbonate Plastic
DIFFUSER	: -
ACCESSORIES	: -
WIRING	: Cable size AWG 20. under 105°C maximum Voltage 600V, TIS No.11-2531
Input Voltage	: 220 Vac

LED CHIP



DRIVER



* UGR คือ

UGR (Unified Glare Rating System) เป็นเกณฑ์ตามมาตรฐาน CIE หรือ Commission International del'Eclairage) ในการประเมินแสงบาดตาของการให้แสงสว่างภายในอาคาร แทนการใช้กราฟแสงบาดตา โดยสเกลของค่า UGR คือ 13 16 19 22 25 และ 28 โดยค่า 13 หมายถึงมีแสงบาดตาน้อย ส่วน 28 หมายถึงมีแสงบาดตามาก

Model

S1-DARK REFLECTOR 11.5 CIRCULAR

DOWNLIGHT



20



shop



hospital



home



hotel





office



DIMENSION mm.

beam angle



1. Material : Aluminum die-cast + Polycarbonate
2. Reflector : Vacum plastic
3. Dark light Effect UGR<19
4. Maximum adjustable 35 degree

LAMP DETAILS

- LAMP TYPE** : LED Circular Downlight
- HOUSING** : Aluminium die-casted + Polycarbonate Plastic
- REFLECTOR** : Polycarbonate Plastic
- DIFFUSER** : -
- ACCESSORIES** : -
- WIRING** : Cable size AWG 20. under 105°C
maximum Voltage 600V, TIS No.11-2531
- Input Voltage** : 220 Vac

LED CHIP



DRIVER



MODULE SPECIFICATIONS

Lumen Out (lm)

Lumen Output (lm)							TOTAL POWER	CRI
2700K	3000K	3500K	4000K	5000K	5700K	6500K	W	Ra
870	920	940	960	960	-	-	9	>80
1070	1120	1150	1170	1170	-	-	11	
1250	1320	1340	1370	1370	-	-	13	
1420	1500	1530	1560	1560	-	-	15	
-	2290	2290	2380	2380	-	-	21	
-	2660	2670	2770	2770	-	-	25	
-	3680	3760	3830	3830	-	-	33	

* UGR คือ

UGR (Unified Glare Rating System) เป็นเกณฑ์ตามมาตรฐาน CIE หรือ Commission International del'Eclairage) ในการประเมินแสงบาดตาของการให้แสงสว่างภายในอาคาร แทนการใช้กราฟแสงบาดตา โดยสเกลของค่า UGR คือ 13 16 19 22 25 และ 28 โดยค่า 13 หมายถึงมีแสงบาดตาน้อย ส่วน 28 หมายถึงมีแสงบาดตามาก

Model



S1-DARK REFLECTOR 13.5 CIRCULAR

DOWNLIGHT



DIMENSION mm.

beam angle



1. Material : Aluminum die-cast + Polycarbonate
2. Reflector : Vacuum plastic
3. Dark light Effect UGR<19
4. Maximum adjustable 35 degree

LAMP DETAILS

- LAMP TYPE** : LED Circular Downlight
- HOUSING** : Aluminium die-casted + Polycarbonate Plastic
- REFLECTOR** : Polycarbonate Plastic
- DIFFUSER** : -
- ACCESSORIES** : -
- WIRING** : Cable size AWG 20. under 105°C
maximum Voltage 600V, TIS No.11-2531
- Input Voltage** : 220 Vac

MODULE SPECIFICATIONS


Lumen Out (lm)

Lumen Output (lm)							TOTAL POWER	CRI
2700K	3000K	3500K	4000K	5000K	5700K	6500K	W	Ra
870	920	940	960	960	-	-	9	>80
1070	1120	1150	1170	1170	-	-	11	
1250	1320	1340	1370	1370	-	-	13	
1420	1500	1530	1560	1560	-	-	15	
-	2290	2290	2380	2380	-	-	21	
-	2660	2670	2770	2770	-	-	25	
-	3680	3760	3830	3830	-	-	33	

LED CHIP



DRIVER



* UGR คือ

UGR (Unified Glare Rating System) เป็นเกณฑ์ตามมาตรฐาน CIE หรือ Commission International del'Eclairage) ในการประเมินแสงบาดตาของการให้แสงสว่างภายในอาคาร แทนการใช้กราฟแสงบาดตา โดยสเกลของค่า UGR คือ 13 16 19 22 25 และ 28 โดยค่า 13 หมายถึงมีแสงบาดตาน้อย ส่วน 28 หมายถึงมีแสงบาดตามาก

Model

S1-DARK REFLECTOR D315 **ADJUSTABLE TYPE**

DOWNLIGHT



IP20

<18
UGR




black



silver


beam angle



LED CHIP



DRIVER




MODULE SPECIFICATIONS

Lumen Out (lm)

Lumen Output (lm)							TOTAL POWER	CRI
2700K	3000K	3500K	4000K	5000K	5700K	6500K	W	Ra
-	700	-	730	730	-	-	7	>80
-	920	-	960	960	-	-	9	
-	1120	-	1170	1170	-	-	11	
-	1320	-	1370	1370	-	-	13	
-	1500	-	1560	1560	-	-	15	

DIMENSION mm.

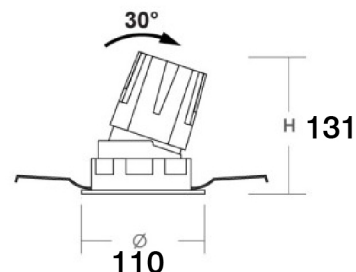

* UGR คือ

UGR (Unified Glare Rating System) เป็นเกณฑ์ตามมาตรฐาน CIE หรือ Commission International del'Eclairage) ในการประเมินแสงบาดตาของการให้แสงสว่างภายในอาคาร แทนการใช้กราฟแสงบาดตา โดยสเกลของค่า UGR คือ 13 16 19 22 25 และ 28 โดยค่า **13** หมายถึงมีแสงบาดตาน้อย ส่วน 28 หมายถึงมีแสงบาดตามาก

UNIT PRICE : xxx.-

Model


S1-DARK REFLECTOR D316 ADJUSTABLE TYPE

DOWNLIGHT




IP20

<17
UGR




beam angle



LED CHIP




DRIVER



MODULE SPECIFICATIONS

Lumen Out (lm)

Lumen Output (lm)							TOTAL POWER	CRI
2700K	3000K	3500K	4000K	5000K	5700K	6500K	W	Ra
-	700	-	730	730	-	-	7	>80
-	920	-	960	960	-	-	9	
-	1120	-	1170	1170	-	-	11	
-	1320	-	1370	1370	-	-	13	
-	1500	-	1560	1560	-	-	15	
-	2290	-	2772	2770	-	-	21	
-	2670	-	3830	3830	-	-	25	
-	3680	-	4800	4800	-	-	33	

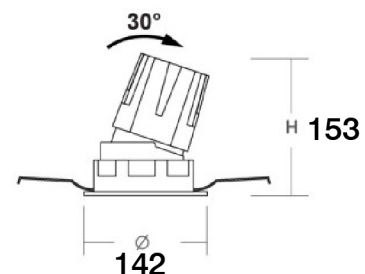

* UGR คือ

UGR (Unified Glare Rating System) เป็นเกณฑ์ตามมาตรฐาน CIE หรือ Commission International del'Eclairage) ในการประเมินแสงบาดตาของการให้แสงสว่างภายในอาคาร แทนการใช้กราฟแสงบาดตา โดยสเกลของค่า UGR คือ 13 16 19 22 25 และ 28 โดยค่า 13 หมายถึงมีแสงบาดตาน้อย ส่วน 28 หมายถึงมีแสงบาดตามาก

UNIT PRICE : xxx.-

Model

S1-DARK VENUS 17.5

DOWNLIGHT



shop



hospital



home



hotel



office

IP44



BEAM ANGLE



40°



CUTHOLE
Ø151mm



ADJUST
Fixed



TILTABLE
Fixed



LED CHIP




PHILIPS
(Netherlands)



CITIZEN (JAPAN)
LED COB High Color
GEN8 CRI 85

DRIVER





DRIVER OSRAM
(Germany)



PHILIPS

DIMENSION mm.



LAMP DETAILS

LAMP TYPE	:	led circular Downlight
Reflector	:	Electroplate inner ring
HOUSING	:	Super aluminium die-casted, Powder coated finished
COLOR	:	White, Black
WIRING	:	Cable size AWG 20. under 105 C maximum Voltage 600V, TIS No.11-2531

CURRENTS mA	LUMEN OUTPUT (lm)						MODULE EFFICACY (lm/W)						TOTAL WATTS
	2700K	3000K	3500K	4000K	5700K	6500K	2700K	3000K	3500K	4000K	5700K	6500K	
150	748	780	794	801	-	816	157	163	166	167	-	171	7W
200	985	1027	1045	1055	-	1075	153	160	162	164	-	167	9W
250	1216	1269	1291	1303	-	1328	150	156	159	160	-	163	11W
300	1443	1506	1532	1545	-	1575	146	153	155	157	-	160	13W
350	1665	1737	17967	1783	-	1817	143	150	152	154	-	157	15W
500	2331	2401	2443	2464	-	2512	135	141	143	154	-	147	21W
600	2703	2820	2869	2894	-	2950	130	136	138	139	-	142	25W
700	3086	3220	3276	3305	-	3369	125	131	133	134	-	137	30W

Model

S1-NOVA D1-3

DOWNLIGHT



IP
20



shop



hospital



home



hotel



office





**LOW
GLARE**



DIMENSION mm.

beam angle



LAMP DETAILS

- LAMP TYPE** : LED Circular Downlight
HOUSING : Aluminium die-casted + Powder coated finished
REFLECTOR : Polycarbonate Plastic
DIFFUSER : -
ACCESSORIES : -
WIRING : Cable size AWG 20. under 105°C
maximum Voltage 600V, TIS No.11-2531
Input Voltage : 220 Vac

LED CHIP



DRIVER



MODULE SPECIFICATIONS

Lumen Out (lm)

Lumen Output (lm)							TOTAL POWER	CRI
2700K	3000K	3500K	4000K	5000K	5700K	6500K	W	Ra
670	703	720	730	730	-	-	7	>80
870	920	940	960	960	-	-	9	
1070	1130	1150	1170	1170	-	-	11	
1250	1320	1340	1370	1370	-	-	13	
1420	1500	1530	1560	1560	-	-	15	

Model S1-MERCURY 5.5

DOWNLIGHT



IP RATING
44





JB1002GL-Micro Bright 80 fixed



DIMENSION mm.

beam angle




LED CHIP



LAMP DETAILS

- LAMP TYPE** : LED Circular Downlight
- HOUSING** : Aluminium die-casted + Powder coated finished
- REFLECTOR** : Aluminium
- DIFFUSER** : -
- ACCESSORIES** : -
- WIRING** : Cable size AWG 20. under 105 C
maximum Voltage 600V, TIS No.11-2531
- Input Voltage** : 220 Vac

DRIVER



MODULE SPECIFICATIONS

Lumen Out (lm)

Lumen Output (lm)							TOTAL POWER	CRI
2700K	3000K	3500K	4000K	5000K	5700K	6500K	W	Ra
620	650	-	700	710	-	-	7	>80

Model

S1-MERCURY 8.0

DOWNLIGHT



shop

hospital

home

hotel

office

IP RATING
44





JB1002GL-Micro Bright 80 fixed



DIMENSION mm.

beam angle



LED CHIP



DRIVER



DRIVER OSRAM (Germany)



LAMP DETAILS

- LAMP TYPE** : LED Circular Downlight
- HOUSING** : Aluminium die-casted + Polycarbonate Plastic
- REFLECTOR** : Aluminium
- DIFFUSER** : -
- ACCESSORIES** : -
- WIRING** : Cable size AWG 20. under 105°C
maximum Voltage 600V, TIS No.11-2531
- Input Voltage** : 220 Vac

MODULE SPECIFICATIONS

Lumen Out (lm)

Lumen Output (lm)							TOTAL POWER	CRI
2700K	3000K	3500K	4000K	5000K	5700K	6500K	W	Ra
670	700	720	730	730	-	-	7	>80
870	920	940	960	960	-	-	9	
1070	1130	1150	1170	1170	-	-	11	
1250	1320	1340	1370	1370	-	-	13	

Model

S1-VENUS 4S

DOWNLIGHT



IP 20



shop



hospital



home



hotel



office



DIMENSION mm.

beam angle



95°





Ø135mm.



ADJUST
FIXED




TILTABLE
FIXED



LED CHIP



DRIVER



LAMP DETAILS

- LAMP TYPE** : LED Circular Downlight
- HOUSING** : Aluminium die-casted + Polycarbonate Plastic
- REFLECTOR** : Aluminium
- DIFFUSER** : Opal acrylic
- ACCESSORIES** : -
- WIRING** : Cable size AWG 20. under 105°C
maximum Voltage 600V, TIS No.11-2531
- Input Voltage** : 220 Vac

MODULE SPECIFICATIONS

Lumen Out (lm)

Lumen Output (lm)							TOTAL POWER	CRI
2700K	3000K	3500K	4000K	5000K	5700K	6500K	W	Ra
670	700	720	730	730	-	-	7	>80
870	920	940	960	960	-	-	9	
1070	1130	1150	1171	1170	-	-	11	
1250	1320	1340	1370	1370	-	-	13	
1420	1500	1530	1560	1560	-	-	15	
1880	1980	2020	-	-	-	-	21	

Model

S1-PLUTO-S

DOWNLIGHT



IP 20



shop



hospital



home



hotel





office

Perfect for
high ceiling
about 3.5 m.



DIMENSION mm.

beam angle



LAMP DETAILS

- LAMP TYPE** : LED Circular Downlight
- HOUSING** : Colod rolled steel, Powder coated finished
- REFLECTOR** : Aluminium
- DIFFUSER** : None / Clear / Opal diffuser (on request)
- ACCESSORIES** : -
- WIRING** : Cable size AWG 20. under 105°C
maximum Voltage 600V, TIS No.11-2531
- Input Voltage** : 220 Vac

MODULE SPECIFICATIONS

Lumen Out (lm)

Lumen Output (lm)							TOTAL POWER	CRI
2700K	3000K	3500K	4000K	5000K	5700K	6500K	W	Ra
670	700	720	730	730	-	-	7	>80
870	920	940	960	960	-	-	9	
1070	1120	1150	1170	1170	-	-	11	
1250	1320	1340	1370	1370	-	-	13	
1420	1500	1530	1560	1560	-	-	15	
-	2290	2330	2380	2380	-	-	21	
-	2670	2720	2772	2770	-	-	25	
-	3680	3750	3830	3830	-	-	33	
-	4610	4700	4800	4800	-	-	42	

LED CHIP



DRIVER



DRIVER OSRAM (Germany)



Model

S1-PLANAT x1

DOWNLIGHT



IP 20



shop



hospital



home



hotel





office

Replace
QR-111



DIMENSION mm.

beam angle



LAMP DETAILS

- LAMP TYPE** : LED Square Downlight
- HOUSING** : Cold rolled steel, Powder coated finished
- REFLECTOR** : Aluminium
- DIFFUSER** : None / Clear / Opal diffuser (on request)
- ACCESSORIES** : -
- WIRING** : Cable size AWG 20. under 105°C
maximum Voltage 600V, TIS No.11-2531
- Input Voltage** : 220 Vac

MODULE SPECIFICATIONS


Lumen Out (lm)

Lumen Output (lm)							TOTAL POWER	CRI
2700K	3000K	3500K	4000K	5000K	5700K	6500K	W	Ra
670	700	720	730	730	-	-	7	>80
870	920	940	960	960	-	-	9	
1070	1120	1150	1170	1170	-	-	11	
1250	1320	1340	1370	1370	-	-	13	
1420	1500	1530	1560	1560	-	-	15	
-	2290	2330	2380	2380	-	-	21	
-	2670	2720	2772	2770	-	-	25	
-	3680	3750	3830	3830	-	-	33	
-	4610	4700	4800	4800	-	-	42	

LED CHIP



DRIVER



Model

S1-JUPITER-S

DOWNLIGHT



shop

hospital

home

hotel

office

Surface
down light



IP44 Protection Glass

DIMENSION mm.

beam angle



24°



45°





NONE



FIXED



FIXED



LAMP DETAILS

LAMP TYPE	LED Circular Downlight
HOUSING	Aluminium die-casted + Powder coated finished
REFLECTOR	Aluminium
DIFFUSER	Clear protection glass
ACCESSORIES	-
WIRING	Cable size AWG 20. under 105°C maximum Voltage 600V, TIS No.11-2531
Input Voltage	220 Vac

MODULE SPECIFICATIONS

Lumen Out (lm)

Lumen Output (lm)							TOTAL POWER	CRI
2700K	3000K	3500K	4000K	5000K	5700K	6500K	W	Ra
670	700	720	730	730	-	-	7	>80
870	920	940	960	960	-	-	9	
1070	1120	1150	1170	1170	-	-	11	
1250	1320	1350	1370	1370	-	-	13	

LED CHIP



DRIVER



Model

S1-SUPER BLUE

DOWNLIGHT



IP 20



shop



hospital



home



hotel





office



DIMENSION mm.


beam angle



LED CHIP



DRIVER



LAMP DETAILS

LAMP TYPE	LED Circular Downlight Surface
HOUSING	Colod rolled steel, Powder coated finished
REFLECTOR	Aluminium
DIFFUSER	None / Clear / Opal diffuser (on request)
ACCESSORIES	-
WIRING	Cable size AWG 20. under 105°C maximum Voltage 600V, TIS No.11-2531
Input Voltage	220 Vac

MODULE SPECIFICATIONS

Lumen Out (lm)

Lumen Output (lm)							TOTAL POWER	CRI
2700K	3000K	3500K	4000K	5000K	5700K	6500K	W	Ra
670	700	720	730	730	-	-	7	>80
870	920	940	960	960	-	-	9	
1070	1125	1150	1170	1170	-	-	11	
1250	1320	1340	1370	1370	-	-	13	
1420	1500	1530	1560	1560	-	-	15	
-	2300	2330	2380	2380	-	-	21	
-	2670	2720	2770	2770	-	-	25	

Model

S1-CERES-CIRCULAR



DOWNLIGHT



Accessory
Cylinder Tube

DIMENSION mm.

beam angle

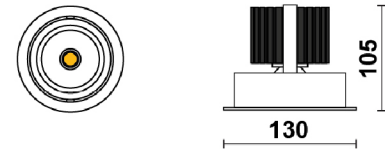

LAMP DETAILS

LAMP TYPE	LED Circular Downlight
HOUSING	Cold rolled steel, Powder coated finished
REFLECTOR	Aluminium
DIFFUSER	None / Clear / Opal diffuser (on request)
ACCESSORIES	Cylinder tube (on request)
WIRING	Cable size AWG 20. under 105°C
	maximum Voltage 600V, TIS No.11-2531
Input Voltage	220 Vac

MODULE SPECIFICATIONS


Lumen Out (lm)

Lumen Output (lm)							TOTAL POWER	CRI
2700K	3000K	3500K	4000K	5000K	5700K	6500K	W	Ra
670	700	720	730	730	-	-	7	>80
870	920	940	960	960	-	-	9	
1070	1120	1150	1170	1170	-	-	11	
1250	1320	1340	1370	1370	-	-	13	
1420	1500	1530	1560	1560	-	-	15	
-	2290	2330	2380	2380	-	-	21	
-	2670	2720	2772	2770	-	-	25	
-	3680	3750	3830	3830	-	-	33	
-	4610	4700	4800	4800	-	-	42	

LED CHIP



DRIVER



Model

S1-METEOR-V

DOWNLIGHT



Honeycomb






Different beam filters



3 Circuits track on requested and DALI track system also available

DIMENSION mm.

beam angle




LAMP DETAILS

LAMP TYPE	LED Tracklight
HOUSING	Aluminium die-casted + Powder coated finished
REFLECTOR	Aluminium
DIFFUSER	None / Clear / Opal diffuser (on request)
ACCESSORIES	Honey , Beam Filters
WIRING	Cable size AWG 20. under 105°C maximum Voltage 600V, TIS No.11-2531

LED CHIP



DRIVER

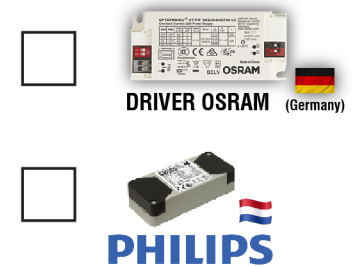

MODULE SPECIFICATIONS

Lumen Out (lm)

Lumen Output (lm)							TOTAL POWER	CRI
2700K	3000K	3500K	4000K	5000K	5700K	6500K	W	Ra
670	700	720	730	730	-	-	7	>80
870	920	940	960	960	-	-	9	
1070	1120	1150	1170	1170	-	-	11	
1250	1320	1340	1370	1370	-	-	13	
1420	1500	1530	1560	1560	-	-	15	
-	2290	2330	2380	2380	-	-	21	
-	2670	2720	2772	2770	-	-	25	
-	3680	3750	3830	3830	-	-	33	

Model S1-STEVE x1 SQUARE

DOWNLIGHT



IP 20



shop



hospital



home



hotel



office



117x117mm.




4 Side



30°

BEAM ANGLE



LED CHIP



DRIVER



MODULE SPECIFICATIONS

Lumen Out (lm)


Lumen Output (lm)							TOTAL POWER	CRI
2700K	3000K	3500K	4000K	5000K	5700K	6500K	W	Ra
670	700	720	730	730	-	-	7	>80
870	920	940	960	960	-	-	9	
1070	1120	1150	1170	1170	-	-	11	
1250	1320	1340	1370	1370	-	-	13	
1420	1500	1530	1560	1560	-	-	15	
-	2290	2330	2380	2380	-	-	21	
-	2670	2720	2772	2770	-	-	25	
-	3680	3750	3830	3830	-	-	33	
-	4610	4700	4800	4800	-	-	42	

LAMP DETAILS

- TYPE** : LED Square Downlight
HOUSING : Cold rolled steel, Powder coated finished
REFLECTOR : Aluminium
DIFFUSER : -
COLOR : White, Black
WIRING : Cable size AWG 20. under 105°C max 600V, TIS No.11-2531

UNIT PRICE : XXX.-

DIMENSION mm.

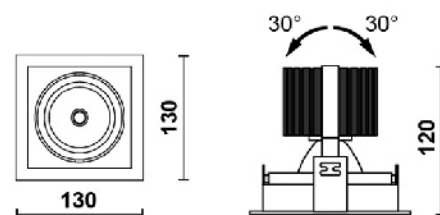

Model S1-STEVE x2 SQUARE

DOWNLIGHT



117x232mm.



4 Side



30°

BEAM ANGLE



14°



24°



38°



60°


LED CHIP



DRIVER



DIMENSION mm.

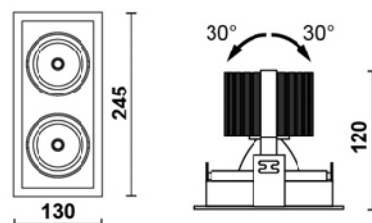

MODULE SPECIFICATIONS

Lumen Out (lm)

Lumen Output (lm)							TOTAL POWER	CRI
2700K	3000K	3500K	4000K	5000K	5700K	6500K	W	Ra
1340	1410	1430	1460	1460	-	-	14	>80
1750	1840	1880	1920	1920	-	-	18	
2140	2250	2300	2340	2340	-	-	22	
2500	2650	2690	2740	2740	-	-	26	
2840	2630	3050	3110	3110	-	-	30	
-	4570	4660	4760	4760	-	-	42	
-	5330	5440	5540	5550	-	-	50	
-	7360	7510	7650	7660	-	-	66	
-	9220	9410	9590	9590	-	-	84	

LAMP DETAILS

- TYPE** : LED Square Downlight
HOUSING : Cold rolled steel, Powder coated finished
REFLECTOR : Aluminium
DIFFUSER : -
COLOR : White, Black
WIRING : Cable size AWG 20. under 105°C max 600V, TIS No.11-2531

UNIT PRICE : XXX.-

Model

S1-MILKY WAY x2

DOWNLIGHT



MIN. 1000-0001



shop



hospital



home




hotel




office




Surface type can be installed with sling suspension kit




Recessed type can be installed with ceiling clamps



Luminaires can be continuously installed in row



Surface type can be installed at ceiling surface



Recessed type can be hanged with wires or rods





Opal diffuser can be easily slid or pulled out from housing

DIMENSION mm.

beam angle



80x2250mm. (RECESSED)

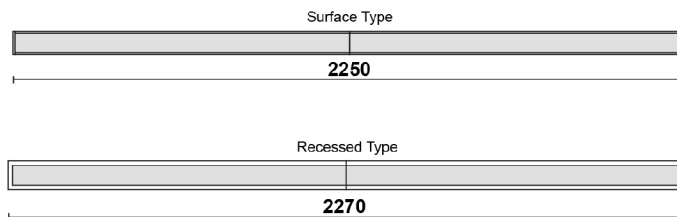

LAMP DETAILS

LAMP TYPE	LED Batten
HOUSING	Colod rolled steel, Powder coated finished
REFLECTOR	-
DIFFUSER	Opal actylic
ACCESSORIES	Sling wires for pendent mounted (on request)
WIRING	Cable size AWG 20. under 105°C
	maximum Voltage 600V, TIS No.11-2531
Input Voltage	220Vac

LED CHIP




MODULE SPECIFICATIONS

Lumen Out (lm)

Lumen Output (lm)							TOTAL POWER	CRI
2700K	3000K	3500K	4000K	5000K	5700K	6500K	W	Ra
-	6300 9020	-	9790 9720	-	-	6790 9720	52 78	>80

DRIVER

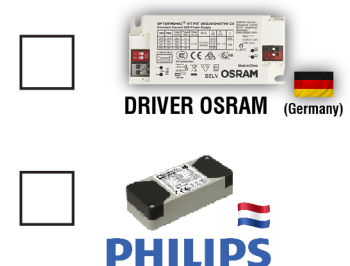

Model

S1-LUNA CIRCULAR 3.5

DOWNLIGHT



IP 20



shop



hospital



home




hotel



office



DIMENSION mm.



PRODUCT SPECIFICATION

TYPE	:	Recessed Circular Downlight
SOCKET	:	E27
HOUSING	:	Cold rolled steel, Powder coated finished
REFLECTOR	:	None
COLOR	:	Off-white, Back

MODULE SPECIFICATIONS

Lumen Out (lm)

Pieces	Lamps	Lumen Output			Temperature	watt	Replace
		2700K	3000K	6500K			
1	LED Bulb 6-50W E27 230V A60	-	470	470	3000K, 6500K	6W	50W
1	LED Bulb 7-60W E27 230V A60	-	600	600	3000K, 6500K	7W	60W
1	LED Bulb 9.5-70W E27 230V A60	-	806	806	3000K, 6500K	9.5W	70W
1	LED Bulb 10.5-85W E27 230V A60	-	1055	1055	3000K, 6500K	10.5W	85W
1	LED Bulb 13-100W E27 230V A60	-	1400	1400	3000K, 6500K	13W	100W
1	Master LED Bulb 6DT 6-40W E27 A60	470	-	-	2700K	6W	40W
1	Master LED Bulb 6DT 6-60W E27 A60	806	-	-	2700K	9W	60W
1	Scene Switch CCT 9.5-70W E27 A60	-	806	806	3000K, 6500K	9.5W	70W

UNIT PRICE : xxx.-

Model

S1-LUNA SQUARE 4.0




DOWNLIGHT



IP
20



DIMENSION mm.



PRODUCT SPECIFICATION

TYPE	Recessed Circular Downlight
SOCKET	E27
HOUSING	Cold rolled steel, Powder coated finished
REFLECTOR	None
COLOR	Off-white, Back

MODULE SPECIFICATIONS Lumen Out (lm)



Pieces	Lamps	Lumen Output			Temperature	watt	Replace
		2700K	3000K	6500K			
1	LED Bulb 6-50W E27 230V A60	-	470	470	3000K, 6500K	6W	50W
1	LED Bulb 7-60W E27 230V A60	-	600	600	3000K, 6500K	7W	60W
1	LED Bulb 9.5-70W E27 230V A60	-	806	806	3000K, 6500K	9.5W	70W
1	LED Bulb 10.5-85W E27 230V A60	-	1055	1055	3000K, 6500K	10.5W	85W
1	LED Bulb 13-100W E27 230V A60	-	1400	1400	3000K, 6500K	13W	100W
1	Master LED Bulb 6DT 6-40W E27 A60	470	-	-	2700K	6W	40W
1	Master LED Bulb 6DT 6-60W E27 A60	806	-	-	2700K	9W	60W
1	Scene Switch CCT 9.5-70W E27 A60	-	806	806	3000K, 6500K	9.5W	70W

UNIT PRICE : xxx.-



Model

S1-NEBULA

DOWNLIGHT

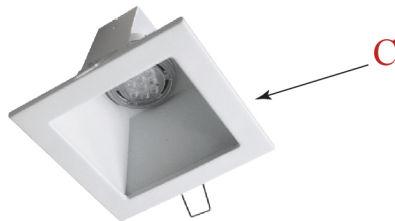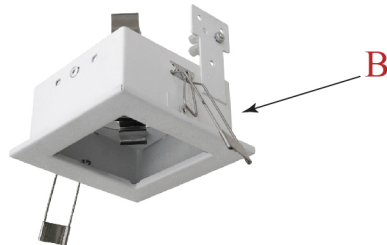

DIMENSION mm.



PRODUCT SPECIFICATION

TYPE	Recessed Circular / Square Downlight
SOCKET	MR16
HOUSING	Cold rolled steel, Powder coated finished
REFLECTOR	None
COLOR	Off-white, Back

A

UNIT PRICE : xxx.-

B

UNIT PRICE : xxx.-

C

UNIT PRICE : xxx.-

MODULE SPECIFICATIONS Lumen Out (lm)

Pieces	Lamps	Lumen Output			Temperature	watt	Replace
		2700K	3000K	6500K			
1	Entry Range MASTER LED 4-35W MR16	210	240	-	2700K, 3000K	4W	35W
1	Entry Range MASTER LED 5.5-50W MR16	415	425	450	2700K, 3000K, 4000K	5.5W	50W
1	Premium Range MASTER LED 7-50W MR16	420	440	460	2700K, 3000K, 4000K	7W	50W
1	Premium Range MASTER LED 6.5-50W MR16	420	470	490	2700K, 3000K, 4000K	6.5W	50W

Model

HCP4002-3


DOWNLIGHT

**ANODIZED
REFLECTOR**



MODEL	:	HCP4002-3
LAMP	:	1xE27
COLOR	:	WHITE
MATERIAL	:	HIGH COLD-ROLLED STEEL SHEET
REFLECTOR	:	ALUMINIUM ANODIZED REFLECTOR (DIAMOND)

DIMENSION

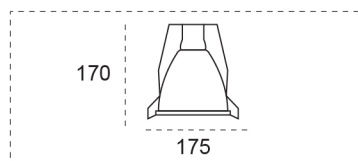

LED REPLACEMENT



LED-BULB



TC-TSE / E27

UNIT PRICE : 80.-

Model


CS401A

DOWNLIGHT



MODEL	:	CS401A
LAMP	:	1xE27
COLOR	:	WHITE
MATERIAL	:	HIGH COLD-ROLLED STEEL SHEET
DIFFUSER	:	FROSTED GLASS DIFFUSER

DIMENSION



LED REPLACEMENT



LED-BULB



TC-TSE / E27

UNIT PRICE : 180.-

Model


B-6335-1

DOWNLIGHT



MODEL : B-6335-1
LAMP : 1xE27
COLOR : WHITE
MATERIAL : STEEL AND POLISHED REFLECTOR

DIMENSION

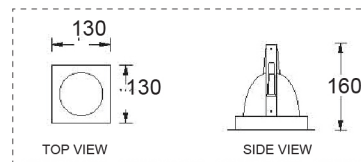

LED REPLACEMENT



LED-BULB



TC-TSE / E27

UNIT PRICE : 240.-

Model


B-0340

DOWNLIGHT



MODEL : B-0340
LAMP : 1xE27
COLOR : WHITE
MATERIAL : HIGH COLD-ROLLED STEEL SHEET
REFLECTOR : ALUMINIUM ANODIZED REFLECTOR (DIAMOND)

DIMENSION

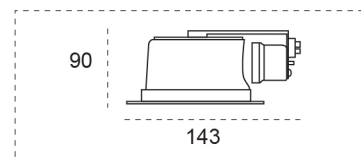

LED REPLACEMENT



LED-BULB



TC-TSE / E27

UNIT PRICE : 100.-

Model

WT-CL48-8

DOWNLIGHT




IP20



COMPATIBLE BULB
TC-TSE / E27
20W (x2)

MODEL : WT-CL48-8
LAMP : 1xE27
COLOR : WHITE, BLACK
MATERIAL : PAINTED METAL PLATE
DIFFUSER : OPAL POLYCARBONATE
INSTALLATION : METAL PLATE WITH WITH CLIP LOCK

DIMENSION

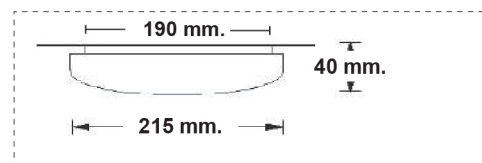

LED REPLACEMENT



TC-TSE / E27



LED

UNIT PRICE : 150.-



Model

L7430-6


DOWNLIGHT



IP20

MODEL : L7430-6
LAMP : LED 6W 3000K
COLOR : WHITE
MATERIAL : DIE-CAST ALUMINIUM

DIMENSION

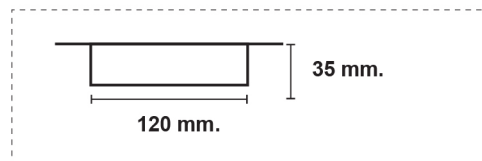

LED REPLACEMENT



LED CHIP

UNIT PRICE : 200.-

Model

DL-2633F

DOWNLIGHT




ALU

IP20

MODEL : DL-2633F
LAMP : 1xMR16 MAX.50W GU5.3/12V EXCL.TRANSFORMER
COLOR : SAND WHITE
MATERIAL : ALUMINUM + GLASS + STEEL

DIMENSION

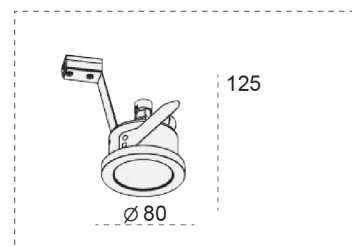

LED REPLACEMENT



MR16

UNIT PRICE : 350.-

Model


DL-5600

DOWNLIGHT



MODEL : DL-5600
LAMP : 1xMR16 MAX.50W GU5.3/12V EXCL.TRANSFORMER
COLOR : SAND WHITE
MATERIAL : ALUMINUM

DIMENSION



LED REPLACEMENT



MR16

UNIT PRICE : 300.-

Model


DL-6600

DOWNLIGHT



MODEL : DL-6600
LAMP : 1xMR16 MAX.50W GU5.3/12V EXCL.TRANSFORMER
COLOR : SAND WHITE
MATERIAL : ALUMINUM

DIMENSION



LED REPLACEMENT




MR16

UNIT PRICE : 300.-


EASY-MR16

DOWNLIGHT

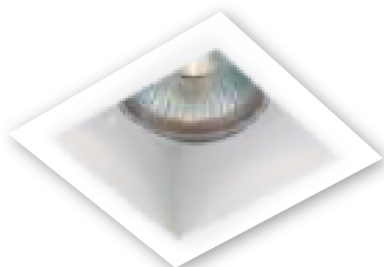

MODEL : EASY-MR16
LAMP : 1xMR16 MAX.50W GU5.3/12V EXCL.TRANSFORMER
COLOR : SAND WHITE
MATERIAL : STEEL + ALUMINUM

DIMENSION



LED REPLACEMENT




MR16

UNIT PRICE : 400.-


Model EASY2-MR16

DOWNLIGHT

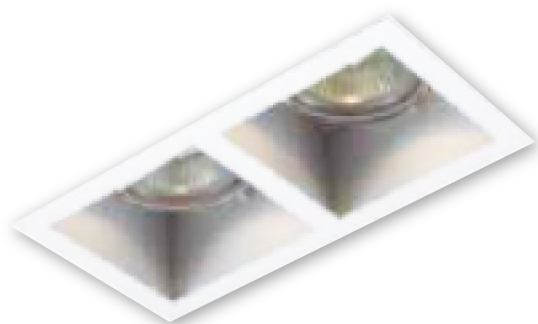

MODEL : EASY2-MR16
LAMP : 2xMR16 MAX.50W GU5.3/12V EXCL.TRANSFORMER
COLOR : SAND WHITE
MATERIAL : STEEL + ALUMINUM

DIMENSION



LED REPLACEMENT




MR16

UNIT PRICE : 620.-

Model


EASY HIDE-MR16

DOWNLIGHT

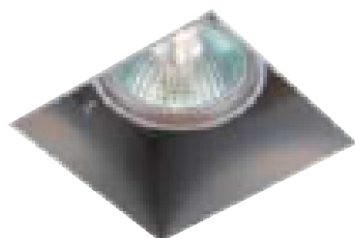

MODEL : EASY HIDE-MR16
LAMP : 1xMR16 MAX.50W GU5.3/12V EXCL.TRANSFORMER
COLOR : SAND WHITE
MATERIAL : STEEL + ALUMINUM

DIMENSION



LED REPLACEMENT




MR16

MOUNTING KIT1

MATERIAL:ALU+STEEL

110x110 H140



LED REPLACEMENT




MR16

UNIT PRICE : 800.-

Model


EASY2 HIDE-MR16

DOWNLIGHT

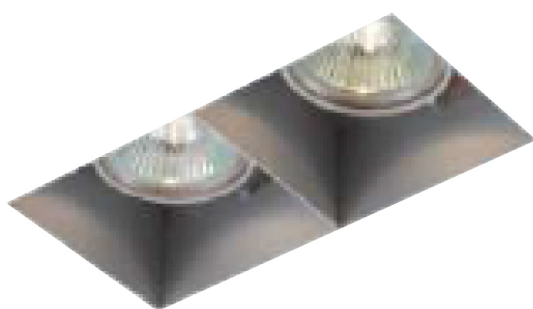

MODEL : EASY2 HIDE-MR16
LAMP : 2xMR16 MAX.50W GU5.3/12V EXCL.TRANSFORMER
COLOR : SAND WHITE
MATERIAL : STEEL + ALUMINUM

DIMENSION



LED REPLACEMENT




MR16

MOUNTING KIT2

MATERIAL:ALU+STEEL

191x110 H140



LED REPLACEMENT



MR16

UNIT PRICE : 1,000.-

Model


FASHION-MR16

DOWNLIGHT



MODEL : FASHION-MR16
LAMP : 1xMR16 MAX.50W GU5.3/12V EXCL.TRANSFORMER
COLOR : SAND WHITE
MATERIAL : ALUMINUM DIE-CAST + STEEL

DIMENSION

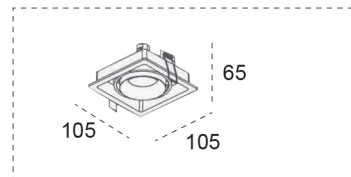

LED REPLACEMENT




MR16

UNIT PRICE : 570.-

Model


GD-1641

DOWNLIGHT

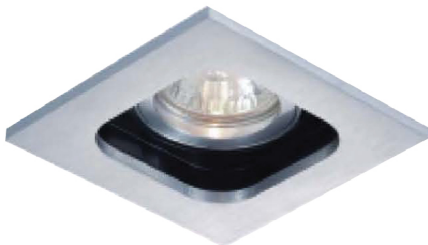

MODEL : GD-1641
LAMP : 1xMR16 MAX.50W GU5.3/12V EXCL.TRANSFORMER
COLOR : WHITE/BLACK, WHITE/WHITE, ALU BRUSH/BLACK
MATERIAL : ALUMINUM DIE-CAST + ALUMINUM

DIMENSION

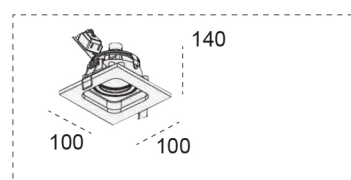

LED REPLACEMENT




MR16

UNIT PRICE : 400.-

Model


HORN SQ-MR16

DOWNLIGHT

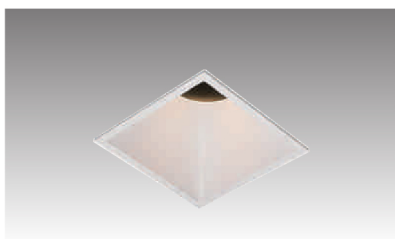

MODEL : HORN SQ-MR16
LAMP : 1xMR16 Max.50W GU 5.3 / 12V EXCL.TRANSFORMER
COLOR : SAND WHITE
MATERIAL : ALUMINUM DIE-CAST

DIMENSION



LED REPLACEMENT



MR16

UNIT PRICE : 600.-

Model

S1-LASER BLADE 1906

LINER LIGHT



MIN.1685-3851

IP
40



shop



hospital



home




hotel



office




Ultrathin LED linear light


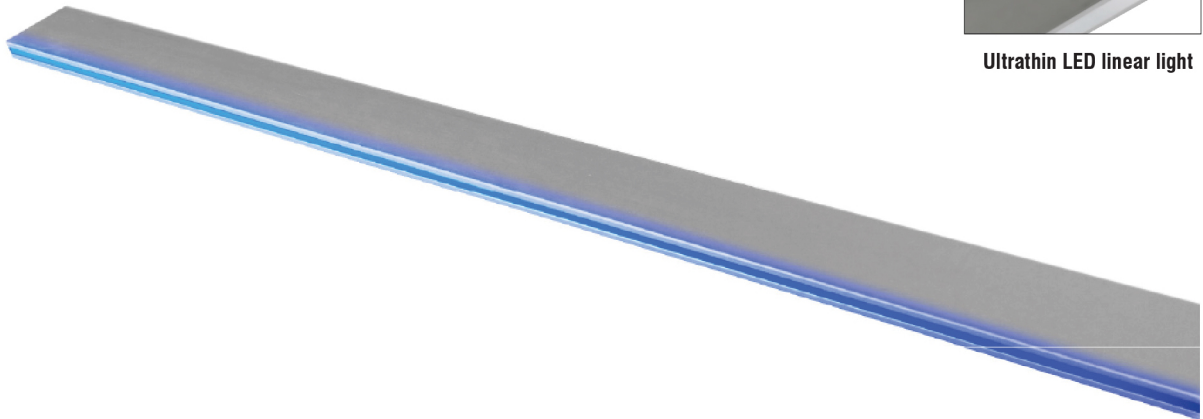


LAMP DETAILS

LAMP TYPE	:	LED LINEAR
HOUSING	:	Aluminum
MOUNTED	:	Recessed mounted
LED CHIP	:	SMD 3014
CRI	:	>90
POWER	:	12W
LUMEN	:	400lm
CCT	:	2200°~6500°K
TEMPERATURE	:	-25°C~+60°C






Trimless aluminium for recessed mounted



Attach together with magnets bar

DIMENSION (mm.)

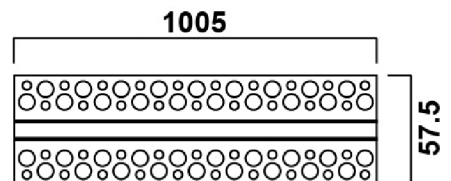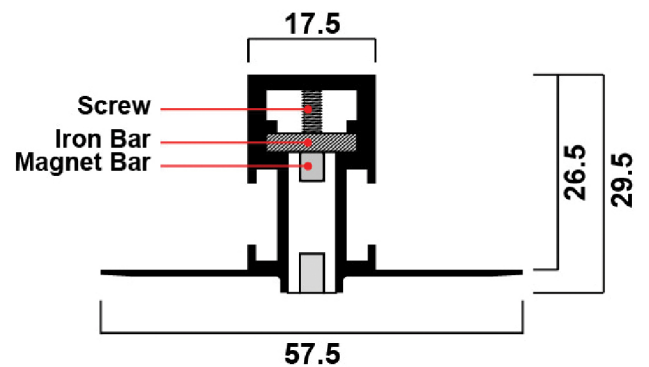


UNIT PRICE : xxxx.-

Model

S1-MAGGY LED TUNABLE WHITE

LINER LIGHT

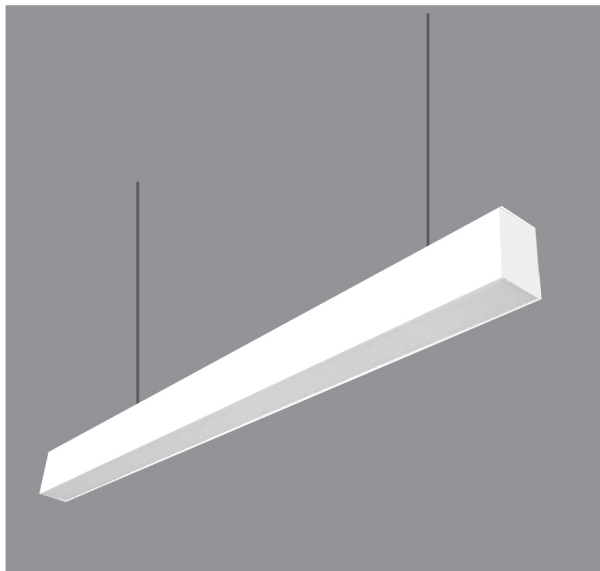

LAMP DETAILS


TYPE	:	led Linear
HOUSING	:	cold rolled steel, Powder coated finished
DIFFUSER	:	PC Cover
LED CHIP	:	VOSSLOH SCHWABE (Germany)
WIRING	:	Cable size AWG 22. under 105°C maximum Voilage 600V, TIS No.11-2531



New dimmable solution combining RF 2.4G wireless communication technology with digital LED driver!

Color and brightness dimmable


Our Product is dimmable on the color and brightness.

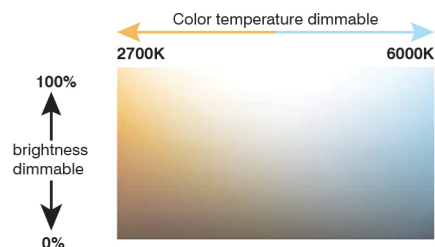

DIMENSION mm.



CUTHOLE
None

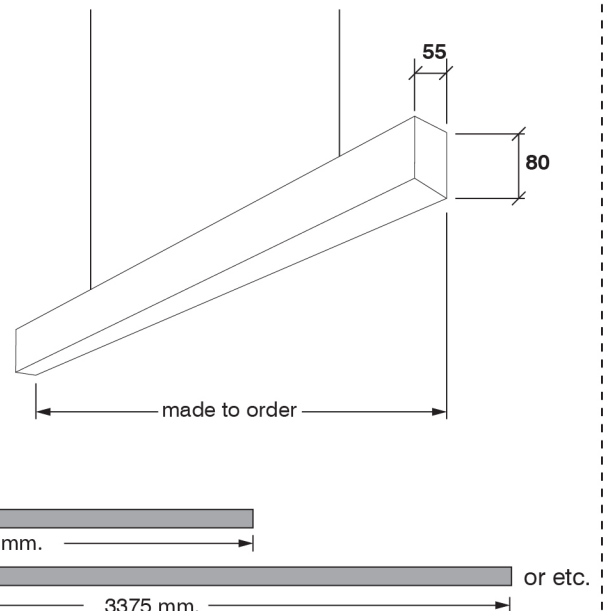

Pcs.	LED Modules	Tc	Currents	Typical Lumen (lm)	Module Efficacy (lm/w)	CRI	Total	Life Time
		°C	mA	2700K-6000K	2700K-6000K	Ra	Power	/Hours
2	WU-M-525 559734	50	350 500 700	1490-1688 2096-2376 2872-3256	128-146 123-139 116-132	>80	11.6 W 17.2 W 24.6W	50,000

Model

HORN-MR16-BK


DOWNLIGHT



SPECIFICATION

MODEL	: HORN-MR16
LAMP	: 1xMR16 Max.50W GU 5.3 / 12V (Exclude bulb and Transformer)
COLOR	: SAND BLACK
MATERIAL	: ALU DIE-CAST

DIMENSION (mm.)



LED REPLACEMENT



LED MR16 6.5W

/



LED MR16 4.5W

UNIT PRICE : XXX.-

