

www.southeastthailand.co.th

www.southeastthailand.co.th

PRODUCT

LANDSCAPE LIGHTING AND FACADE LIGHTING

www.southeastthailand.co.th

Vol.6



LUCIE



SALES Contact

LIGHTING

Tel: +66 (0) 85 661 7769



Tel : (662) 258-0210-5

Fax : (662) 258-1919

Email : Info@southeastthailand.co.th

ABOUT

Visit Our Show Room & Our Team



Southeast Thailand Co., Ltd. distributes a wide variety of lamps, including general-purpose interior and exterior lighting. We offer modern, unique lamp designs suitable for a variety of applications, including LED lamps such as downlights, wall lamps, ceiling lamps, and many other types of lamps. We offer a wide range of styles and designs,



from modern to classic, suitable for both indoor and outdoor use. Our state-of-the-art manufacturing standards ensure the quality of our LED chips, using world-class brands such as Lumileds, Cree, and Bridgelux, ensuring international standards and quality. Our representative products include European imports such as Klewe,

SOUTHEAST THAILAND CO., LTD.

Vistosi, Roger Pradier, and Traxon, as well as Southeast Thailand products under the LUCE brand. With our consistent success in using our products, whether for projects like premium condominiums, hotels, office buildings, residences, and shops, we are confident that we are one of the leading companies



offering a complete range of lighting products, all types, styles, and services, including after-sales service, to meet our customers' needs. Furthermore, we offer lighting consultation services by lighting experts, and have lighting designers to provide design services, whether for interior, exterior, or decorative lighting.

With over 50 years of experience in distributing lamps and providing various electrical and lighting services, we have a loyal customer base.



SOUTHEASTTHAILANDOFFICIAL



SOUTHEAST_THAILAND



WWW.SOUTHEASTTHAILAND.CO.TH

MAP

SOUTHEAST THAILAAND CO., LTD

390/6-7-8 Sukhumvit Rd.,
Klongtoey, Klongtoey,
Bongkok, 10110 Thailand



INFORMATION

Correlated Color Temperature (CCT)

Definition: the absolute temperature of a blackbody whose chromaticity most nearly resembles that of the light source. The correlated color temperature (CCT) is a specification of the color appearance of the light emitted by a lamp, relating its color to the color of light from a reference source when heated to a particular temperature, measured in degrees Kelvin (K). The CCT rating for a lamp is a general "warmth" or "coolness" measure of its appearance. However, opposite to the temperature scale, lamps with a CCT rating below 3200 K are usually considered "warm" sources, while those with a CCT above 4000 K are usually considered "cool" in appearance. The correlated color temperature (CCT) designation for a light source gives a good indication of the lamp's general appearance, but does not give information on its specific spectral power distribution. Therefore, two lamps may appear to be the same color, but their effects on object colors can be quite different, which could be further explained in color rendering index (CRI).

Reference: Lighting Research Centre (USA)




Easy guide to Colour Rendering Index (CRI)

you're looking at lamps, bulbs or any form of lights, you'll often notice how many products have a 'CRI' number, known was a 'Colour Rendering Index'. But what is 'CRI' and how does its rating effect our decision to make a purchase? Let BeamLED whittle down the facts for you in 'Your Guide to CRI'.

What is CRI?

CRI (Colour Rendering Index) is the standard measurement of a sources ability to reveal the colours of objects in comparison to a natural light source. The highest possible CRI is 100. This is the same colouring rendering as natural daylight which is often given to incandescent /halogen bulbs. The colour of the light is known as Correlated Colour Temperature (CC9) and is measured in Kelvin (K). Warmer/yellow bulbs = 3500K , whilst cooler/bluer bulbs = 6500K.

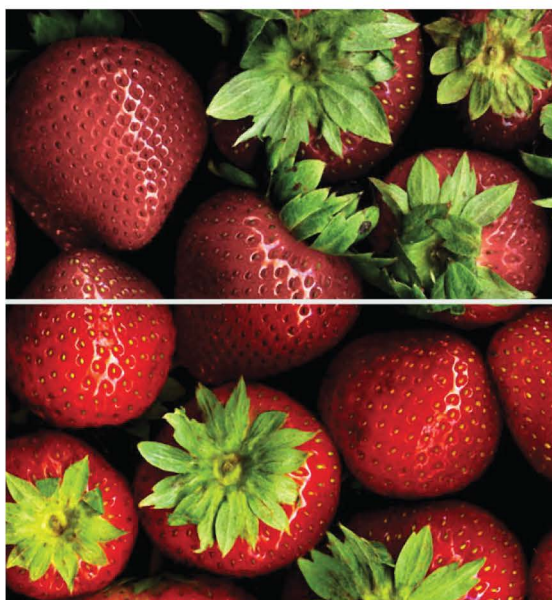



CONTENT

- 01** | BOLLARDS LIGHT
- 02** | FLOODLIGHT
- 03** | CEILING LIGHT
- 04** | WALLS LIGHT
- 05** | STEP LIGHT
- 06** | INGROUND
- 07** | ON GROUND


- 08** | UNDERWATER LIGHT
- 09** | LED STRIP LIGHT
- 10** | GARDEN LIGHT
- 11** | STREET LIGHT
- 12** | CLASSIC LAMP
- 13** | SOLAR LIGHT
- 14** | SOLAR LIGHT





BOLLARDS LIGHT



DIMENSION (Unit mm.)



PHOTOMETRIC DATA



CREE

CHIP LED

15

WATT

IP65

DIE-CAST
ALUMINIUM
MATERIAL

ANTHRACITE
COLOR

CE


ARA MAXI

BOLLARD LIGHT

SPECIFICATION

Model	: ARA MAXI
Item No.	: H1743-650
Light source	: LED Chip
Power	: 15W
Lumen	: 1500 lm
Lumen/Watt	: 100 lm/W
CCT	: 3000K
CRI	: >80
Beam Angle	: 47°
Material	: Die-cast Aluminium
Color	: Anthracite
Paint method	: Outdoor UV Spray Powder
Optical cover	: Safety glass lens
Adjustable	: -
IP	: 65
Driver Type	: Driver on Board
Input Voltage	: 220-240V~ 50Hz
Power factor	: >0.96
Dimension (WxLxH)	: 140x140x650 mm.

ACCESSORY



Plate



J Bolts



Hex Wrench



Cable Gland




Acorn Nuts




Washer
Washers

+ Installation Manual



UNIT PRICE : 6,500.-

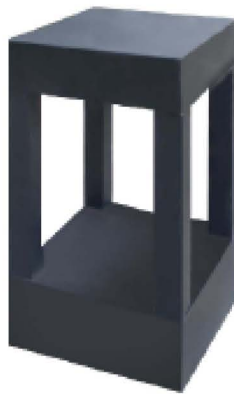

DIMENSION (Unit mm.)

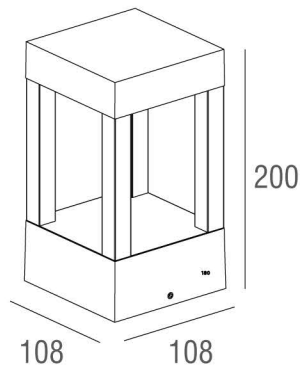

PHOTOMETRIC DATA



LED

7
WATT

IP65

ALUMINIUM
MATERIAL

MATT
BLACK
COLOR

ECO

LC-WD-C240 BOLLARD LIGHT

SPECIFICATION

Model	: LC-WD-C240
Light source	: LED Chip
Power	: 7W
Lumen	: 700 lm
Lumen/Watt	: 100 lm/W
CCT	: 3000K
CRI	: >80
Beam Angle	: 38°
Material	: Aluminium
Color	: Matt Black
Paint method	: Outdoor UV Spray Powder
Optical cover	: Tempered glass
Adjustable	: -
IP	: 65
Driver Type	: Built-in Driver
Input Voltage	: 200-240V~ 50Hz
Power factor	: >0.96 Hex Wrench
Dimension (WxLxH)	: 108x108x200 mm.


ACCESSORY




UNIT PRICE : 2,200.-



DIMENSION (Unit mm.)

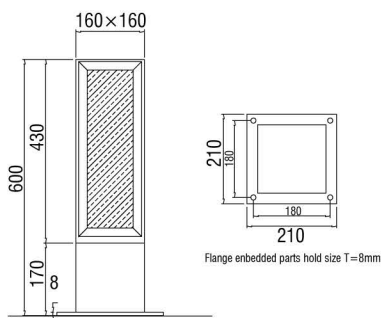

PHOTOMETRIC DATA

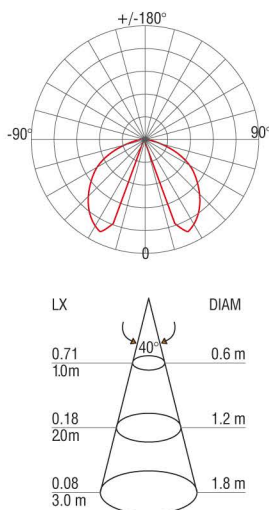

LC-WD-C1098

BOLLARD LIGHT

CREE

CHIP LED

7

WATT

IP65

ALUMINIUM
MATERIAL

MATT
ANTHRACITE
COLOR


SPECIFICATION

Model	: LC-WD-C1098
Light source	: LED Chip
Power	: 7W
Lumen	: 700 lm
Lumen/Watt	: 100 lm/W
CCT	: 3000K
CRI	: >80
Beam Angle	: 40°
Material	: Aluminum + white Oil Tempered Glass
Color	: Matt Anthracite (V322401S)
Paint method	: Outdoor UV Spray Powder
Diffuser	: Tempered glass
Adjustable	: -
IP	: 65
Driver Type	: Built-in Driver
Input Voltage	: 200-240V~ 50Hz
Power factor	: >0.96
Dimension (WxLxH)	: 160x160x600 mm.


UNIT PRICE : 8,500.-



DIMENSION (Unit mm.)

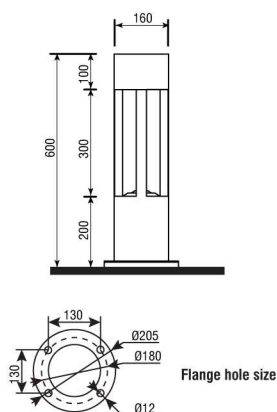

PHOTOMETRIC DATA

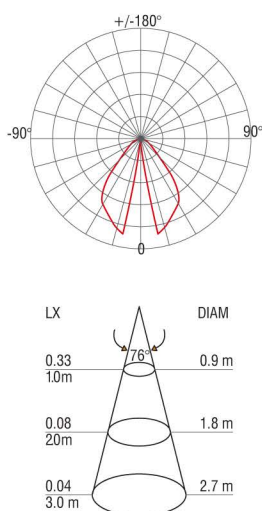

LC-WD-C411A

BOLLARD LIGHT

CREE
CHIP LED

7
WATT

IP65

ALUMINIUM
MATERIAL

MATT
ANTHRACITE
COLOR


SPECIFICATION

Model	: LC-WD-C411A
Light source	: LED Chip
Power	: 7W
Lumen	: 700 lm
Lumen/Watt	: 100 lm/W
CCT	: 3000K
CRI	: >80
Beam Angle	: 76°
Material	: Aluminum
Color	: Matt Anthracite (V322401S)
Paint method	: Outdoor UV Spray Powder
Optical cover	: Polycarbonate
Adjustable	: -
IP	: 65
Driver Type	: Built-in Driver
Input Voltage	: 200-240V~ 50Hz
Power factor	: >0.96
Dimension (ØxH)	: Ø160x600 mm.



UNIT PRICE : 6,000.-



DIMENSION (Unit mm.)

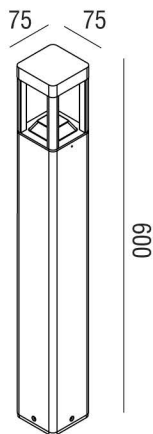

PHOTOMETRIC DATA



CREE
CHIP LED

7
WATT

IP65

DIE-CAST
ALUMINIUM
MATERIAL

ANTHRACITE
COLOR

CE

TRANSIT

BOLLARD LIGHT

SPECIFICATION

Model	: TRANSIT
Item No.	: 1530103
Light source	: LED Chip
Power	: 7W
Lumen	: 700 lm
Lumen/Watt	: 100 lm/W
CCT	: 3000K
CRI	: >80
Beam Angle	: 42°
Material	: Die-cast Aluminium
Color	: Anthracite
Paint method	: Outdoor UV Spray Powder
Optical cover	: Safety glass lens
Adjustable	: -
IP	: 65
Driver Type	: Built-in Driver
Input Voltage	: 200-240V~ 50Hz
Power factor	: >0.96
Dimension (WxLxH)	: 75x75x600 mm.

ACCESSORY



Washers Acorn Nuts




J Bolts

+ Installation Manual



UNIT PRICE : 6,600.-



DIMENSION (Unit mm.)

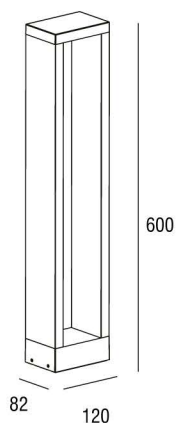

PHOTOMETRIC DATA



PILUM

BOLLARD LIGHT

CREE

CHIP LED

10

WATT

IP65

DIE-CAST
ALUMINIUM
MATERIAL

ANTHRACITE
COLOR

CE

SPECIFICATION

Model	:	PILUM
Item No.	:	2120103
Light source	:	LED Chip
Power	:	10W
Lumen	:	1000 lm
Lumen/Watt	:	100 lm/W
CCT	:	3000K
CRI	:	>80
Beam Angle	:	52°
Material	:	Die-cast Aluminium
Color	:	Anthracite
Paint method	:	Outdoor UV Spray Powder
Optical cover	:	Safety glass lens
Adjustable	:	-
IP	:	65
Driver Type	:	Driver On Board
Input Voltage	:	220-240V~ 50Hz
Power factor	:	>0.96
Dimension (WxLxH)	:	82 x 120 x 600 mm.

ACCESSORY



J Bolts



Stainless Steel
Cable Gland



Hex Wrench



Plate



Washer




Acorn Nuts

+ Installation Manual


UNIT PRICE : 6,000.-



DIMENSION (Unit mm.)

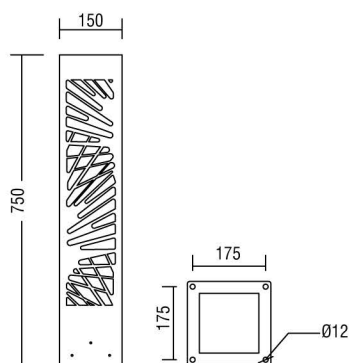

OPTIONS TYPE

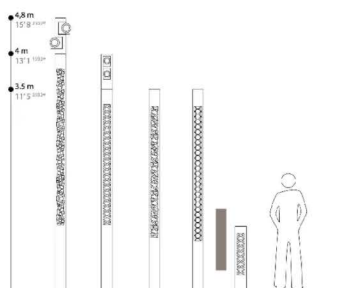

CREE

CHIP LED

7

WATT

IP65

ALUMINIUM
MATERIAL

ANTHRACITE
COLOR


LC-WD-C1099

BOLLARD LIGHT

SPECIFICATION

Model	: LC-WD-C1099
Light source	: LED Chip
Power	: 7W
Lumen	: 700 lm
Lumen/Watt	: 100 lm/W
CCT	: 3000K
CRI	: >80
Beam Angle	: N/A
Material	: Aluminum
Color	: Matt Anthracite (V322401S)
Paint method	: Outdoor UV Spray Powder
Adjustable	: -
IP	: 65
Driver Type	: Built-in Driver
Input Voltage	: 220-240V~ 50Hz
Power factor	: >0.96
Dimension (WxLxH)	: 150x150x750 mm.


OPTIONS GEOMETRIC

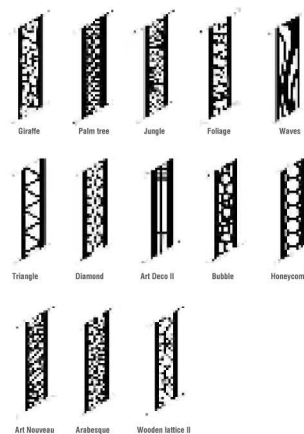



UNIT PRICE : 7,500.-



DIMENSION (Unit mm.)

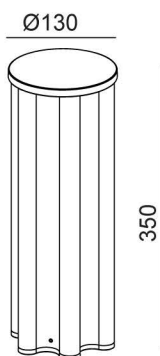

PHOTOMETRIC DATA



CREE

CHIP LED

6 × 2

WATT

IP65

DIE-CAST
ALUMINIUM
MATERIAL

ANTHRACITE
COLOR

CE

PLIE

BOLLARD LIGHT

SPECIFICATION

Model	: PLIE
Item No.	: 1550103
Light source	: LED Chip
Power	: 6×2W
Lumen	: 720 lm
Lumen/Watt	: 60 lm/W
CCT	: 3000K
CRI	: >80
Beam Angle	: 119°
Material	: Die-cast Aluminium
Color	: Anthracite
Paint method	: Outdoor UV Spray Powder
Optical cover	: Safety glass lens
Adjustable	: -
IP	: 65
Driver Type	: Built-in Driver
Input Voltage	: 220-240V ~ 50Hz
Power factor	: >0.96
Dimension (WxLxH)	: Ø130×350mm.

ACCESSORY



Hex Wrench



Plastic Plug



Screw



Rubber Stopper

+ Installation Manual

UNIT PRICE : 4,500.-



LC-WD-C758B

BOLLARD LIGHT

CREE

CHIP LED

10

WATT

IP65

DIE-CAST
ALUMINIUM
MATERIAL

ANTHRACITE
COLOR



CE



DIMENSION (Unit mm.)



PHOTOMETRIC DATA




SPECIFICATION

Model	: LC-WD-C758B
Light source	: LED Chip
Power	: 10W
Lumen	: 1000 lm
Lumen/Watt	: 100 lm/W
CCT	: 3000K
CRI	: >80
Beam Angle	: 360°
Material	: Die-cast Aluminium
Color	: Anthracite
Paint method	: Outdoor UV Spray Powder
Optical cover	: Safety glass lens
Adjustable	: -
IP	: 65
Driver Type	: Built-in Driver
Input Voltage	: 220-240V~ 50Hz
Power factor	: >0.96
Dimension (ØxH)	: Ø141 x H960mm.



UNIT PRICE : 5,800.-



DIMENSION (Unit mm.)

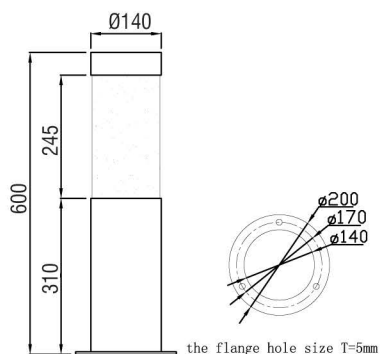

PHOTOMETRIC DATA



LC-WD-C124F

BOLLARD LIGHT

CREE

CHIP LED

7

WATT

IP65

DIE-CAST
ALUMINIUM
MATERIAL

ANTHRACITE
COLOR


SPECIFICATION

Model	: LC-WD-C124F
Light source	: LED Chip
Power	: 7W
Lumen	: 700 lm
Lumen/Watt	: 100 lm/W
CCT	: 3000K
CRI	: >80
Beam Angle	: 360°
Material	: Aluminum
Color	: Matt Anthracite (V322401S)
Paint method	: Outdoor UV Spray Powder
Diffuser	: PMMA frosty acrylic
Adjustable	: -
IP	: 65
Driver Type	: Built-in Driver
Input Voltage	: 200-240V~ 50Hz
Power factor	: >0.96
Dimension (ØxH)	: Ø140x600 mm.



UNIT PRICE : 7,000.-



DIMENSION (Unit mm.)

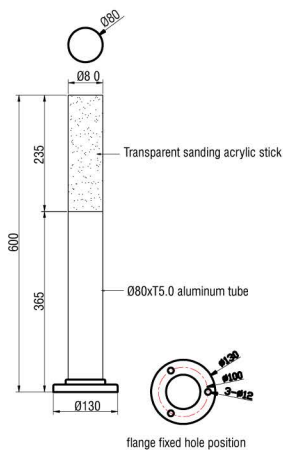

PHOTOMETRIC DATA



LC-WD-C474

BOLLARD LIGHT

CREE
CHIP LED

12
WATT

IP65

DIE-CAST
ALUMINIUM
MATERIAL

ANTHRACITE
COLOR

CE


SPECIFICATION

Model	: LC-WD-C474
Light source	: Cree LED
Power	: 12W
Lumen	: 1200 lm
Lumen/Watt	: 100 lm/W
CCT	: 3000K
CRI	: >80
Beam Angle	: 360°
Material	: Aluminum Thickness 3.0 mm. nuts 304 stainless steel.
Color	: Matt Anthracite (V322401S)
Paint method	: Outdoor UV Spray Powder
Diffuser	: Sanding acrylic stick
Adjustable	: -
IP	: 65
Driver Type	: Built-in Driver
Input Voltage	: 200-240V~50Hz
Power factor	: >0.96
Dimension (ØxH)	: Ø80×H600 mm.



UNIT PRICE : x,xxx.-



DIMENSION (Unit mm.)

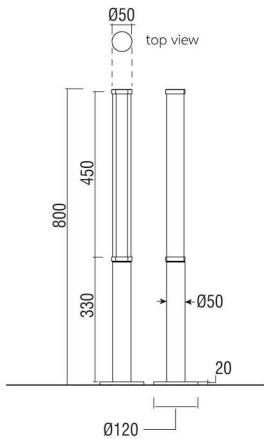

PHOTOMETRIC DATA



LC-YL-LIMB-2043

BOLLARD LIGHT

CREE

CHIP LED

12

WATT

IP65

DIE-CAST
ALUMINIUM
MATERIAL

Anthracite
Grey
RAL 7016

SPECIFICATION

Model	: LC-YL-LIMB-2043
Light source	: LED Chip
Power	: 12W
Lumen	: 1200 lm
Lumen/Watt	: 100 lm/W
CCT	: 3000K
CRI	: >80
Beam Angle	: 116°
Material	: Die-cast Aluminium
Color	: Anthracite Grey RAL 7016
Paint method	: Outdoor UV Spray Powder
Diffuser	: Opal PC Lens
Adjustable	: -
IP	: 65
Driver Type	: Built-in Driver
Input Voltage	: 200-240V~ 50Hz
Power factor	: >0.96
Dimension (ØxH)	: Body Ø50×H780 mm. Base Ø120 ×H20 mm.

ACCESSORY




Hex Wrench



UNIT PRICE : 6,500.-



DIMENSION (Unit mm.)



PHOTOMETRIC DATA



CREE
CHIP LED

7
WATT

IP65

DIE-CAST
ALUMINIUM
MATERIAL

ANTHRACITE
COLOR

CE

ELFO BOLLARD LIGHT

SPECIFICATION

Model	: ELFO
Item No.	: 5853COB-400
Light source	: LED Chip
Power	: 7W
Lumen	: 700 lm
Lumen/Watt	: 100 lm/W
CCT	: 3000K
CRI	: >80
Beam Angle	: 50°
Material	: Die-cast Aluminium
Color	: Anthracite
Paint method	: Outdoor UV Spray Powder
Optical cover	: Safety glass lens
Adjustable	: -
IP	: 65
Driver Type	: Driver On Board
Input Voltage	: 220-240V~ 50Hz
Power factor	: >0.96
Dimension (WxLxH)	: 100x50x400 mm.

ACCESSORY



+ Installation Manual



UNIT PRICE : 5,000.-



DIMENSION (Unit mm.)



PHOTOMETRIC DATA



bridgelux
CHIP LED

12
WATT

IP65

ALUMINIUM
MATERIAL

MATT
BLACK
COLOR

LC-WD-HH3207 BOLLARD LIGHT

SPECIFICATION


Model	: LC-WD-HH3207
Light source	: LED Bridgelux
Power	: 12W
Lumen	: 1260 lm
Lumen/Watt	: 105 lm/W
CCT	: 4000K
CRI	: >80
Beam Angle	: 120°
Material	: Aluminum
Color	: Matt Black
Paint method	: Outdoor UV Spray Powder
Optical cover	: Safety glass lens
Adjustable	: No
IP	: 65
Driver Type	: Built-in Driver
Input Voltage	: 200-240V~50Hz
Power factor	: >0.96
Dimension (ØxH)	: Ø108×H600 mm.





UNIT PRICE : x,xxx.-



DIMENSION (Unit mm.)

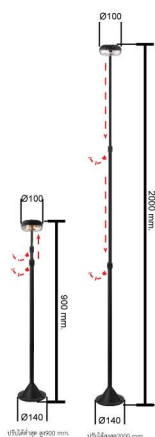

PHOTOMETRIC DATA



CREE

CHIP LED

6

WATT

IP65

DIE-CAST
ALUMINIUM
MATERIAL

ANTHRACITE
COLOR

CE

FLUX

BOLLARD LIGHT



SPECIFICATION

Model	:	FLUX
Item No.	:	1510103-LED
Light source	:	LED Chip
Power	:	6W
Lumen	:	600 lm
Lumen/Watt	:	100 lm/W
CCT	:	3000K
CRI	:	>80
Beam Angle	:	35°
Material	:	Die-cast Aluminium
Color	:	Anthracite
Paint method	:	Outdoor UV Spray Powder
Diffuser	:	Clear pc
Adjustable	:	-
IP	:	65
Driver Type	:	External Driver
Input Voltage	:	220-240V~ 50Hz
Power factor	:	>0.96
Dimension (ØxH)	:	Ø100x900~2000 mm.

ACCESSORY



Washers



Nuts



Acorn Nuts



Nuts



J Bolts


+ Installation Manual

UNIT PRICE : 6,600.-

**NEW
PRODUCT**



DIMENSION (Unit mm.)

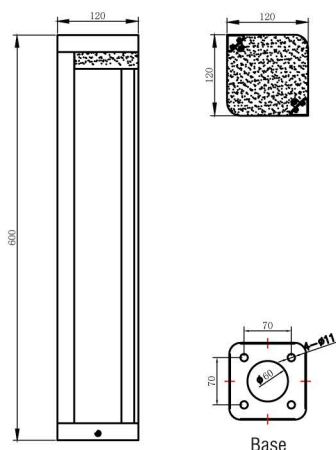

ACCESSORY



Hex Wrench

LC-WD-C-HH3044

BOLLARD LIGHT

LED
CHIP

10
WATT

IP65

ALUMINUM
ALLOY
MATERIAL

VANKE
GREY
COLOR



SPECIFICATION


Model	:	LC-WD-C-HH3044
Light source	:	LED Chip
Power	:	10W
Lumen	:	1000 lm
Lumen/Watt	:	100 lm/W
CCT	:	3000K
CRI	:	>80
Beam Angle	:	Symmetrical
Material	:	Aluminium Alloy
Color	:	Vanke Grey
Paint method	:	Outdoor UV Spray Powder
Diffuser	:	-
Adjustable	:	No
IP	:	65
Driver Type	:	Built-in Driver
Input Voltage	:	220-240V~ 50Hz
Power factor	:	>0.96
Dimension (W×L×H)	:	120 × 120 × 600 mm.

UNIT PRICE : 4,000.-

**NEW
PRODUCT**



DIMENSION (Unit mm.)

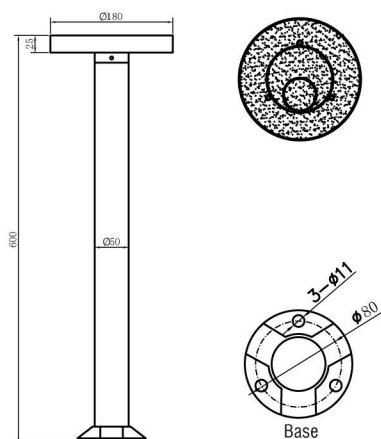

ACCESSORY



Hex Wrench

LC-WD-C-HH3045

BOLLARD LIGHT

LED
CHIP

10
WATT

IP65

ALUMINUM
ALLOY
MATERIAL

VANKE
GREY
COLOR



SPECIFICATION


Model	:	LC-WD-C-HH3045
Light source	:	LED Chip
Power	:	10W
Lumen	:	1000 lm
Lumen/Watt	:	100 lm/W
CCT	:	3000K
CRI	:	>80
Beam Angle	:	Symmetrical
Material	:	Aluminium Alloy
Color	:	Vanke Grey
Paint method	:	Outdoor UV Spray Powder
Diffuser	:	-
Adjustable	:	No
IP	:	65
Driver Type	:	Built-in Driver
Input Voltage	:	220-240V~ 50Hz
Power factor	:	>0.96
Dimension (Ø×H)	:	Ø180×600 mm.

UNIT PRICE : 4,500.-

**NEW
PRODUCT**



DIMENSION (Unit mm.)

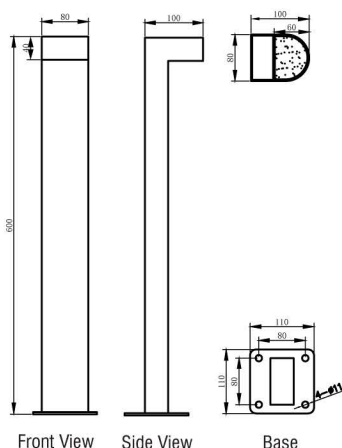

ACCESSORY



Hex Wrench

LC-WD-C-HH3090

BOLLARD LIGHT

LED
CHIP

10
WATT

IP65

ALUMINUM
ALLOY
MATERIAL

VANKE
GREY
COLOR



SPECIFICATION


Model	: LC-WD-C-HH3090
Light source	: LED Chip
Power	: 10W
Lumen	: 1000 lm
Lumen/Watt	: 100 lm/W
CCT	: 3000K
CRI	: > 80
Beam Angle	: Symmetrical
Material	: Aluminium Alloy
Color	: Vanke Grey
Paint method	: Outdoor UV Spray Powder
Diffuser	: -
Adjustable	: No
IP	: 65
Driver Type	: Built-in Driver
Input Voltage	: 220-240V~ 50Hz
Power factor	: >0.96
Dimension (W×L×H)	: 100 × 80 × 600 mm.

UNIT PRICE : 4,500.-

**NEW
PRODUCT**



DIMENSION (Unit mm.)

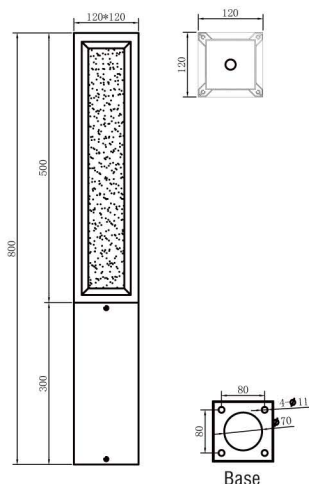

ACCESSORY



Hex Wrench

LC-WD-C-HH3101

BOLLARD LIGHT

LED
CHIP

10
WATT

IP65

ALUMINUM
ALLOY
MATERIAL

VANKE
GREY
COLOR



SPECIFICATION


Model	: LC-WD-C-HH3101
Light source	: LED Chip
Power	: 10W
Lumen	: 1000 lm
Lumen/Watt	: 100 lm/W
CCT	: 3000K
CRI	: >80
Beam Angle	: Symmetrical
Material	: Aluminium Alloy
Color	: Vanke Grey
Paint method	: Outdoor UV Spray Powder
Diffuser	: PMMA
Adjustable	: No
IP	: 54
Driver Type	: Built-in Driver
Input Voltage	: 220-240V~ 50Hz
Power factor	: >0.96
Dimension (W×L×H)	: 120 × 120 × 800 mm.

UNIT PRICE : 7,500.-

**NEW
PRODUCT**



DIMENSION (Unit mm.)

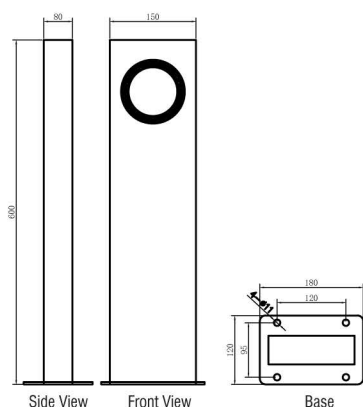

ACCESSORY



Hex Wrench

LC-WD-C-HH3196

BOLLARD LIGHT

LED
CHIP

10
WATT

IP65

ALUMINUM
ALLOY
MATERIAL

VANKE
GREY
COLOR

SPECIFICATION

Model	: LC-WD-C-HH3196
Light source	: LED Chip
Power	: 10W
Lumen	: 1000 lm
Lumen/Watt	: 100 lm/W
CCT	: 3000K
CRI	: >80
Beam Angle	: Symmetrical
Material	: Aluminium Alloy
Color	: Vanke Grey
Paint method	: Outdoor UV Spray Powder
Diffuser	: PMMA
Adjustable	: No
IP	: 54
Driver Type	: Built-in Driver
Input Voltage	: 220-240V~ 50Hz
Power factor	: >0.96
Dimension (W×L×H)	: 150 × 80 × 600 mm.

UNIT PRICE : 6,000.-

**NEW
PRODUCT**



LC-YB-SOP0075-02B-010

BOLLARD LIGHT

LED
CHIP


10
WATT

IP65

ALUMINIUM
+ GLASS
MATERIAL

BLACK
COLOR

DIMENSION (Unit mm.)

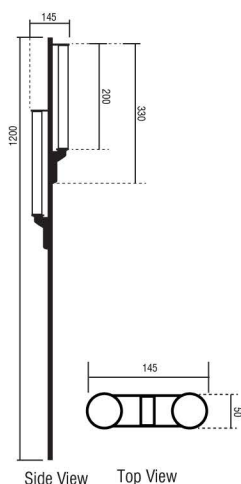

ACCESSORY



IPV-24-35W

+ Installation Manual

SPECIFICATION


Model	: LC-YB-SOP0075-02B-010
Light source	: LED
Power	: 10W
Lumen	: 1000 lm
Lumen/Watt	: 100 lm/W
CCT	: 3000K
CRI	: 90
Beam Angle	: 180°
Material	: Aluminium Polycarbonate, glass
Color	: Black
Paint method	: Outdoor UV Spray Powder
Diffuser	: Glass
Adjustable	: Fixed
IP	: 65
Driver Type	: Remote Driver
Input Voltage	: 24Vdc
Dimension (WxLxH)	: 50×145×1200 mm.

UNIT PRICE : 8,500.-

**NEW
PRODUCT**



DIMENSION (Unit mm.)

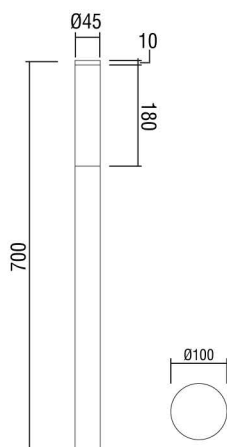

ACCESSORY



IPV-24-35W

+ Installation Manual

LC- YB-SOP0075-02C-005

BOLLARD LIGHT

LED
CHIP

5
WATT

IP65

ALUMINIUM
+ GLASS
MATERIAL

GRAY
COLOR

SPECIFICATION


Model	: LC-YB-SOP0075-02C-005
Light source	: LED
Power	: 5W
Lumen	: 500 lm
Lumen/Watt	: 100 lm/W
CCT	: 3000K
CRI	: 90
Beam Angle	: 180°
Material	: Aluminum + Glass
Color	: Gray
Paint method	: Outdoor UV Spray Powder
Diffuser	: Glass
Adjustable	: Fixed
IP	: 65
Driver Type	: Remote Driver
Input Voltage	: 24Vdc
Dimension (ØxH)	: Ø45×H700 mm.

UNIT PRICE : 6,500.-

**NEW
PRODUCT**



DIMENSION (Unit mm.)

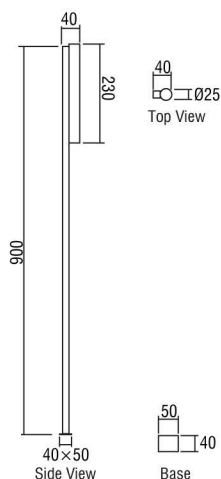

ACCESSORY



IPV-24-35W

+ Installation Manual

LC-YB-SOP0076-02A-003

BOLLARD LIGHT

**LED
CHIP**

**5
WATT**

IP65

**ALUMINIUM
MATERIAL**

**BLACK
AND GOLD
COLORS**

SPECIFICATION


Model	: LC-YB-SOP0076-02A-003
Light source	: LED
Power	: 5W
Lumen	: 500 lm
Lumen/Watt	: 100 lm/W
CCT	: 3000K
CRI	: 90
Beam Angle	: 180°
Material	: Aluminum
Color	: Black and gold
Paint method	: Outdoor UV Spray Powder
Optical cover	: Safety Glass lens
Adjustable	: Fixed
IP	: 65
Driver Type	: Remote Driver
Input Voltage	: 24Vdc
Dimension (ØxLxH)	: Ø25×40×900 mm.

UNIT PRICE : 7,000.-

**NEW
PRODUCT**



DIMENSION (Unit mm.)



ACCESSORY



IPV-24-35W

+ Installation Manual

LC-YB-SOP0082-01B-005

BOLLARD LIGHT

**LED
CHIP**

**5
WATT**

IP65

**ALUMINIUM
+ GLASS
MATERIAL**

**MATT
NICKEL
COLOR**

**MATT
SILVER
COLOR**

SPECIFICATION


Model	: LC-YB-SOP0075-02B-010
Light source	: LED
Power	: 5W
Lumen	: 500 lm
Lumen/Watt	: 100 lm/W
CCT	: 3000K
CRI	: 90
Beam Angle	: Floodlight
Material	: Aluminum + Glass
Color	: Matt Nickel + Matt Silver
Paint method	: Outdoor UV Spray Powder
Diffuser	: Glass
Adjustable	: Fixed
IP	: 65
Driver Type	: Remote Driver
Input Voltage	: 24Vdc
Dimension (ØxH)	: Ø70×700 mm.

UNIT PRICE : 6,500.-

**NEW
PRODUCT**



DIMENSION (Unit mm.)

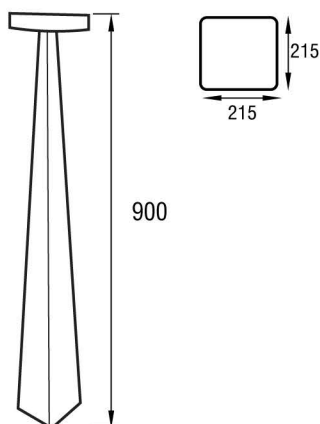

ACCESSORY



Hex Wrench

LC-WD-ONK-BY-02

BOLLARD LIGHT

LED
CHIP

12
WATT

IP65

ALUMINIUM
MATERIAL

WHITE
COLOR

SPECIFICATION


Model	: LC-WD-ONK-BY-02
Light source	: LED
Power	: 12W
Lumen	: 1200 lm
Lumen/Watt	: 100 lm/W
CCT	: 3000K
CRI	: ≥ 80
Beam Angle	: Symmetrical medium
Material	: Aluminium
Color	: White
Paint method	: -
Diffuser	: Frosted PMMA
Adjustable	: No
IP	: 65
Driver Type	: Remote Driver
Input Voltage	: 24VDC
Power Factor	: 0.96
Dimension (DxH)	: 215x900 mm.

UNIT PRICE : xxxx.-

**NEW
PRODUCT**



DIMENSION (Unit mm.)



LC-WD-C688

BOLLARD LIGHT

**LED
CHIP**

**9
WATT**

IP65

**ALUMINIUM
MATERIAL**

**BLACK
AND GOLD
COLORS**



SPECIFICATION


Model	: LC-WD-C688
Light source	: LED
Power	: 9W
Lumen	: 900 lm
Lumen/Watt	: 100 lm/W
CCT	: 2200K
CRI	: 90
Beam Angle	: Symmetrical medium
Material	: Aluminum/ Stainless304
Color	: RAL7032 COLOR
Paint method	: -
Diffuser	: Polycarbonate
Adjustable	: No
IP	: 65
Driver Type	: Built-in Driver
Input Voltage	: AC220-50Hz
Power Factor	: 0.96
Dimension (H)	: 1000 mm.

UNIT PRICE : xxxx.-


**NEW
PRODUCT**



DIMENSION (Unit mm.)

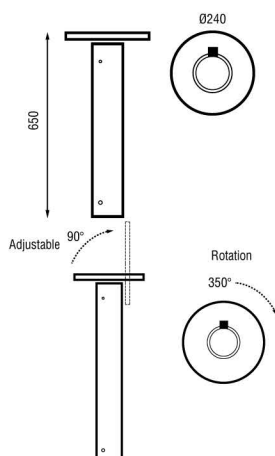

PHOTOMETRIC DATA



LC-H3483-650

BOLLARD LIGHT

LUMILEDS
LED

9.4
WATT

IP65


DIE-CAST
ALUMINIUM
MATERIAL

ANTHRACITE
COLOR

SPECIFICATION

Model	: LC-H3483-650
Light source	: LED
Power	: 9.4W
Lumen	: 650 lm
Lumen/Watt	: 69 lm/W
CCT	: 3000K
CRI	: ≥ 80
Beam Angle	: 108°
Material	: Die-cast Aluminium
Color	: Anthracite
Paint method	: Powder coating Polyester
Diffuser	: Frost polycarbonate
Adjustable	: Yes
IP	: 65
Driver Type	: Built-in Driver
Input Voltage	: 220-240Vac~50Hz
Power Factor	: 0.96
Dimension (ØxH)	: 240x650 mm.

ACCESSORY




+ Installation Manual

UNIT PRICE : xxxx.-



**NEW
PRODUCT**



DIMENSION (Unit mm.)

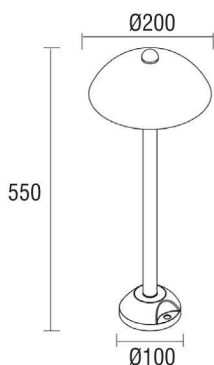

PHOTOMETRIC DATA



LC-WD-MB23-0203

BOLLARD LIGHT

LED
CHIP

7
WATT

IP65

ALUMINIUM
MATERIAL

BLACK
COLOR

SPECIFICATION


Model	: LC-WD-MB23-0203
Light source	: LED
Power	: 7W
Lumen	: 700 lm
Lumen/Watt	: 100 lm/W
CCT	: 3000K
CRI	: >80
Beam Angle	: Symmetrical
Material	: Aluminium
Color	: Black
Paint method	: Outdoor UV Spray Powder
Adjustable	: No
IP	: 65
Driver Type	: Built-in LED Driver
Input Voltage	: 220-240Vac ~ 50/60Hz
Power factor	: >0.96
Dimension (ØxH)	: 200 x 550 mm.

UNIT PRICE : xxxx.-

**NEW
PRODUCT**



DIMENSION (Unit mm.)



ACCESSORY



Solar Panel



Ground Spike



LED Constant Voltage
Driver 24Vdc

+ Installation Manual

LC-YB-MOP0014-01A-007

BOLLARD LIGHT

**LED
CHIP**

**7
WATT**

IP65


**CEMENT
+
STAINLESS STEEL
MATERIAL**

**GRAY
COLOR**


SPECIFICATION

Model	: LC-YB-MOP0014-01A-007
Light source	: LED
Power	: 7W
Lumen	: 700 lm
Lumen/Watt	: 100 lm/W
CCT	: 3000K
CRI	: 90
Beam Angle	: 180°
Material	: Cement + Stainless Steel
Color	: Gray
Paint method	: -
Diffuser	: PMMA
Adjustable	: Fixed
IP	: 65
Driver Type	: Remote Driver
Input Voltage	: 24Vdc
Dimension (ØxH)	: Ø100 x 655 mm.

SOLAR PANELS + LAMP

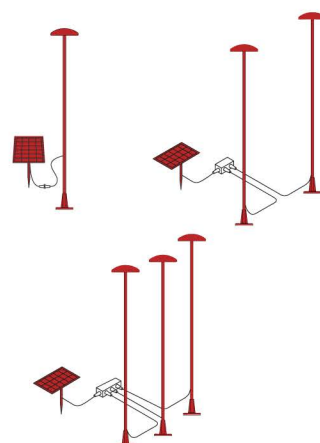

DRIVERS + LAMPS




UNIT PRICE : xxxx.-

**NEW
PRODUCT**



DIMENSION (Unit mm.)



ACCESSORY



Solar Panel



Ground Spike



LED Constant Voltage
Driver 24Vdc

+ Installation Manual

LC-YB-SOP0092-02B

BOLLARD LIGHT

**LED
CHIP**

**5
WATT**

IP65

**ALUMINUM
+
PMMA
MATERIAL**


**MATT GREEN
COLOR**

**MATT NICKEL
COLOR**


SPECIFICATION

Model	: LC-YB-SOP0092-02B
Light source	: LED
Power	: 5W
Lumen	: 500 lm
Lumen/Watt	: 100 lm/W
CCT	: 3000K
CRI	: 90
Beam Angle	: 180°
Material	: Aluminum + PMMA
Color	: Matt Green + Matt Nickel
Paint method	: -
Diffuser	: PMMA
Adjustable	: Fixed
IP	: 65
Driver Type	: Remote Driver
Input Voltage	: 24Vdc
Dimension (ØxH)	: Ø80 x 720 mm.

SOLAR PANELS + LAMP

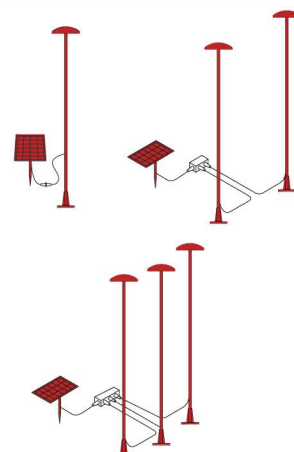

DRIVERS + LAMPS




UNIT PRICE : xxxx.-

**NEW
PRODUCT**



DIMENSION (Unit mm.)



ACCESSORY



Solar Panel



Ground Spike



LED Constant Voltage
Driver 24Vdc

+ Installation Manual

**LED
CHIP**

**2
WATT**

IP65

**ALUMINUM
+
ACRYLIC
MATERIAL**

**GOLD
COLOR**

**BLACK
COLOR**

LC-YB-MOP0008-01A

BOLLARD LIGHT

SPECIFICATION

Model : LC-YB-MOP0008-01A

Light source : LED

Power : 2W

Lumen : 200 lm

Lumen/Watt : 100 lm/W

CCT : 3000K

CRI : 90

Beam Angle : 180°

Material : Aluminum + Acrylic

Color : Black rod + Gold body
+ Frosted Acrylic

Paint method : -

Optical Cover : Frosted Acrylic

Adjustable : Fixed


IP : 65

Driver Type : Remote Driver


Input Voltage : 24Vdc

Dimension (ØxH) : Ø40 x 845 mm.

SOLAR PANELS + LAMP

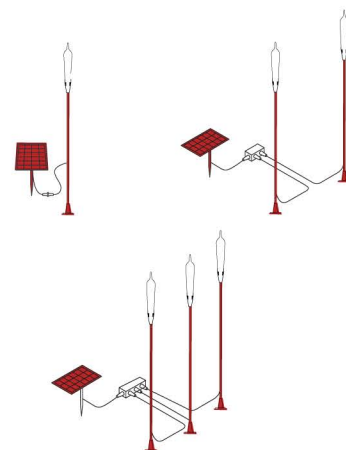

DRIVERS + LAMPS




UNIT PRICE : xxxx.-

**NEW
PRODUCT**



DIMENSION (Unit mm.)

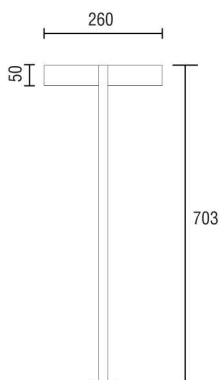

ACCESSORY



LED Constant Voltage
Driver 24Vdc

+ Installation Manual

LC-YB-SOP0105-01D

BOLLARD LIGHT

LED
CHIP

10
WATT

IP65

ALUMINUM
+
ACRYLIC
MATERIAL


SAND GRAY
COLOR



SPECIFICATION

Model	: LC-YB-SOP0105-01D
Light source	: LED
Power	: 10W
Lumen	: 1000 lm
Lumen/Watt	: 100 lm/W
CCT	: 3000K
CRI	: 90
Beam Angle	: 120°
Material	: Aluminum + Acrylic
Color	: Sand Gray
Paint method	: -
Diffuser	: Acrylic
Adjustable	: Yes
IP	: 65
Driver Type	: Remote Driver
Input Voltage	: 24Vdc
Dimension (LxWxH)	: 260 x 50 x 703 mm.

DRIVERS + LAMPS




UNIT PRICE : xxxx.-


**NEW
PRODUCT**



DIMENSION (Unit mm.)

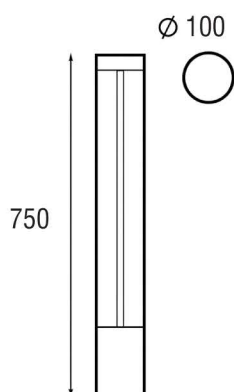

PHOTOMETRIC DATA

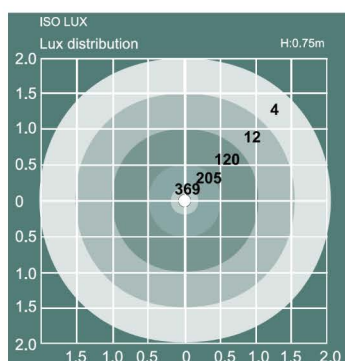

LUMILEDS

CHIP LED

10

WATT

IP65

DIE-CAST
ALUMINIUM
MATERIAL

ANTHRACITE
COLOR

LC-H3491
BOLLARD LIGHT

SPECIFICATION


Model	: LC-H3491
Light source	: Lumileds 4014 LED Chip
Power	: 10W
Lumen	: 1123 lm
Lumen/Watt	: 112 lm/W
CCT	: 3000K
CRI	: >80
Beam Angle	: 101°
Material	: Die-cast Aluminium
Color	: Anthracite
Paint method	: Polyester powder coating
Optical cover	: Clear PMMA
Adjustable	: -
IP	: 65
Driver Type	: Built-in Driver
Input Voltage	: 220-240V~ 50Hz
Power factor	: >0.96
Dimension (ØxH)	: Ø100 x H750mm.

UNIT PRICE : X,XXX.-


**NEW
PRODUCT**



DIMENSION (Unit mm.)

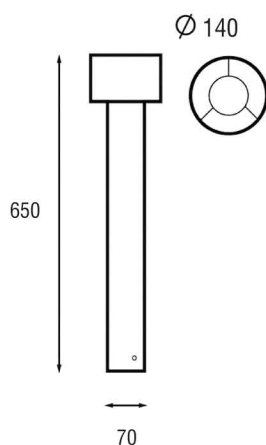

PHOTOMETRIC DATA

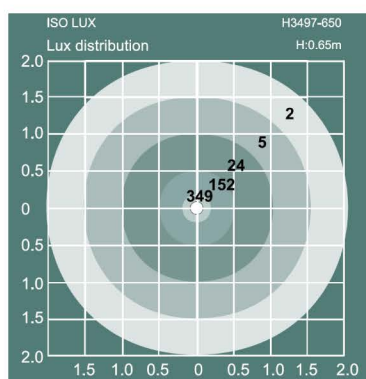

LC-H3497-650

BOLLARD LIGHT

LUMILEDS

LED

8

WATT

IP65

DIE-CAST
ALUMINIUM
MATERIAL

ANTHRACITE
COLOR



SPECIFICATION

Model	: LC-H3497-650
Light source	: LED Lumiled 4014
Power	: 8W
Lumen	: 570 lm
Lumen/Watt	: 71 lm/W
CCT	: 3000K
CRI	: ≥ 80
Beam Angle	: 96°
Material	: Die-cast Aluminium
Color	: Anthracite/Gold
Paint method	: Polyester powder coating
Diffuser	: Clear polycarbonate
Adjustable	: No
IP	: 65
Driver Type	: Built-in Driver
Input Voltage	: 220-240Vac~50Hz
Power Factor	: 0.9
Dimension (ØxH)	: 140x650 mm.

ACCESSORY



J Bolts



Hex Wrench



Acorn Nuts




Washers

UNIT PRICE : X,XXX.-

**NEW
PRODUCT**



DIMENSION (Unit mm.)

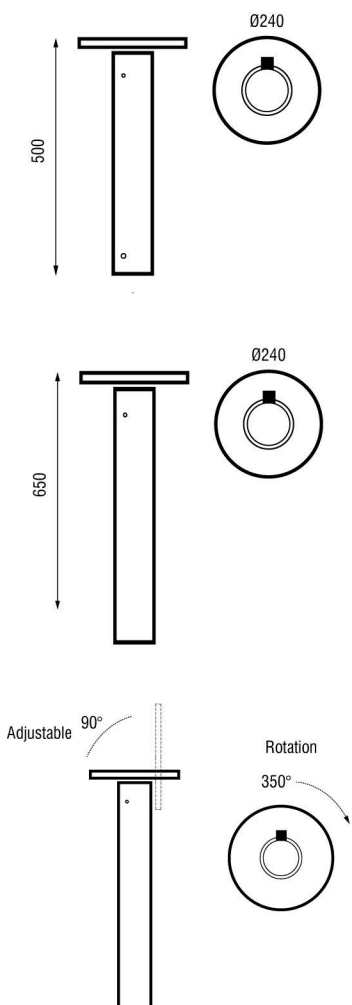

LUMILEDS
LED

9.4
WATT

IP65

DIE-CAST
ALUMINIUM
MATERIAL

ANTHRACITE
COLOR


LC-H3483-500/650

BOLLARD LIGHT


SPECIFICATION

Model	: LC-H3483-500/650
Light source	: LED Lumiled 4014
Power	: 9.4W
Lumen	: 650 lm
Lumen/Watt	: 69 lm/W
CCT	: 3000K
CRI	: ≥ 80
Beam Angle	: 108°
Material	: Die-cast Aluminium
Color	: Anthracite
Paint method	: Polyester powder coating
Diffuser	: Frost polycarbonate
Adjustable	: Yes
IP	: 65
Driver Type	: Built-in Driver
Input Voltage	: 220-240Vac~50Hz
Power Factor	: 0.9
Dimension (ØxH)	: 240x500 mm./240x650 mm.

ACCESSORY



PHOTOMETRIC DATA





UNIT PRICE : X,XXX.-

**NEW
PRODUCT**



DIMENSION (Unit mm.)

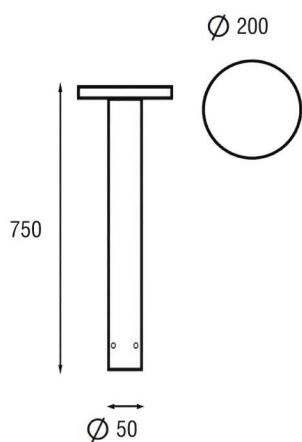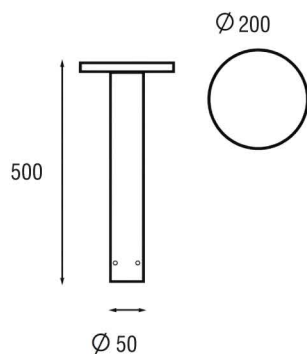

LC-H3515-500/750

BOLLARD LIGHT

**LUMILEDS
LED**

**9
WATT**

IP65

**DIE-CAST
ALUMINIUM
MATERIAL**

**ANTHRACITE
COLOR**

SPECIFICATION

Model	: LC-H3515-500/750
Light source	: LED Lumiled 4014
Power	: 8W
Lumen	: 780 lm
Lumen/Watt	: 86 lm/W
CCT	: 3000K
CRI	: ≥ 80
Beam Angle	: 127°
Material	: Die-cast Aluminium
Color	: Anthracite
Paint method	: Polyester powder coating
Diffuser	: Frost Polycarbonate
Adjustable	: No
IP	: 65
Driver Type	: Built-in Driver
Input Voltage	: 220-240Vac~50Hz
Power Factor	: 0.9
Dimension (ØxH)	: 200x500 mm./200x750 mm.

ACCESSORY



J Bolts



Hex Wrench




Acorn Nuts



Washers

PHOTOMETRIC DATA



UNIT PRICE : X,XXX.-

NEW
PRODUCT

LC-H5735-200/500

BOLLARD LIGHT

LUMILEDS
LED

10
WATT



IP65

DIE-CAST
ALUMINIUM
MATERIAL

ANTHRACITE
COLOR



DIMENSION (Unit mm.)

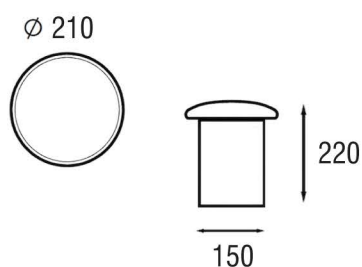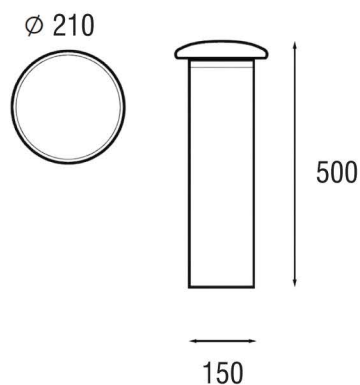

SPECIFICATION

Model	: LC-H5735-220/500
Light source	: LED Lumiled 4014
Power	: 10W
Lumen	: 850 lm
Lumen/Watt	: 85 lm/W
CCT	: 3000K
CRI	: ≥ 80
Beam Angle	: 184°
Material	: Die-cast Aluminium
Color	: Anthracite
Paint method	: Polyester powder coating
Diffuser	: Frost Polycarbonate
Adjustable	: No
IP	: 65
Driver Type	: Built-in Driver
Input Voltage	: 220-240Vac~50Hz
Power Factor	: 0.9
Dimension (ØxH)	: 210x220 mm./210x500 mm.

ACCESSORY



J Bolts



Hex Wrench




Acorn Nuts




Washers

PHOTOMETRIC DATA




UNIT PRICE : X,XXX.-

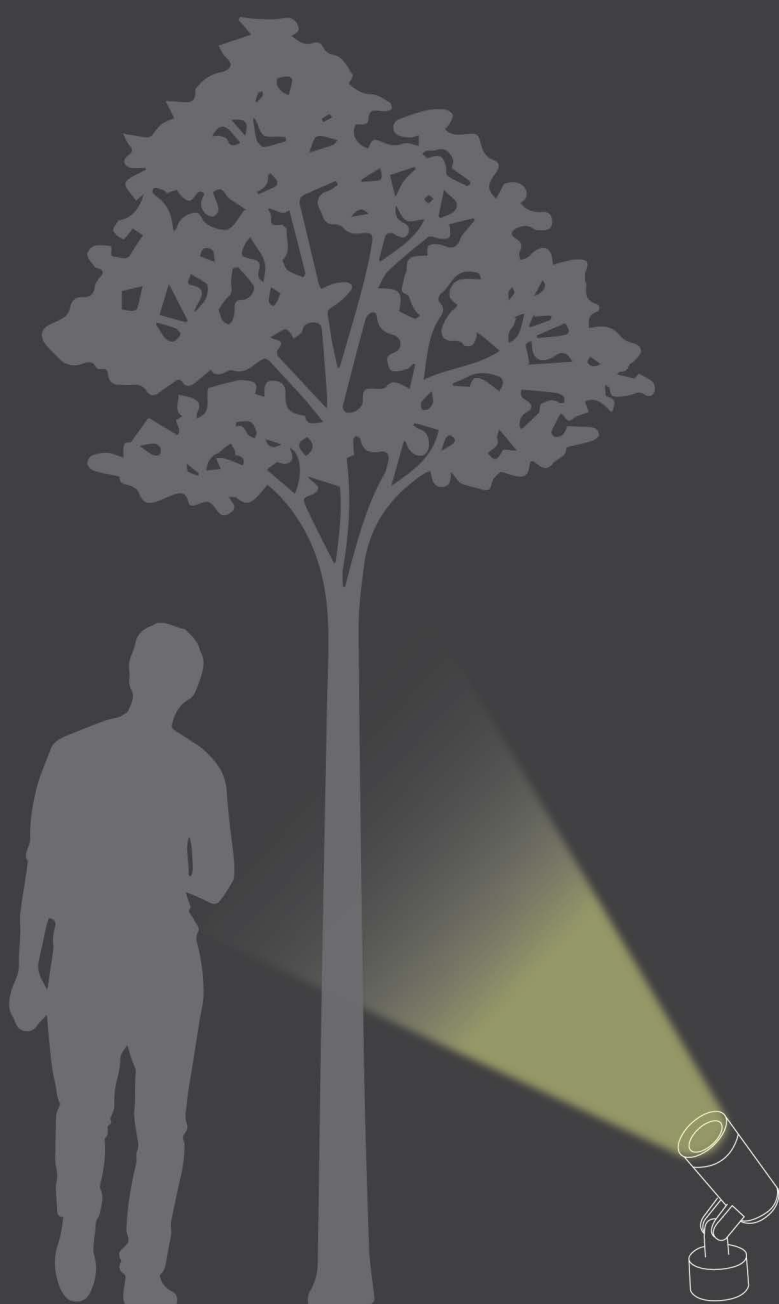



FLOODLIGHT



DIMENSION (Unit mm.)



PHOTOMETRIC DATA



CREE

CHIP LED

8

WATT

IP65

DIE-CAST
ALUMINIUM
MATERIAL

ANTHRACITE
COLOR

CE

SPECIFICATION

Model	: CUBIC MINI
Item No.	: LC-2741-03
Light source	: LED Chip
Power	: 8W
Lumen	: 800 lm
Lumen/Watt	: 100 lm/W
CCT	: 3000K
CRI	: >80
Beam Angle	: 27°
Material	: Die-cast Aluminium
Color	: Anthracite
Paint method	: Outdoor UV Spray Powder
Optical cover	: Safety glass lens
Adjustable	: Yes
IP	: 65
Driver Type	: Built-in Driver
Input Voltage	: 220-240V~ 50Hz
Power factor	: >0.96
Dimension (WxLxH)	: 70x80x120 mm.

ACCESSORY



Cable Gland



Hex Wrench



Plastic Plug



Optional
Tree Strap
(for small base)



Plastic spike
included



Screw


+ Installation Manual

CUBIC MINI FLOODLIGHT



UNIT PRICE : 3,700.-



DIMENSION (Unit mm.)

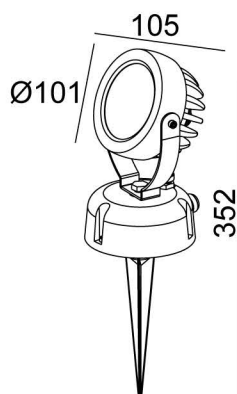

PHOTOMETRIC DATA



CREE

CHIP LED

6

WATT

IP65

DIE-CAST
ALUMINIUM
MATERIAL

ANTHRACITE
COLOR

CE

2591-LED FLOODLIGHT

SPECIFICATION

Item No.	: 2591-LED
Light source	: LED Chip
Power	: 6W
Lumen	: 600 lm
Lumen/Watt	: 100 lm/W
CCT	: 3000K
CRI	: >80
Beam Angle	: 25°
Material	: Die-cast Aluminium
Color	: Anthracite
Paint method	: Outdoor UV Spray Powder
Optical cover	: Safety glass lens
Adjustable	: Yes
IP	: 65
Driver Type	: Built-in Driver
Input Voltage	: 220-240V ~ 50Hz
Power factor	: >0.96
Dimension (ØxLxH)	: Ø101x105x352 mm.

ACCESSORY



Cable Gland



Hex Wrench



Plastic Plug



Optional
Tree Strap
(for small base)



Plastic spike
included




Screw

+ Installation Manual



UNIT PRICE : x,xxx.-



DIMENSION (Unit mm.)



PHOTOMETRIC DATA



LC-WD-MB23-0611 FLOODLIGHT

CREE
CHIP LED

8
WATT

IP65

**DIE-CAST
ALUMINIUM
MATERIAL**

**DARK GREY
COLOR**

ECO

SPECIFICATION

Model	: LC-WD-MB23-0611
Light source	: LED Chip
Power	: 8W
Lumen	: 800 lm
Lumen/Watt	: 100 lm/W
CCT	: 3000K
CRI	: >80
Beam Angle	: 36°
Material	: Die-cast Aluminium
Color	: Dark Grey
Paint method	: Outdoor UV Spray Powder
Optical cover	: Safety glass lens
Adjustable	: Yes
IP	: 65
Driver Type	: Built-in LED Driver
Input Voltage	: 200-240V~ 50Hz
Power factor	: >0.96
Dimension (WxLxH)	: 65x95x105 mm.

ACCESSORY



Plastic spike
included



Hex Wrench




Tree Strap
(for small base)




UNIT PRICE : 2,200.-



DIMENSION (Unit mm.)



PHOTOMETRIC DATA

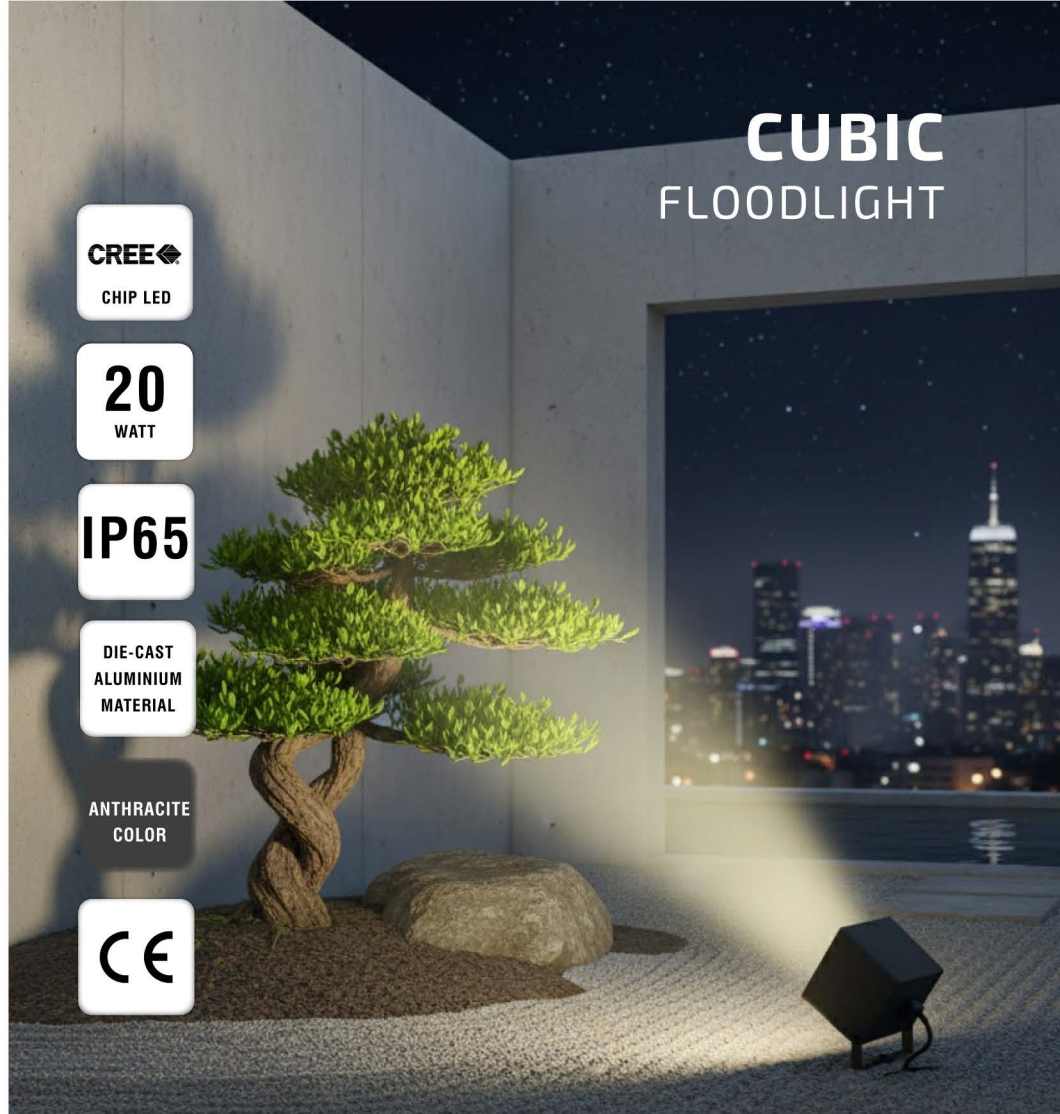

CUBIC FLOODLIGHT

CREE

CHIP LED

20

WATT

IP65

DIE-CAST
ALUMINIUM
MATERIAL

ANTHRACITE
COLOR

CE

SPECIFICATION

Model	: CUBIC
Item No.	: 2250103
Light source	: LED Chip
Power	: 20W
Lumen	: 2000 lm
Lumen/Watt	: 100 lm/W
CCT	: 3000K
CRI	: >80
Beam Angle	: 32°
Material	: Die-cast Aluminium
Color	: Anthracite
Paint method	: Outdoor UV Spray Powder
Optical cover	: Safety glass lens
Adjustable	: Yes
IP	: 65
Driver Type	: Driver on Board
Input Voltage	: 220-240V~ 50Hz
Power factor	: >0.96
Dimension (WxLxH)	: 95x106x143mm.

ACCESSORY



Cable Gland



Hex Wrench



Plastic Plug



Optional
Tree Strap
(for small base)



Plastic spike
included



Screw


+ Installation Manual

UNIT PRICE : 6,200.-


SMALLEST
LED
FLOOD



DIMENSION (Unit mm.)

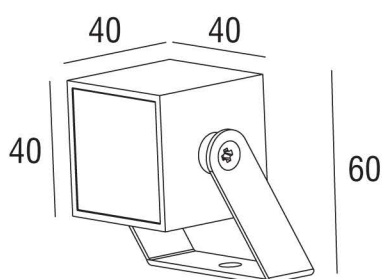

PHOTOMETRIC DATA

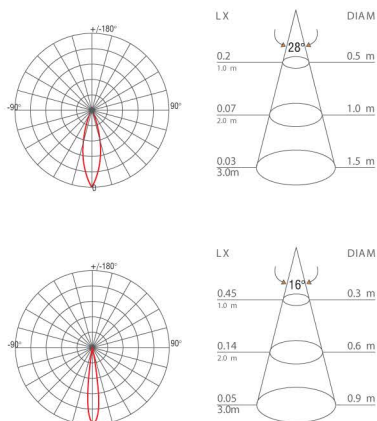

CREE

CHIP LED

1

WATT

IP65

DIE-CAST
ALUMINIUM
MATERIAL

ANTHRACITE
COLOR

CE

CUBIC MICRO FLOODLIGHT

SPECIFICATION

Model	:	CUBIC MICRO
Item No.	:	22503
Light source	:	LED Chip
Power	:	1W
Lumen	:	100 lm
Lumen/Watt	:	100 lm/W
CCT	:	3000K
CRI	:	>80
Beam Angle	:	28°, 16°
Material	:	Die-cast Aluminium
Color	:	Anthracite
Paint method	:	Outdoor UV Spray Powder
Optical cover	:	Safety glass lens
Adjustable	:	Yes
IP	:	65
Driver Type	:	External Driver
Input Voltage	:	12V / 24V
Power factor	:	>0.96
Dimension (WxLxH)	:	40x40x60mm.


ACCESSORY



Screw



Plastic Plug




Washers



UNIT PRICE : 2,600.-



DIMENSION (Unit mm.)

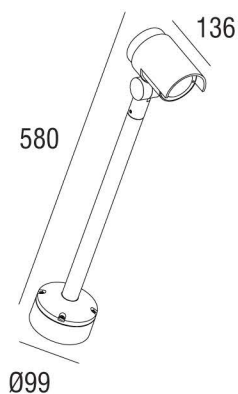

PHOTOMETRIC DATA



PIXIE WALL-LONG FLOODLIGHT

CREE
CHIP LED

10
WATT

IP65

DIE-CAST
ALUMINIUM
MATERIAL

ANTHRACITE
COLOR

CE

SPECIFICATION

Model	: PIXIE WALL - LONG
Item No.	: H167403
Light source	: LED Chip
Power	: 10W
Lumen	: 1200 lm
Lumen/Watt	: 120 lm/W
CCT	: 3000K
CRI	: >80
Beam Angle	: 41°
Material	: Die-cast Aluminium
Color	: Anthracite
Paint method	: UV Powder coating
Optical cover	: Safety glass lens
Adjustable	: Yes (Adjust up to 70°)
IP	: 65
Driver Type	: Driver on Board
Input Voltage	: 220-240V~ 50Hz
Power factor	: >0.96
Dimension (ØxLxH)	: Ø99x136x580 mm.

ACCESSORY



Hex Wrench



Plastic Plug



Rubber Stopper



Screw



Optional
Tree Strap
(for small base)




Plastic spike
included

+ Installation Manual



UNIT PRICE : 5,500.-



DIMENSION (Unit mm.)

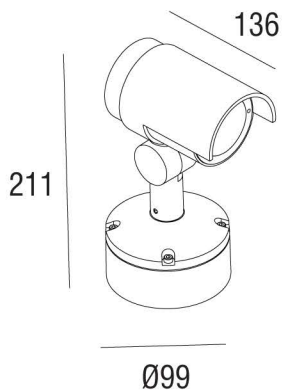

PHOTOMETRIC DATA



PIXIE WALL-SHORT FLOODLIGHT

CREE

CHIP LED

10

WATT

IP65

DIE-CAST
ALUMINIUM
MATERIAL

ANTHRACITE
COLOR

CE

SPECIFICATION

Model	:	PIXIE WALL - SHORT
Item No.	:	H166403
Light source	:	LED Chip
Power	:	10W
Lumen	:	1200 lm
Lumen/Watt	:	120 lm/W
CCT	:	3000K
CRI	:	>80
Beam Angle	:	41°
Material	:	Die-cast Aluminium
Color	:	Anthracite
Paint method	:	UV Powder coating
Optical cover	:	Safety glass lens
Adjustable	:	Yes (Adjust up to 70°)
IP	:	65
Driver Type	:	Driver on Board
Input Voltage	:	220-240V~ 50Hz
Power factor	:	>0.96
Dimension (WxLxH)	:	Ø99x136x211 mm.

ACCESSORY




+ Installation Manual


UNIT PRICE : 5,200.-



DIMENSION (Unit mm.)

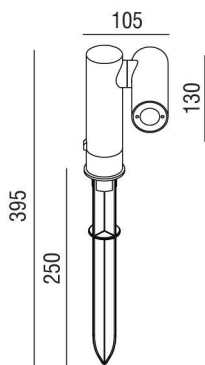

PHOTOMETRIC DATA

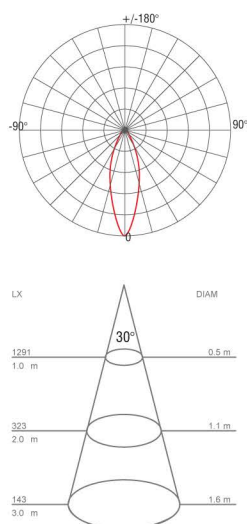

COLLIMATOR MINI FLOODLIGHT

CREE

CHIP LED

4.5

WATT

IP65

DIE-CAST
ALUMINIUM
MATERIAL

ANTHRACITE
COLOR

CE

SPECIFICATION

Model	:	COLLIMATOR MINI
Item No.	:	H1971A-03
Light source	:	LED Chip
Power	:	4.5W
Lumen	:	450 lm
Lumen/Watt	:	100 lm/W
CCT	:	3000K
CRI	:	>80
Beam Angle	:	30°
Material	:	Die-cast Aluminium
Color	:	Anthracite
Paint method	:	Outdoor UV Spray Powder
Optical cover	:	Safety glass lens
Adjustable	:	Yes (300°)
IP	:	65
Driver Type	:	Built-in Driver
Input Voltage	:	220-240V~ 50Hz
Power factor	:	>0.96
Dimension (WxLxH)	:	105x130x395 mm.

ACCESSORY



Plastic spike



rubber stopper



Hex Wrench

+ Installation Manual


UNIT PRICE : 3,000.-

**NEW
PRODUCT**




Adjustable
300°

DIMENSION (Unit mm.)

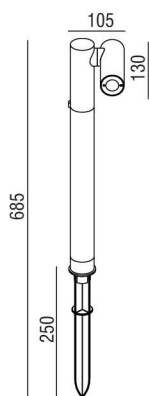

PHOTOMETRIC DATA

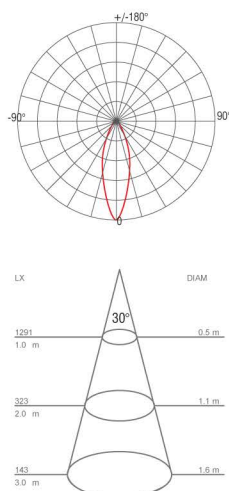

COLLIMATOR MAXI FLOODLIGHT

CREE

CHIP LED

4.5

WATT

IP65

DIE-CAST
ALUMINIUM
MATERIAL

ANTHRACITE
COLOR

CE

SPECIFICATION

Model	: COLLIMATOR MAXI
Item No.	: H1973A-03
Light source	: LED Chip
Power	: 4.5W
Lumen	: 450 lm
Lumen/Watt	: 100 lm/W
CCT	: 3000K
CRI	: >80
Beam Angle	: 30°
Material	: Die-cast Aluminium
Color	: Anthracite
Paint method	: Outdoor UV Spray Powder
Optical cover	: Clear glass
Adjustable	: Yes (300°)
IP	: 65
Driver Type	: Built-in Driver
Input Voltage	: 220-240V~ 50Hz
Power factor	: >0.96
Dimension (WxLxH)	: 105x130x685 mm.

ACCESSORY



Plastic spike



rubber stopper




Hex Wrench

+ Installation Manual



UNIT PRICE : 3,500.-



DIMENSION (Unit mm.)



PHOTOMETRIC DATA



LC-WD-MB18-617Z-90 FLOODLIGHT

CREE
CHIP LED

20
WATT

IP65

DIE-CAST
ALUMINIUM
MATERIAL

**BLACK
COLOR**

ECO

SPECIFICATION

Model	: LC-WD-MB18-617Z-90
Light source	: LED Chip
Power	: 20W
Lumen	: 2000 lm
Lumen/Watt	: 100 lm/W
CCT	: 3000K
CRI	: >80
Beam Angle	: 45°
Material	: Die-cast Aluminium
Color	: Black
Paint method	: Outdoor UV Spray Powder
Optical cover	: Safety glass lens
Adjustable	: Yes
IP	: 65
Driver Type	: Built-in Driver
Input Voltage	: 200-240V~ 50Hz
Power factor	: >0.96
Dimension (ØxLxH)	: Ø90×125×H197 mm.

ACCESSORY



Plastic Plug



Screw



Hex Wrench

UNIT PRICE : X,XXX.-

LC-WD-MB18-616-70 HUG HOOP LC-WD-MB23-0611 FOR HUG HOOP TREE RING FLOODLIGHT



Spotlight



Hug Hoop



SPECIFICATION

(Spotlight)

Model	: LC-WD-MB23-0611 FOR HUG HOOP
Light source	: LED Chip
Power	: 8W
Lumen	: 800 lm
Lumen/Watt	: 100 lm/W
CCT	: 3000K
CRI	: >80
Beam Angle	: 36°
Material	: Aluminium
Color	: Dark Grey
Paint method	: Outdoor UV Spray Powder
Optical cover	: Glass
Adjustable	: Yes
IP	: 65
Driver Type	: Built-in Driver
Input Voltage	: 200-240V~ 50Hz
Power factor	: >0.96
Dimension (WxLxH)	: 65x65x105 mm.

(Hug Hoop)

Model	: LC-WD-MB18-616-70 HUG HOOP
Material	: Ring 201 Stainless
Color	: Dark Grey
Paint method	: Outdoor UV Spray Powder
Dimension (ØxH)	: Ø700×H50 mm. Suitable for tree diameter 250-600 mm.

ACCESSORY



Cable 2 m.



Hex Wrench




Bracket


UNIT PRICE : x,xxx.-



DIMENSION (Unit mm.)

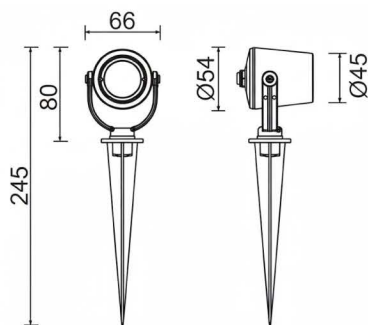

PHOTOMETRIC DATA



LC-YL-6000MINI FLOODLIGHT

CREE

CHIP LED

3

WATT

IP65

DIE-CAST
ALUMINIUM
MATERIAL

ANTHRACITE
COLOR

CE



SPECIFICATION

Model	: LC-YL-6000MINI
Light source	: LED Chip
Power	: 3W
Lumen	: 232 lm
Lumen/Watt	: 77.33 lm/W
CCT	: 3000K
CRI	: >80
Beam Angle	: 40°
Material	: Die-cast Aluminium
Color	: Anthracite
Paint method	: UV Powder coating
Optical cover	: Clear Tempered glass
Adjustable	: Yes (Adjust up to 150°)
IP	: 65
Driver Type	: Driver on Board
Input Voltage	: 220-240V~ 50Hz
Power factor	: >0.96
Dimension (WxLxH)	: 80x66x245 _± mm.

ACCESSORY




Plastic spike
included

+ Installation Manual

UNIT PRICE : X,XXX.-



DIMENSION (Unit mm.)



LED
CHIP

5
WATT

IP65

DIE-CAST
ALUMINIUM
MATERIAL

ANTHRACITE
COLOR

LC-4504 FLOODLIGHT



SPECIFICATION

Model	: LC-4504
Light source	: LED Chip
Power	: 5W
Lumen	: 250 lm
Lumen/Watt	: 50 lm/W
CCT	: 3000K
CRI	: >80
Beam Angle	: 36°
Material	: Die-cast Aluminium
Color	: Black
Paint method	: UV Powder coating
Optical cover	: Clear tempered glass
Adjustable	: Yes
IP	: 65
Driver Type	: Driver on Board
Input Voltage	: 220-240V~ 50Hz
Power factor	: >0.96
Dimension (ØxLxH)	: Ø50x80x230 mm.

ACCESSORY



Plastic spike
included

+ Installation Manual

UNIT PRICE : X,XXX.-

LUC 




CEILING LIGHT





Adjustable 20°

DIMENSION (Unit mm.)



PHOTOMETRIC DATA



POINTER CEILING LIGHT

CREE
CHIP LED

9
WATT

IP65

DIE-CAST
ALUMINIUM
MATERIAL

ANTHRACITE
COLOR

CE

SPECIFICATION

Model	: POINTER
Item No.	: 2160103
Light source	: LED Chip
Power	: 9W
Lumen	: 900 lm
Lumen/Watt	: 100 lm/W
CCT	: 3000K
CRI	: >80
Beam Angle	: 43°
Material	: Die-cast Aluminium
Color	: Anthracite
Paint method	: Outdoor UV Spray Powder
Optical cover	: Safety glass lens
Adjustable	: Yes 20°
IP	: 65
Driver Type	: Built-in Driver
Input Voltage	: 220-240V~ 50Hz
Power factor	: >0.96
Dimension (WxLxH)	: 90×90×102.5 mm.

ACCESSORY



Plastic Plug



rubber stopper



Screw



Hex Wrench


+ Installation Manual

UNIT PRICE : 4,000.-



BRIGHTER CEILING LIGHT



DIMENSION (Unit mm.)



PHOTOMETRIC DATA



CREE
CHIP LED

20
WATT

IP65

DIE-CAST
ALUMINIUM
MATERIAL

ANTHRACITE
COLOR

CE

SPECIFICATION

Model	:	BRIGHTER
Item No.	:	H199103
Light source	:	LED Chip
Power	:	20W
Lumen	:	2000 lm
Lumen/Watt	:	100 lm/W
CCT	:	3000K
CRI	:	>80
Beam Angle	:	34°
Material	:	Die-cast Aluminium
Color	:	Anthracite
Paint method	:	Outdoor UV Spray Powder
Optical cover	:	Safety glass lens
Adjustable	:	-
IP	:	65
Driver Type	:	Driver on Board
Input Voltage	:	220-240V~ 50Hz
Power factor	:	>0.96
Dimension (WxLxH)	:	95×95×105 mm.

ACCESSORY



Plastic Plug



rubber stopper



Screw




Hex Wrench

+ Installation Manual


UNIT PRICE : 5,800.-



DIMENSION (Unit mm.)



PHOTOMETRIC DATA

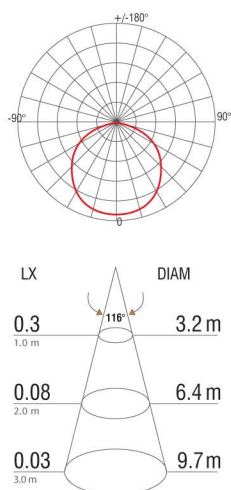

AVO ROUND

CEILING LIGHT

CREE

CHIP LED

18

WATT

IP65

DIE-CAST
ALUMINIUM
MATERIAL

ANTHRACITE
COLOR

CE

SPECIFICATION

Model	: AVO ROUND
Item No.	: 1020103
Light source	: LED Chip
Power	: 18W
Lumen	: 1800 lm
Lumen/Watt	: 100 lm/W
CCT	: 3000K
CRI	: >80
Beam Angle	: 116°
Material	: Die-cast Aluminium
Color	: Anthracite
Paint method	: Outdoor UV Spray Powder
Optical cover	: Safety glass lens
Adjustable	: -
IP	: 54
Driver Type	: Built-in Driver
Input Voltage	: 220-240V~ 50Hz
Power factor	: >0.96
Dimension (ØxH)	: Ø250×68 mm.

ACCESSORY



Hex Wrench



Screw



Plastic Plug




Rubber Stopper

+ Installation Manual

UNIT PRICE : 4,200.-


LUC 

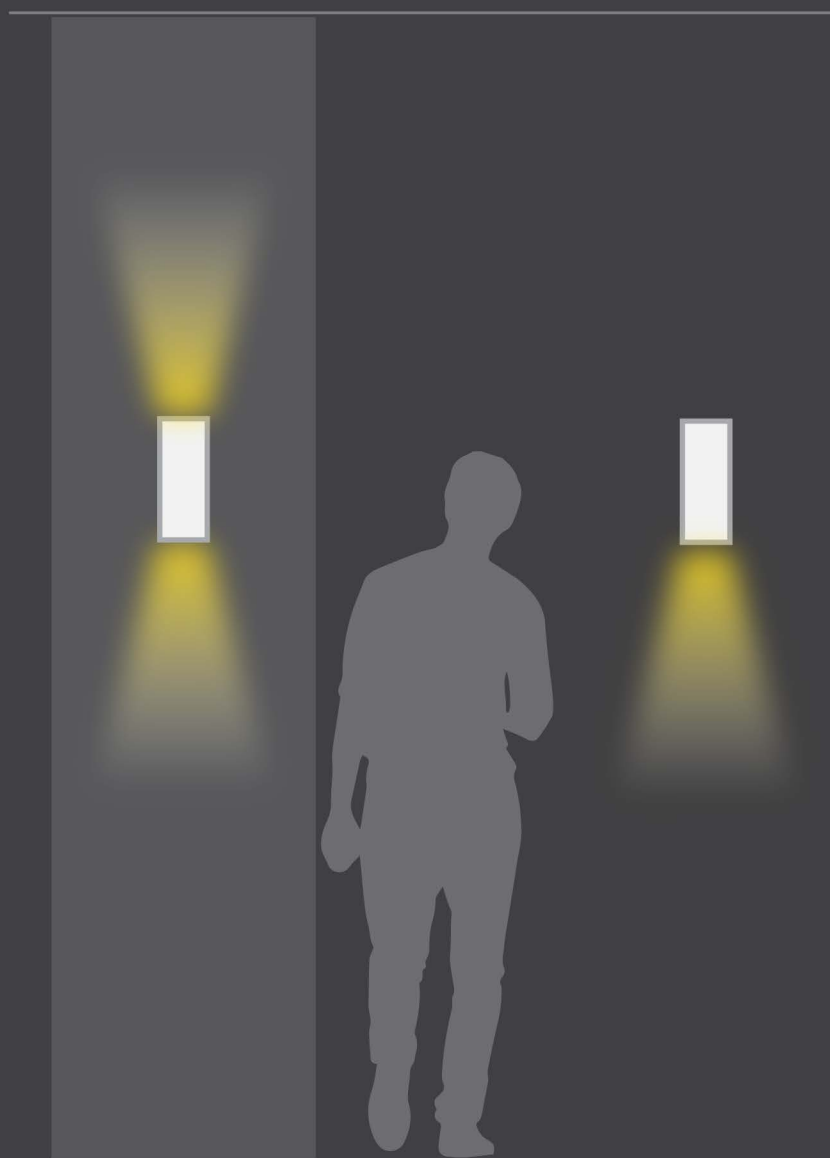



WALLS LIGHT



DIMENSION (Unit mm.)



PHOTOMETRIC DATA



CREE

CHIP LED

7

WATT

IP65

DIE-CAST
ALUMINIUM
MATERIAL

ANTHRACITE
COLOR

CE

DUAL MINI WALL LIGHT

SPECIFICATION

Model	:	DUAL MINI
Item No.	:	H262203
Light source	:	LED Chip
Power	:	7W
Lumen	:	700 lm
Lumen/Watt	:	100 lm/W
CCT	:	3000K
CRI	:	>80
Beam Angle	:	72°
Material	:	Die-cast Aluminium
Color	:	Anthracite
Paint method	:	Outdoor UV Spray Powder
Optical cover	:	Safety glass lens
Adjustable	:	-
IP	:	65
Driver Type	:	Built-in Driver
Input Voltage	:	220-240V~ 50Hz
Power factor	:	>0.96
Dimension (WxLxH)	:	62×82×95 mm.

ACCESSORY



Hex Wrench



Screw



Plastic Plug




Rubber Stopper

+ Installation Manual



UNIT PRICE : 3,900.-



DIMENSION (Unit mm.)

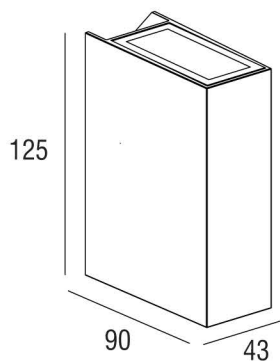

PHOTOMETRIC DATA



CREE
CHIP LED

2x4
WATT

IP65

DIE-CAST
ALUMINIUM
MATERIAL

ANTHRACITE
COLOR

CE

ILOS WALL LIGHT

SPECIFICATION

Model	:	ILOS
Item No.	:	1130103
Light source	:	LED Chip
Power	:	2x4W
Lumen	:	2x400 lm
Lumen/Watt	:	100 lm/W
CCT	:	3000K
CRI	:	>80
Beam Angle	:	50°
Material	:	Die-cast Aluminium
Color	:	Anthracite
Paint method	:	Outdoor UV Spray Powder
Optical cover	:	Safety glass lens
Adjustable	:	-
IP	:	65
Driver Type	:	Built-in Driver
Input Voltage	:	220-240V~ 50Hz
Power factor	:	>0.96
Dimension (WxLxH)	:	90×43×125mm.

ACCESSORY



Hex Wrench



Screw



Plastic Plug




Rubber Stopper

+ Installation Manual


UNIT PRICE : 3,900.-



DIMENSION (Unit mm.)



PHOTOMETRIC DATA

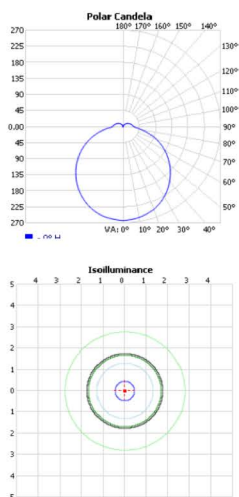

LC-WALL LAMP E001

WALL LIGHT

CREE
CHIP LED

4
WATT

IP65

STAINLESS
MATERIAL


WHITE
COLOR

SPECIFICATION


Model	: LC-WALL LAMP E001
Light source	: LED Chip
Power	: 4W
Lumen	: 400 lm
Lumen/Watt	: 100 lm/W
CCT	: 3000K
CRI	: >0.9
Beam Angle	: -
Material	: Stainless steel
Color	: White
Paint method	: Powder coating
Diffuser	: PMMA
Adjustable	: -
IP	: 65
Driver Type	: Built-in Driver
Input Voltage	: DC 24V
Power factor	: >0.96
Dimension (ØxH)	: Ø78×72 mm.

UNIT PRICE : 3,500.-




**NEW
PRODUCT**

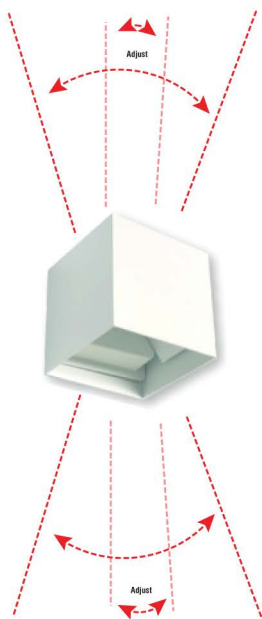

DIMENSION (Unit mm.)



ADJUSTABLE



LC-WALL LIGHT-100

WALL LIGHT

G9

LAMP LED

4

WATT

IP65

ALUMINIUM
MATERIAL

WHITE
COLOR

SPECIFICATION

Model	:	LC-WALL LIGHT-100
Light source	:	1 x LED G9 (Waterproof Socket IP65)
Power	:	3.2W
Material	:	Aluminium
Color	:	White
Paint method	:	Outdoor UV Spray Powder
Adjustable	:	Yes
IP	:	65
Input Voltage	:	220V-240V~ 50Hz
Dimension (WxLxH)	:	100×100×100 mm.

ACCESSORY



Hex Wrench



Plastic Plug



Screw

LIGHT SOURCE





LED G9


UNIT PRICE : X,XXX.-



DIMENSION (Unit mm.)



PHOTOMETRIC DATA



LC-YL-HALO-2023-W

WALL LIGHT

CREE
CHIP LED

10
WATT

IP65

DIE-CAST
ALUMINIUM
MATERIAL

ANTHRACITE
COLOR

CE


SPECIFICATION

Model	: LC-YL-HALO-2023-W
Light source	: LED Chip
Power	: 10W
Lumen	: 656 lm
Lumen/Watt	: 65 lm/W
CCT	: 3000K
CRI	: >80
Beam Angle	: 114°
Material	: Die-cast Aluminum housing Extruded Aluminum pole
Color	: Matt Anthracite (V322401S)
Paint method	: Outdoor UV Spray Powder
Diffuser	: Opal PC lens
Adjustable	: -
IP	: 65
Driver Type	: Built-in Driver
Power Voltage	: 220V-240V~ 50Hz
Power factor	: >0.96
Dimension (ØxWxH)	: Ø220×225×H220 mm.


UNIT PRICE : X,XXX.-




Adjustable Headlamp
Reduce Back Light (Bug Rating)
Conforming To Leed

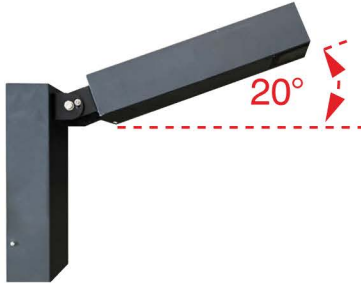

DIMENSION (Unit mm.)

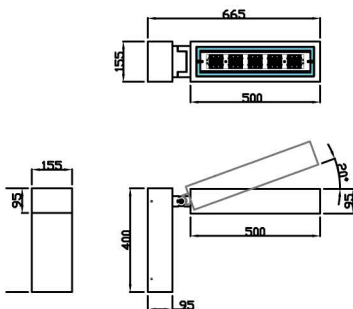

PHOTOMETRIC DATA

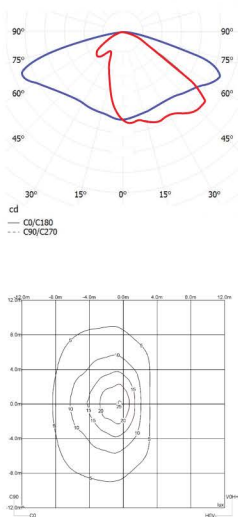

LC-WD-B135-ADJUST - SMALL WALL LIGHT

CREE

CHIP LED

50
WATT

IP65

ALUMINIUM
MATERIAL

MATT
ANTHRACITE
COLOR

MW
MEAN WELL
DRIVER


SPECIFICATION

Model	: LC-WD-B135-ADJUST - small
Light source	: Cree LED Chip
Power	: 50W
Lumen	: 5800 lm
Lumen/Watt	: 116 lm/w
CCT	: 4000K
CRI	: >80
Beam Angle	: 152°x 72°
Material	: Aluminium
Color	: Matt Anthracite (V322401S)
Paint method	: Outdoor UV Spray Powder
Optical cover	: Tempered clear glass
Adjustable	: 20°
IP	: 65
Driver Type	: External Driver meanwell
Power Voltage	: 220-240V AC 50/60Hz
Power factor	: >0.96
Dimension (WxLxH)	: 155×665×400 mm.



UNIT PRICE : X,XXX.-





Adjustable Headlamp
Reduce Back Light (Bug Rating)
Conforming To Leed

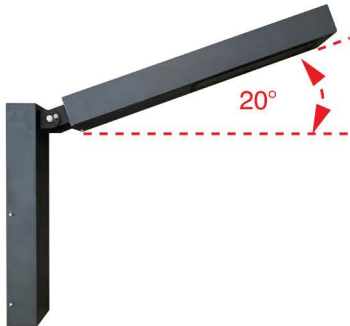

DIMENSION (Unit mm.)



PHOTOMETRIC DATA



LC-WD-B135-ADJUST WALL LIGHT

LUMILEDS
CHIP LED

60
WATT

IP65

ALUMINIUM
MATERIAL

MATT
ANTHRACITE
COLOR

MW
MEAN WELL
DRIVER

SPECIFICATION

Model	: LC-WD-B135-ADJUST
Light source	: LED Chip
Power	: 60W
Lumen	: 6960 lm
Lumen/Watt	: 116 lm/w
CCT	: 4000K
CRI	: >80
Beam Angle	: 152°x 72°
Material	: Aluminium
Color	: Matt Anthracite (V322401S)
Paint method	: Outdoor UV Spray Powder
Optical cover	: Tempered clear glass
Adjustable	: 90°-110°
IP	: 65
Driver Type	: External Driver meanwell
Input Voltage	: 220-240V AC 50/60Hz
Power factor	: >0.96
Dimension (WxLxH)	: 200×1100×705 mm.

UNIT PRICE : x,xxx.-



E27
LAMP

IP54


DIE-CAST
ALUMINIUM
MATERIAL

ANTHRACITE
COLOR

CE



DIMENSION (Unit mm.)



SPECIFICATION

Model	:	VIDO GROUND TOP
Item No.	:	146403
Light source	:	E27 (socket IP65)
Power	:	MAX.15 WATT (A60)
Material	:	Die-cast Aluminium
Color	:	Anthracite
Paint method	:	Outdoor UV Spray Powder
Diffuser	:	Clear glass
Adjustable	:	-
IP	:	54
Driver Type	:	-
Input Voltage	:	220V-240V~ 50Hz
Power factor	:	-
Dimension (WxLxH)	:	200×200×245mm.

ACCESSORY



Hex Wrench



Screw



Plastic Plug

+ Installation Manual

UNIT PRICE : 4,700.-



E27
LAMP

IP54

DIE-CAST
ALUMINIUM
MATERIAL


ANTHRACITE
COLOR

CE

VIDO WALL LIGHT



DIMENSION (Unit mm.)



ACCESSORY



Hex Wrench



Screw



+ Installation Manual

SPECIFICATION

Model	: VIDO
Item No.	: 146103
Light source	: E27 (socket IP65)
Power	: MAX.15 WATT (A60)
Material	: Die-cast Aluminium
Color	: Anthracite
Paint method	: Outdoor UV Spray Powder
Diffuser	: Clear glass
Adjustable	: -
IP	: 54
Driver Type	: -
Input Voltage	: 220V-240V~ 50Hz
Power factor	: -
Dimension (WxLxH)	: 180×176×300 mm.

UNIT PRICE : 4,700.-



VIDO WALL MAXI

WALL LIGHT

2xE27
LAMP


IP54

**DIE-CAST
ALUMINIUM
MATERIAL**

**ANTHRACITE
COLOR**

CE

DIMENSION (Unit mm.)



ACCESSORY



Hex Wrench



Screw



+ Installation Manual


SPECIFICATION

Model	:	VIDO WALL MAXI
Item No.	:	146203
Light source	:	2xE27 (socket IP65)
Power	:	MAX.15 WATT (A60)
Material	:	Die-cast Aluminium
Color	:	Anthracite
Paint method	:	Outdoor UV Spray Powder
Diffuser	:	Clear glass
Adjustable	:	-
IP	:	54
Driver Type	:	-
Input Voltage	:	220V-240V~ 50Hz
Power factor	:	-
Dimension (WxLxH)	:	140×160×300 mm.

UNIT PRICE : 5,200.-



DIMENSION (Unit mm.)



ACCESSORY



Hex Wrench



Screw



+ Installation Manual

VIDO ULTRA WALL LIGHT

WALL LIGHT

E27

LAMP

IP54

DIE-CAST
ALUMINIUM
MATERIAL

ANTHRACITE
COLOR

CE

SPECIFICATION


Model	:	VIDO ULTRA WALL LIGHT
Item No.	:	H3031-AN
Light source	:	E27 (socket IP65)
Power	:	MAX.15 WATT (A60)
Material	:	Die-cast Aluminium
Color	:	Anthracite
Paint method	:	Outdoor UV Spray Powder
Diffusr	:	Clear glass
Adjustable	:	-
IP	:	54
Driver Type	:	-
Input Voltage	:	220V-240V~ 50Hz
Power factor	:	-
Dimension (WxLxH)	:	180×180×300mm.

UNIT PRICE : 4,700.-


**NEW
PRODUCT**



DIMENSION (Unit mm.)

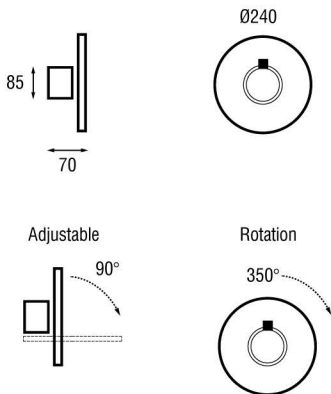

PHOTOMETRIC DATA

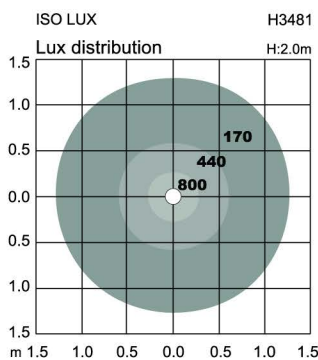

LC-H3481 WALL LIGHT


**LUMILEDS
LED**

**9.4
WATT**

IP65

**ALUMINIUM
MATERIAL**

**ANTHRACITE
COLOR**

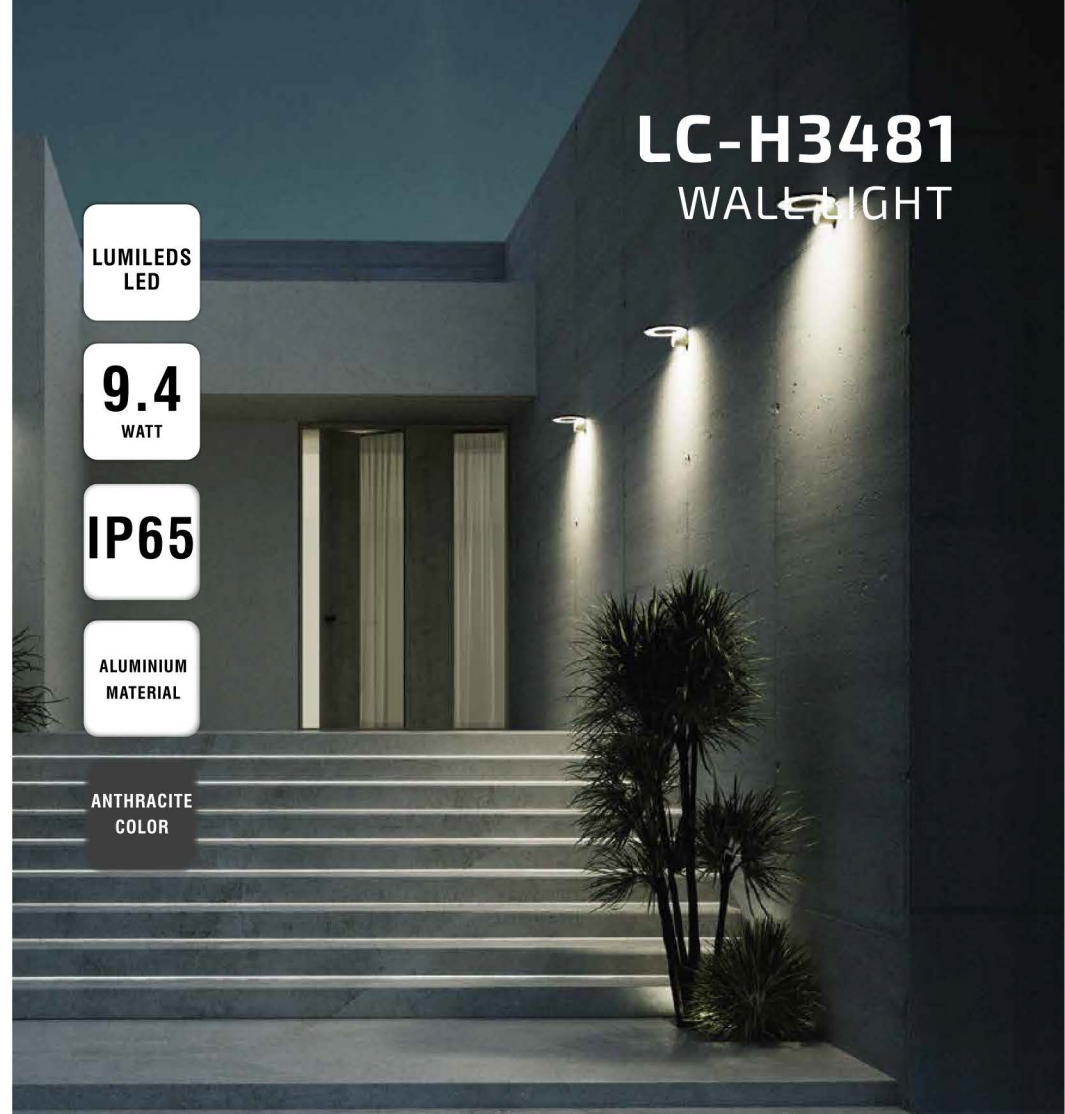

SPECIFICATION

Model	: LC-H3481
Light source	: LED
Power	: 9.4W
Lumen	: 780 lm
Lumen/Watt	: 82 lm/W
CCT	: 3000K
CRI	: ≥ 80
Beam Angle	: 105°
Material	: Die-cast Aluminium
Color	: Anthracite
Paint method	: Powder coating Polyester
Diffuser	: Frost polycarbonate
Adjustable	: Yes
IP	: 65
Driver Type	: Built-in Driver
Input Voltage	: 220-240Vac~50Hz
Power Factor	: 0.96
Dimension (ØxH)	: 240x70 mm.

ACCESSORY



Hex Wrench



Plastic Plug



Rubber Stopper



Screw



+ Installation Manual

UNIT PRICE : xxxx.-


**NEW
PRODUCT**



DIMENSION (Unit mm.)



PHOTOMETRIC DATA

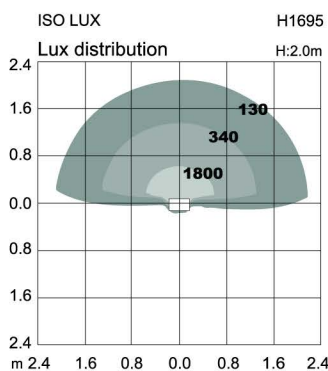

**LUMILEDS
LED**


**10
WATT**

IP65

**DIE-CAST
ALUMINIUM
MATERIAL**

**ANTHRACITE
COLOR**

LC-H1695 WALL LIGHT

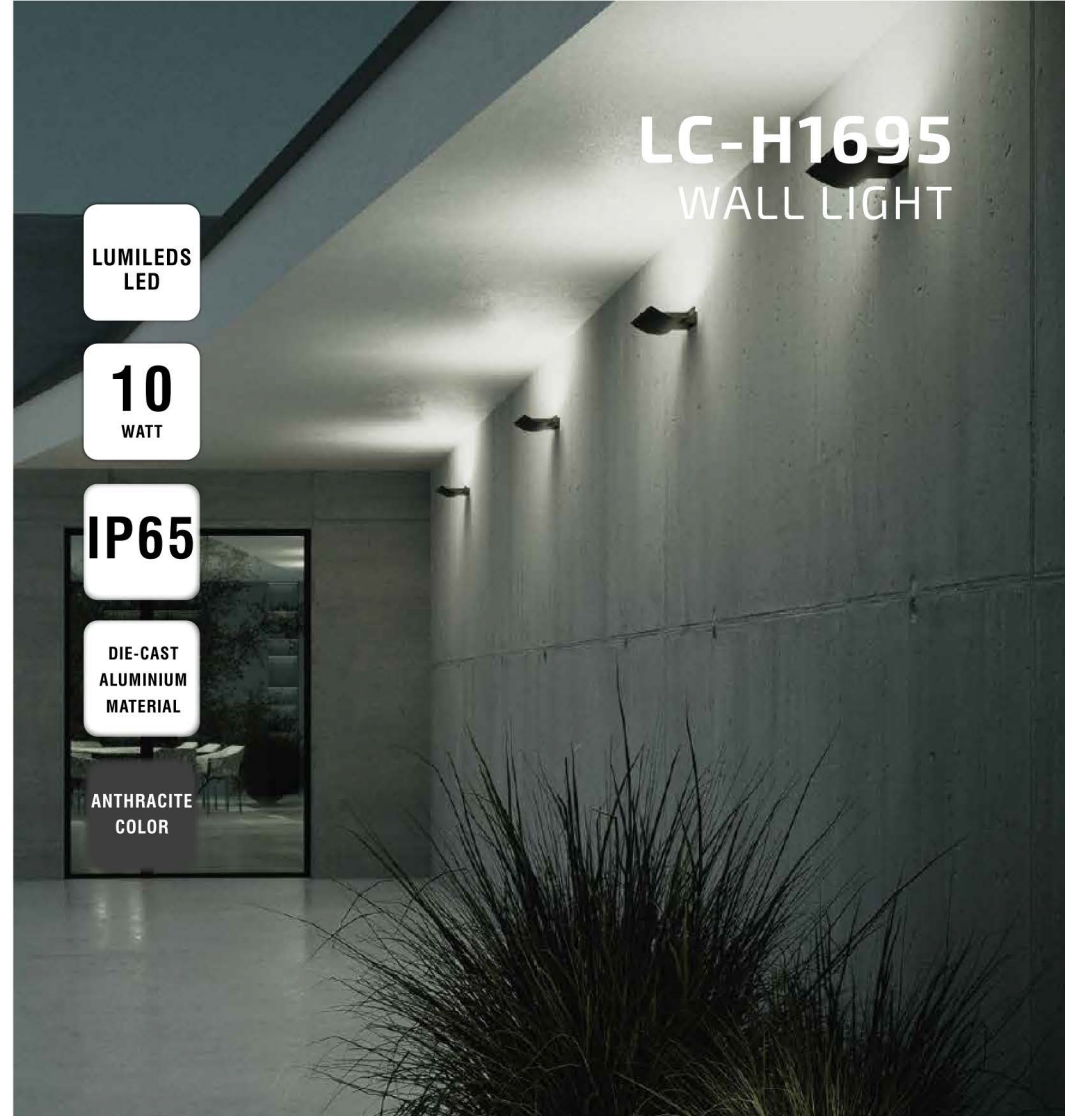

SPECIFICATION

Model	: LC-H1695
Light source	: LED
Power	: 10W
Lumen	: 1318 lm
Lumen/Watt	: 131 lm/W
CCT	: 3000K
CRI	: ≥ 80
Beam Angle	: 112°
Material	: Die-cast Aluminium
Color	: Anthracite
Paint method	: Powder coating Polyester
Diffuser	: Tempered Clear Glass
Adjustable	: No
IP	: 65
Driver Type	: Built-in Driver
Input Voltage	: 220-240Vac~50Hz
Power Factor	: 0.96
Dimension (WxLxH)	: 300x190x43 mm.

ACCESSORY



Hex Wrench



Plastic Plug



Rubber Stopper



Screw

+ Installation Manual

UNIT PRICE : xxxx.-

**NEW
PRODUCT**



LC-H3415 WALL LIGHT


LUMILEDS
LED

10
WATT


IP65

DIE-CAST
ALUMINIUM
MATERIAL


ANTHRACITE
COLOR

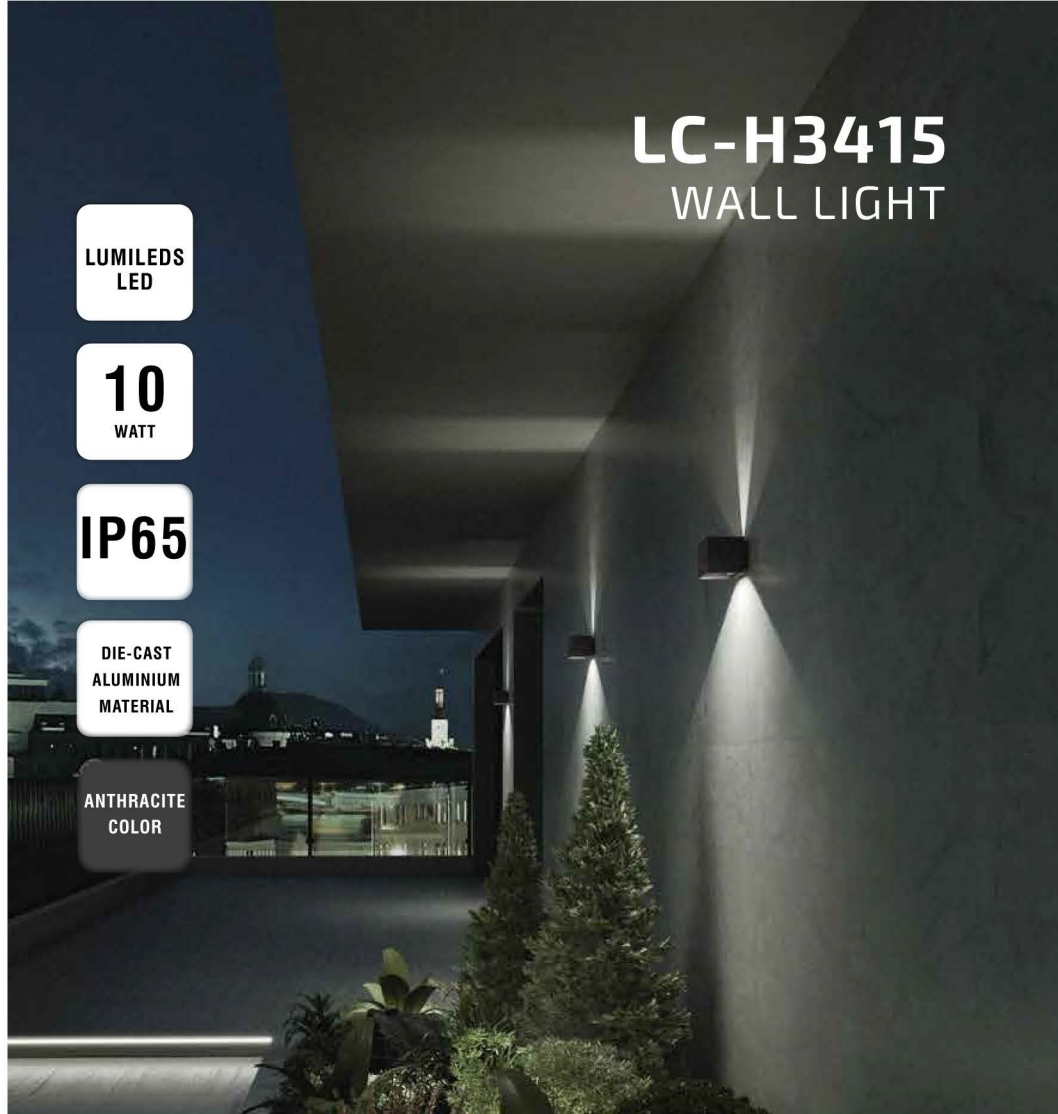

DIMENSION (Unit mm.)

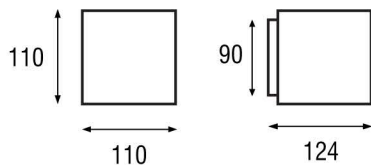

PHOTOMETRIC DATA



SPECIFICATION

Model	: LC-H3415
Light source	: LED
Power	: 10W
Lumen	: 842 lm
Lumen/Watt	: 84 lm/W
CCT	: 3000K
CRI	: ≥ 80
Beam Angle	: 104°
Material	: Die-cast Aluminium
Color	: Anthracite
Paint method	: Powder coating Polyester
Diffuser	: Tempered Clear Glass
Adjustable	: No
IP	: 65
Driver Type	: Built-in Driver
Input Voltage	: 220-240Vac~50Hz
Power Factor	: 0.96
Dimension (WxLxH)	: 110x110x124mm.

ACCESSORY



Hex Wrench



Plastic Plug




Rubber Stopper



Screw

+ Installation Manual



UNIT PRICE : xxxx.-

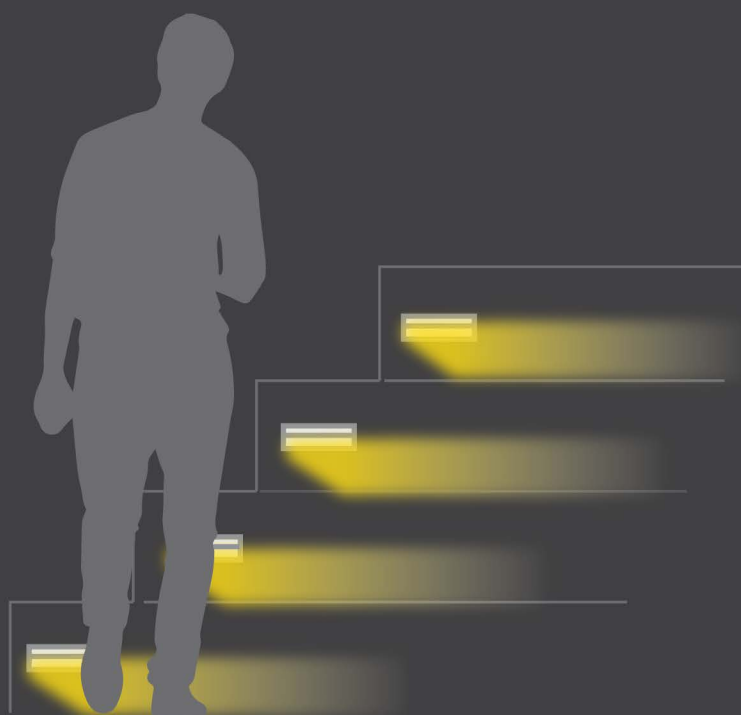



STEP LIGHT



DIMENSION (Unit mm.)



PHOTOMETRIC DATA



LC-WD-MB18-QVJ17

STEPLIGHT

CREE
CHIP LED

3
WATT

IP65

ALUMINIUM
MATERIAL

BLACK
COLOR


SPECIFICATION

Model	: LC-WD-MB18-QJ17
Light source	: LED Chip
Power	: 3W
Lumen	: 300 lm
Lumen/Watt	: 100 lm/W
CCT	: 3000K
CRI	: >80
Beam Angle	: 33°
Material	: Aluminum+glass
Color	: Black
Paint method	: Outdoor UV Spray Powder
Optical cover	: Safety glass lens
Adjustable	: -
IP	: 65
Driver Type	: Built-in Driver
Input Voltage	: 110-240V~50Hz
Power factor	: >0.96
Dimension (WxLxH)	: 110×55×H45 mm.
Cut Out (WxLxH)	: 110×50×43 mm.



UNIT PRICE : 1,500.-



DIMENSION (Unit mm.)



PHOTOMETRIC DATA



CREE

CHIP LED

3

WATT

IP65

DIE-CAST
ALUMINIUM
MATERIAL

CE

SPECIFICATION

Model	: STEP LIGHT
Item No.	: 279103-LED
Light source	: LED Chip
Power	: 3W
Lumen	: 300 lm
Lumen/Watt	: 100 lm/W
CCT	: 3000K
CRI	: >80
Beam Angle	: 84°
Material	: 304 grade stainless steel cover
Color	: Stainless steel
Paint method	: Outdoor UV Spray Powder
Optical cover	: Frost PC diffuser
Adjustable	: -
IP	: 65
Driver Type	: Built-in Driver
Input Voltage	: 220-240V~50Hz
Power factor	: >0.96
Dimension (WxLxH)	: 72×70×170 mm.

ACCESSORY



Screw



Hex Wrench

+ Installation Manual

STEP LIGHT

STEPLIGHT

UNIT PRICE : 4,000.-

TRICK STEPLIGHT



CREE

CHIP LED

15

WATT


IP65

DIE-CAST
ALUMINIUM
MATERIAL



ANTHRACITE
COLOR

CE

DIMENSION (Unit mm.)

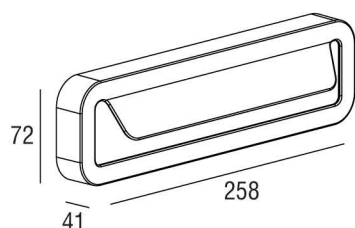

PHOTOMETRIC DATA



SPECIFICATION

Model	: TRICK
Item No.	: 1820103
Light source	: LED Chip
Power	: 15W
Lumen	: 1500 lm
Lumen/Watt	: 100 lm/W
CCT	: 3000K
CRI	: >80
Beam Angle	: 74°
Material	: Die-cast Aluminium
Color	: Anthracite
Paint method	: Outdoor UV Spray Powder
Optical cover	: Safety glass lens
Adjustable	: -
IP	: 65
Driver Type	: Built-in Driver
Input Voltage	: 220-240V~50Hz
Power factor	: >0.96
Dimension (WxLxH)	: 41×258×72 mm.

ACCESSORY



Hex Wrench



Screw



Plastic Plug



rubber stopper


+ Installation Manual

UNIT PRICE : 4,500.-


**NEW
PRODUCT**



DIMENSION (Unit mm.)



PHOTOMETRIC DATA



**LUMILEDS
LED**

**4
WATT**

IP65

**DIE-CAST
ALUMINIUM
MATERIAL**

**ANTHRACITE
COLOR**

SPECIFICATION

Model	: LC-H3506
Light source	: LED
Power	: 4W
Lumen	: 267 lm
Lumen/Watt	: 67 lm/W
CCT	: 3000K
CRI	: ≥ 80
Beam Angle	: 87°
Material	: Die-cast Aluminium
Color	: Anthracite
Paint method	: Powder coating
Diffuser	: Clear Polycarbonate
Adjustable	: No
IP	: 65
Driver Type	: Built-in Driver
Input Voltage	: 220-240Vac~50Hz
Power factor	: 0.96
Dimension (WxH)	: 110x74 mm.

ACCESSORY



Hex Wrench



Rubber Stopper




Plastic Plug



Screw


+ Installation Manual

**LC-H3506
STEPLIGHT**

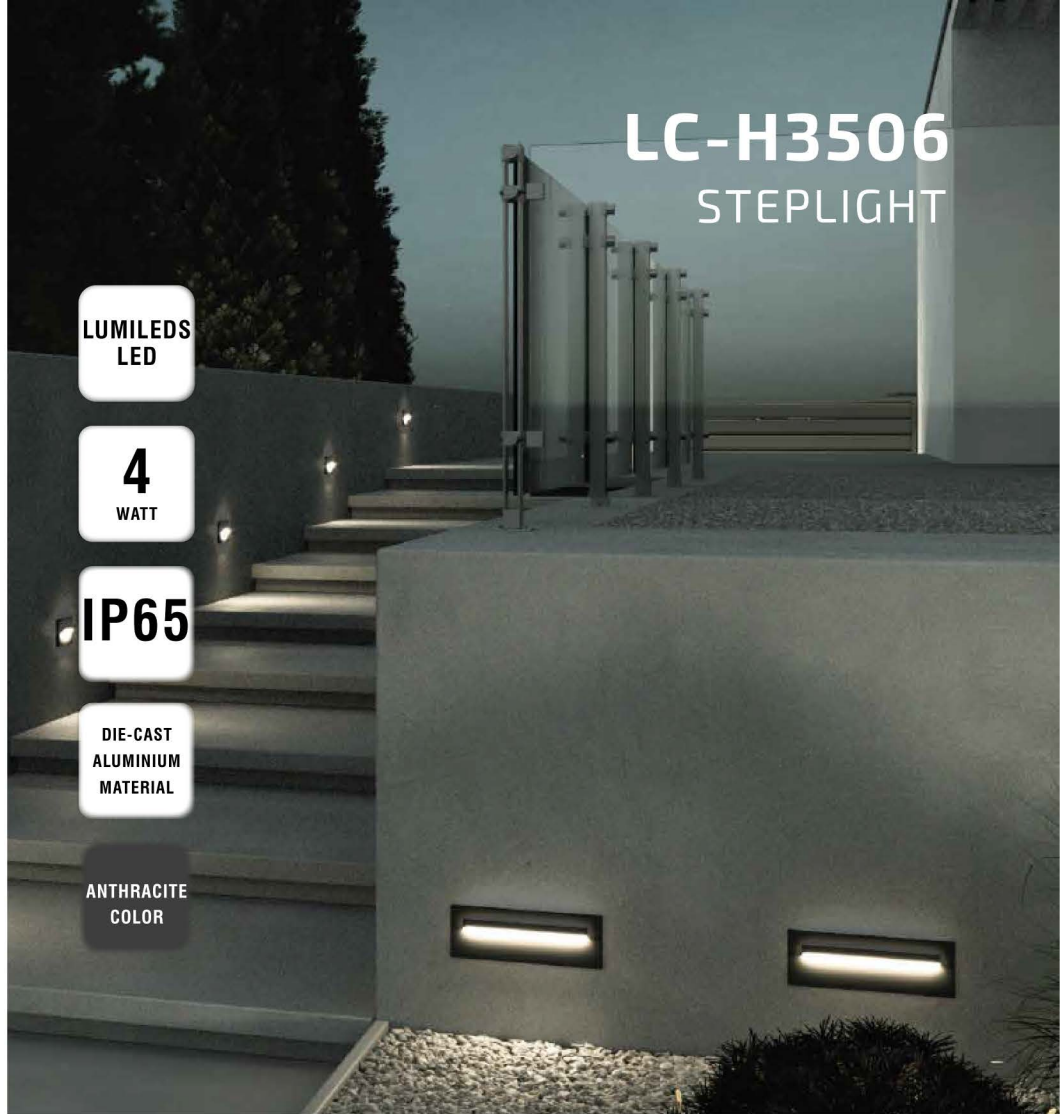

UNIT PRICE : XXXX.-

LUC 

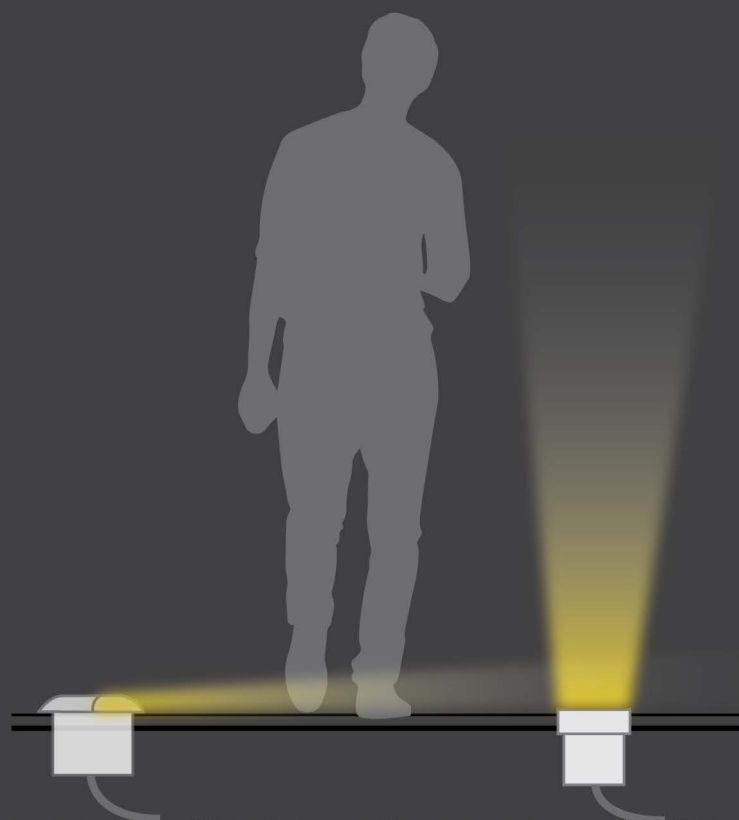

INGROUND




H121103
(1660103)




H121203

DIMENSION (Unit mm.)




*500kg static weight allowed

PHOTOMETRIC DATA

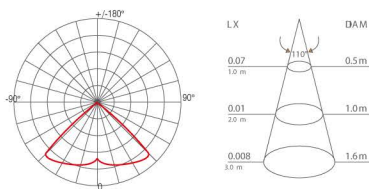

H121103



H121203

CREE
CHIP LED

7
WATT

IP67

DIE-CAST
ALUMINIUM
MATERIAL

ANTHRACITE
COLOR

CE

H121103 H121203 INGROUND

SPECIFICATION

Model	: H121103 , H121203
Light source	: LED Chip
Power	: 1x7W
Lumen	: 700 lm
Lumen/Watt	: 100 lm/W
CCT	: 3000K
CRI	: >80
Beam Angle	: 110° , 99°
Material	: Die-cast Aluminium
Color	: Anthracite
Paint method	: UV Powder coating
Optical cover	: Clear PC
Adjustable	: -
IP	: 67
Driver Type	: Built-in Driver
Input Voltage	: 220-240 VAC 50Hz
Power factor	: >0.96
Dimension (ØxH)	: Ø125×140 mm.

MORE INFORMATION



one side




two side


UNIT PRICE : 5,200.-



DIMENSION (Unit mm.)



PHOTOMETRIC DATA

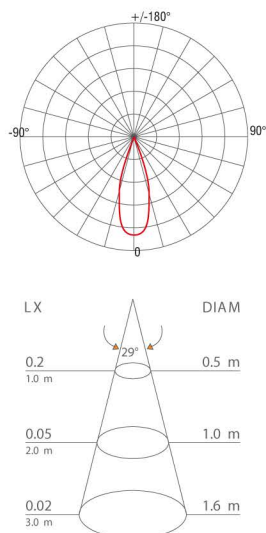

CREE
CHIP LED

1
WATT

IP67

DIE-CAST
ALUMINIUM
MATERIAL

STAINLESS
STEEL

CE

UP
INGROUND

SPECIFICATION

Model	: UP
Item No.	: 2190103
Light source	: LED Chip
Power	: 1W
Lumen	: 100 lm
Lumen/Watt	: 100 lm/W
CCT	: 3000K
CRI	: >80
Beam Angle	: 29°
Material	: 304 grade stainless steel
Color	: stainless steel
Paint method	: -
Optical cover	: Tempered frost glass
Adjustable	: -
IP	: 67
Driver Type	: Remote-Driver
Input Voltage	: 12Vdc
Power factor	: >0.96
Dimension (ØxH)	: Ø45×64 mm.

MORE INFORMATION




UNIT PRICE : 2,700.-


RECOMMEND
PRODUCT



DIMENSION (Unit mm.)

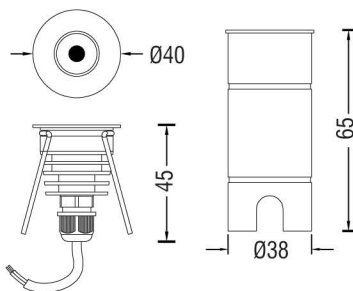

PHOTOMETRIC DATA

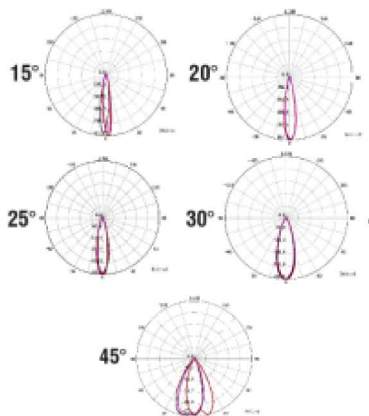

LC-UL-1001-0300-B

INGROUND

CREE

CHIP LED

3

WATT

IP67

ALUMINIUM
MATERIAL

STAINLESS
STEEL
316

CE

SPECIFICATION

Model	: LC-UL-1001-0300-B
Light source	: LED Chip
Power	: 3W
Lumen	: 300 lm
Lumen/Watt	: 100 lm/W
CCT	: 3000K
CRI	: >80
Beam Angle	: 15°, 20°, 25°, 30°, 45°
Material	: Stainless Steel 316
Color	: Stainless steel
Paint method	: -
Optical cover	: Step tempered glass
Adjustable	: -
IP	: 67
Driver Type	: Remote-Driver
Input Voltage	: 12Vdc
Power factor	: >0.96
Dimension (ØxH)	: Ø40×45 mm.

ACCESSORY

Mounting Sleeve

: Passivated (Anodizing)

Aluminum CNC machined .Dark grey

Clip

: With Aluminium spring that's for
deck lights or ceiling lights
application

HOUSING



UNIT PRICE : 3,000.-

LUC 



ON GROUND

DRYUP ON GROUND



CREE
CHIP LED

15
WATT


IP65

DIE-CAST
ALUMINIUM
MATERIAL



ANTHRACITE
COLOR

CE

DIMENSION (Unit mm.)

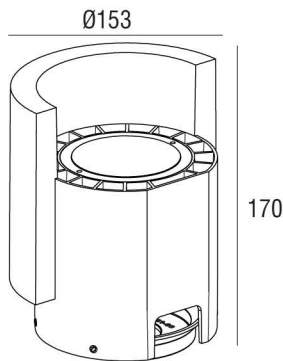

PHOTOMETRIC DATA



SPECIFICATION

Model	:	DRYUP
Item No.	:	H1281
Light source	:	LED Chip
Power	:	15W
Lumen	:	1500 lm
Lumen/Watt	:	100 lm/W
CCT	:	3000K
CRI	:	>80
Beam Angle	:	35°
Material	:	Die-cast Aluminium
Color	:	Anthracite
Paint method	:	Outdoor UV Spray Powder
Optical cover	:	Safety glass lens
Adjustable	:	-
IP	:	65
Driver Type	:	Built-in Driver
Input Voltage	:	220-240V~50Hz
Power factor	:	>0.96
Dimension (ØxH)	:	Ø153×170 mm.


ACCESSORY




OPTIONS






UNIT PRICE : 8,600.-



DIMENSION (Unit mm.)

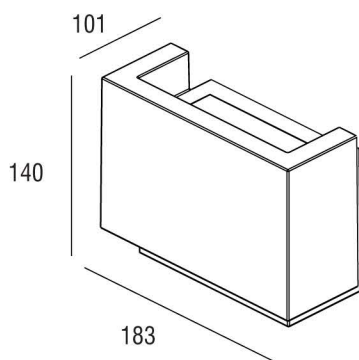

PHOTOMETRIC DATA

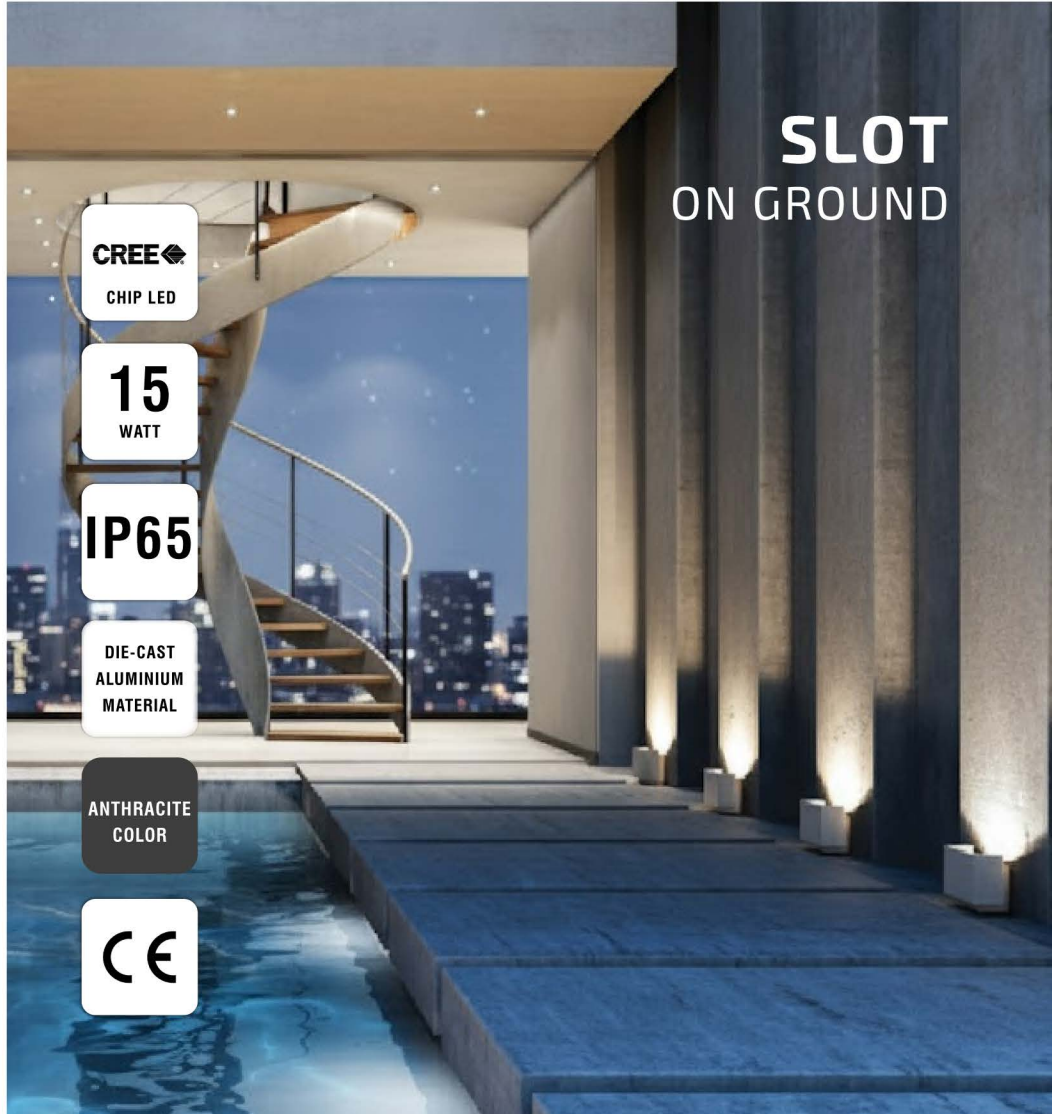

SLOT ON GROUND

CREE

CHIP LED

15

WATT

IP65

DIE-CAST
ALUMINIUM
MATERIAL

ANTHRACITE
COLOR

CE

SPECIFICATION

Model	: SLOT
Item No.	: 1800103
Light source	: LED Chip
Power	: 15W
Lumen	: 1500 lm
Lumen/Watt	: 100 lm/W
CCT	: 3000K
CRI	: >80
Beam Angle	: 102°
Material	: Die-cast Aluminium
Color	: Anthracite
Paint method	: Outdoor UV Spray Powder
Optical cover	: Safety glass lens
Adjustable	: -
IP	: 65
Driver Type	: Built-in Driver
Input Voltage	: 220-240V~50Hz
Power factor	: >0.96
Dimension (WxLxH)	: 101×183×140 mm.

ACCESSORY



Stainless Steel
Cable Gland



Screw



Plastic Plug



Hex Wrench


+ Installation Manual

UNIT PRICE : 8,600.-



**NEW
PRODUCT**



DIMENSION (Unit mm.)

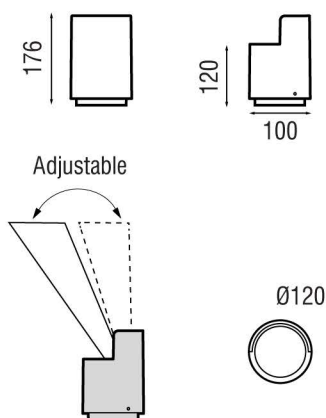

PHOTOMETRIC DATA



LC-H1285-LED ON GROUND

CREE

CHIP LED

8

WATT

IP67

DIE-CAST
ALUMINIUM
MATERIAL

ANTHRACITE
COLOR

SPECIFICATION

Model	: LC-H1285-LED
Light source	: LED
Power	: 8W
Lumen	: 647 lm
Lumen/Watt	: 80 lm/W
CCT	: 3000K
CRI	: ≥ 80
Beam Angle	: 13°
Material	: Die-cast Aluminium
Color	: Anthracite
Paint method	: Powder coating Polyester powder
Diffuser	: Tempered Clear Glass
Adjustable	: Yes
IP	: 67
Driver Type	: Built-in Driver
Input Voltage	: 220-240Vac~50Hz
Power Factor	: 0.96
Dimension (ØxH)	: 120x176 mm.

ACCESSORY



Hex Wrench

Plastic Plug

Screw


+ Installation Manual

UNIT PRICE : x,xxx.-



**NEW
PRODUCT**



DIMENSION (Unit mm.)

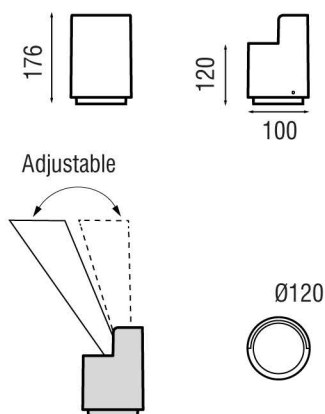

PHOTOMETRIC DATA



LC-H1285-GU10 ON GROUND

GU10
LAMP

IP67


**DIE-CAST
ALUMINIUM
MATERIAL**

**ANTHRACITE
COLOR**

SPECIFICATION

Model	: LC-H1285-GU10
Light source	: 1 x GU10
Beam Angle	: N/A
Material	: Die-cast Aluminium
Color	: Anthracite
Paint method	: Powder coating Polyester powder
Diffuser	: Tempered Clear Glass
Adjustable	: Yes
IP	: 67
Driver Type	: Built-in Driver
Input Voltage	: 220-240Vac~50Hz
Power Factor	: 0.96
Dimension (ØxH)	: 120x176 mm.

ACCESSORY



+ Installation Manual

LED REPLACEMENT




1 x GU10

Note: The lamp can be replaced with a new bulb.

UNIT PRICE : x,xxx.-

LUC 

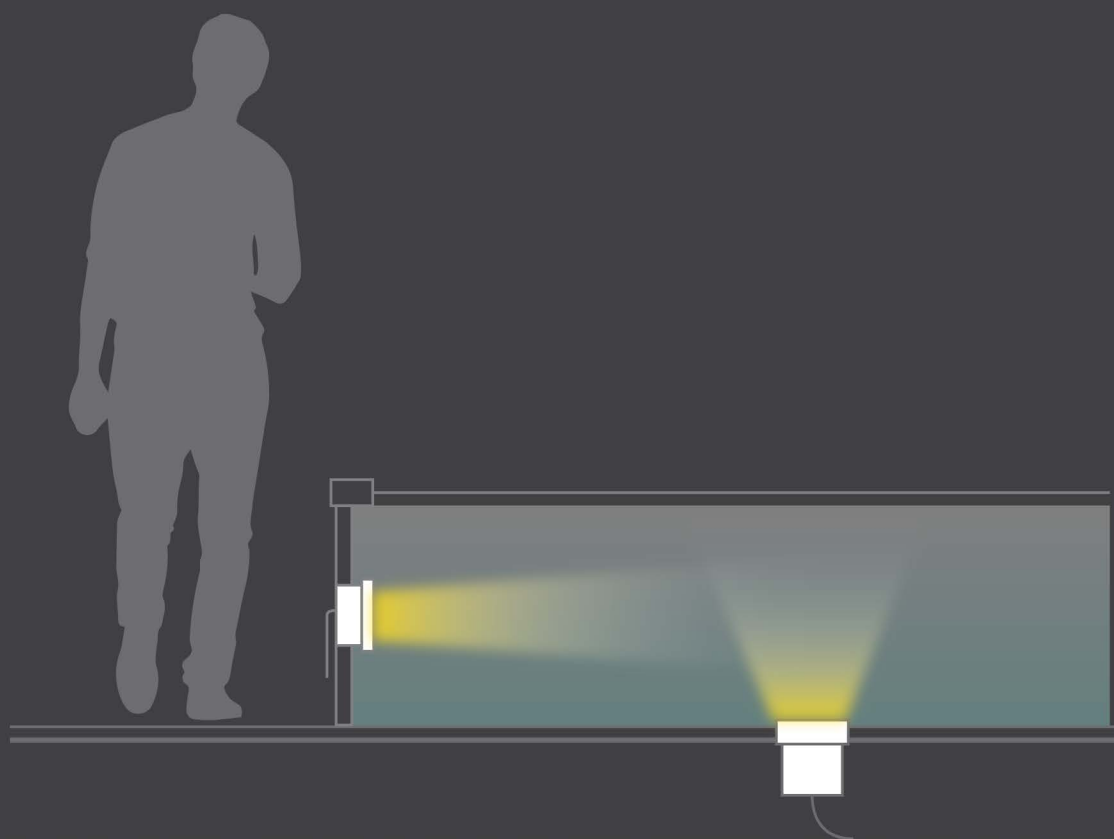

UNDERWATER LIGHT

LC-U1-7481

UNDERWATER LIGHT




LED

2.1
WATT



IP68

MARINE
GRADE 316
MATERIAL

DIMENSION (Unit mm.)



PHOTOMETRIC DATA



SPECIFICATION

Model	: LC-U1-7481
Light source	: LED Chip
Power	: 2.1W
Lumen	: 190 lm
Lumen/Watt	: 90 lm/W
CCT	: 3000K
CRI	: >80
Beam Angle	: 19°
Material	: Stainless Steel 316
Color	: Stainless Steel
Paint method	: -
Optical cover	: Molded PC lens
Adjustable	: -
IP	: 68
Driver Type	: Remote Driver
Input Voltage	: 700mA, 2.98Vdc, Uin max 50Vdc
Power factor	: >0.96
Dimension (ØxH)	: Ø42×97 mm.

ACCESSORY



LED Constant
Current Driver
700mA 4W. In IP67
GFR Polymer Box



IP68
"Series-Wiring LED"
Distribution Box
for 1-3 Luminaires.



Housing

UNIT PRICE : xx,xxx.-



LC-U1-7480 UNDERWATER LIGHT


LED

3.3
WATT



IP68

MARINE
GRADE 316
MATERIAL

DIMENSION (Unit mm.)



PHOTOMETRIC DATA



SPECIFICATION

Model	: LC-U1-7480
Light source	: LED Chip
Power	: 3.3W
Lumen	: 300 lm
Lumen/Watt	: 90 lm/W
CCT	: 3000K
CRI	: >80
Beam Angle	: 28°
Material	: Stainless Steel 316
Color	: Stainless Steel
Paint method	: -
Optical cover	: Molded PC lens
Adjustable	: -
IP	: 68
Driver Type	: Remote Driver
Input Voltage	: 12Vdc/24Vdc
Power factor	: >0.96
Dimension (ØxH)	: Ø42×97 mm.

ACCESSORY



LED Constant
Voltage Driver
12Vdc 10W. In IP67
GFR Polymer Box



IP68
"Series-Wiring LED"
Distribution Box
for 1-3 Luminaires.



Housing

UNIT PRICE : 7,800.-



LC-U1-7416

UNDERWATER LIGHT

LED


12

WATT



IP68

MARINE
GRADE 316
MATERIAL

DIMENSION (Unit mm.)

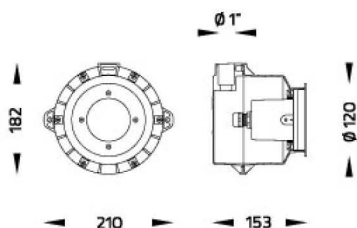

PHOTOMETRIC DATA



SPECIFICATION

Model	: LC-U1-7416
Light source	: LED Chip
Power	: 12W
Lumen	: 900 lm
Lumen/Watt	: 60 lm/W
CCT	: 3000K
CRI	: >80
Beam Angle	: 42°
Material	: Stainless Steel 316
Color	: Stainless Steel
Paint method	: -
Optical cover	: Molded PC lens
Adjustable	: -
IP	: 68
Driver Type	: Remote Driver
Input Voltage	: 24Vdc
Power factor	: >0.96
Dimension (ØxH)	: Ø120 × 153mm.

ACCESSORY



Gel-Filled IP68
Connector for
Through Wiring Cable
Diameter 6.5 - 12mm.



LED Constant Voltage
Driver 24Vdc

UNIT PRICE : 13,000.-

LC-U1-5980

UNDERWATER LIGHT



LED


2

WATT



IP68

MARINE
GRADE 316
MATERIAL

DIMENSION (Unit mm.)

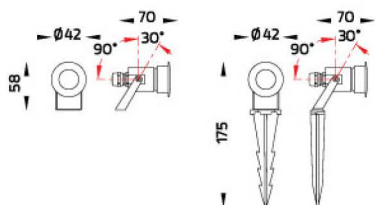

PHOTOMETRIC DATA



SPECIFICATION

Model	: LC-U1-5980
Light source	: LED Chip
Power	: 2W
Lumen	: 190 lm
Lumen/Watt	: 90 lm/W
CCT	: 3000K
CRI	: >90
Beam Angle	: 15°
Material	: Stainless Steel 316
Color	: Stainless Steel
Paint method	: -
Optical cover	: Molded PC lens
Adjustable	: -
IP	: 68
Driver Type	: Remote Driver
Input Voltage	: 700mA, 2.98Vdc, Uin max 50Vdc
Power factor	: >0.96
Dimension (ØxH)	: Ø42×97 mm.

ACCESSORY



LED Constant Current
Driver 700mA 4W.
In IP67 GFR Polymer
Box (On-Off)



IP68
"Series-Wiring LED"
Distribution Box
for 1-3Luminaires.

UNIT PRICE : xx,xxx.-

LC-U1-7417

UNDERWATER LIGHT



LED


12

WATT



IP68

MARINE
GRADE 316
MATERIAL

DIMENSION (Unit mm.)



PHOTOMETRIC DATA



SPECIFICATION

Model	: LC-U1-7417
Light source	: LED Chip
Power	: 12W
Lumen	: 900 lm
Lumen/Watt	: 60 lm/W
CCT	: 3000K
CRI	: >80
Beam Angle	: 42°
Material	: Stainless Steel 316
Color	: Stainless Steel
Paint method	: -
Optical cover	: Molded PC lens
Adjustable	: Yes
IP	: 68
Driver Type	: Remote Driver
Input Voltage	: 24Vdc
Power factor	: >0.96
Dimension (ØxH)	: Ø100×117mm.

ACCESSORY



Gel-Filled IP68
Connector for
Through Wiring Cable
Diameter 6.5 - 12mm.



LED Constant Voltage
Driver 24Vdc

UNIT PRICE : 12,000.-

LUC 



LED STRIP LIGHT

LED

4.8

WATT



IP20

LC-LED STRIP-4.8W

LED STRIP LIGHT





PHOTOMETRIC DATA



SPECIFICATION


Light source	:	3528 SMD LED
LED Quantity	:	30 pcs. LED/m.
Power	:	14.4W
Input Voltage	:	12V DC
Package	:	5m. / Reel
CRI	:	>90
Beam Angle	:	120°
CCT	:	3000K

ACCESSORY



Model : Y-A004-f Tail Aluminium Track
Pmma Opal Matte Diffuser L :1m.

DIMENSION (Unit mm.)

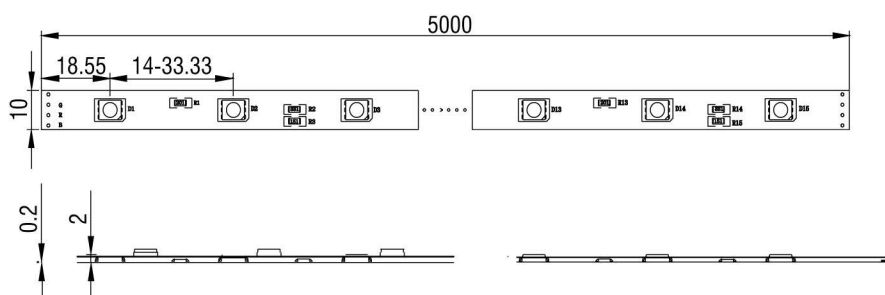

UNIT PRICE : xxxx.-

LC-LED STRIP-7.2W

LED STRIP LIGHT



LED

7.2
WATT

IP67



PHOTOMETRIC DATA



SPECIFICATION

Light source	: 5050 SMD LED
LED Quantity	: 30 pcs. LED/m.
Power	: 7.2W
Input Voltage	: 12Vdc
Package	: 5m. / Reel
CRI	: >90
Beam Angle	: 120°

ACCESSORY




MODEL : Aluminium C Track L : 1 m.



Y-A002-F Aluminium cover L : 1 m.

DIMENSION (Unit mm.)

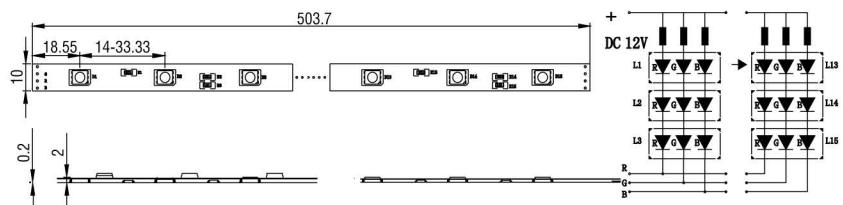

Item No.	CCT	Unit Price
LC-GL-S5050W-30	5000K - 7000K	600.-
LC-GL-S5050WW-30	2500K - 3500K	600.-
LC-GL-S5050RGB-30	RGB	800.-

UNIT PRICE : xxxx.-

LC-LED STRIP-14.4W

LED STRIP LIGHT



LED

14.4
WATT/m

IP67



PHOTOMETRIC DATA



SPECIFICATION

Light source	:	5050 SMD LED
LED Quantity	:	60 pcs. LED/m.
Power	:	14.4W
Input Voltage	:	12Vdc
Package	:	5m. / Reel
CRI	:	>90
Beam Angle	:	120°

ACCESSORY




MODEL : Aluminium C Tack L : 1 m.



Y-A002-F Aluminium cover L : 1 m.

DIMENSION (Unit mm.)

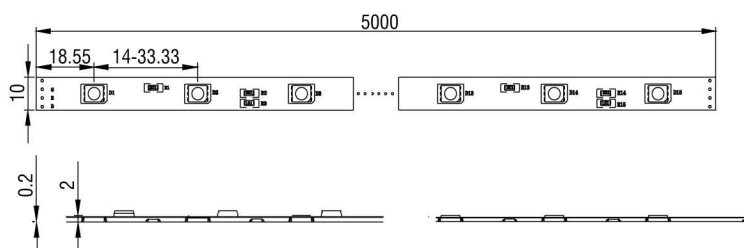

Item No.	CCT	Unit Price
LC-GL-S5050W-60	6500K	800.-
LC-GL-S5050CW-60	4000K	800.-
LC-GL-S5050WW-60	3000K	800.-
LC-GL-S5050RGB-60	RGB	1,000.-

UNIT PRICE : xxxx.-



LC-LED Neon Flex 6×12mm.

LED STRIP LIGHT


LED

WATT/m

IP67

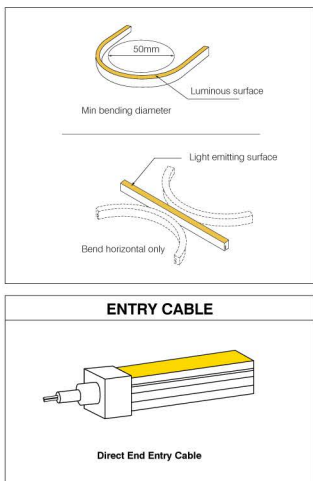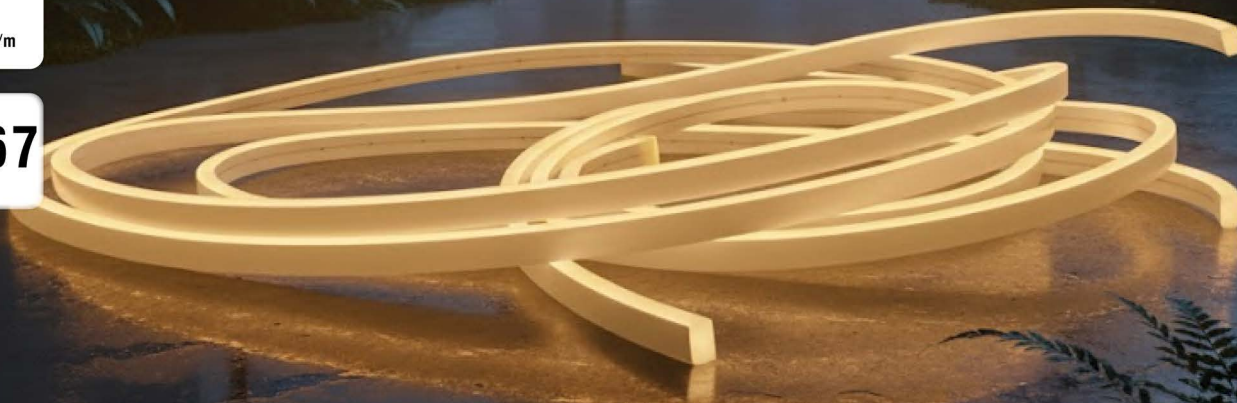

PHOTOMETRIC DATA

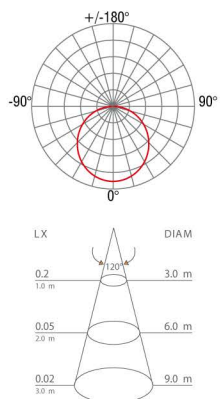

SPECIFICATION

Watt	: 6W/m.
Light source	: LED
Lumen	: 179 lm/m.
Lumen/Watt	: 29.8 lm/W
CCT	: 3000K
CRI	: >80
Beam Angle	: 120°
Material	: Silicone
IP	: 67
Driver Type	: Remote Driver
Input Voltage	: 24Vdc
Dimention (WxLxH) mm.	: 6 x 5000 x 12 mm.
Cutting (mm.)	: 50 mm.

ACCESSORY



1 x Stainless steel
rail locking clip
Snake bone L: 1m




End Cap



Cliplock

DIMENSION (Unit mm.)

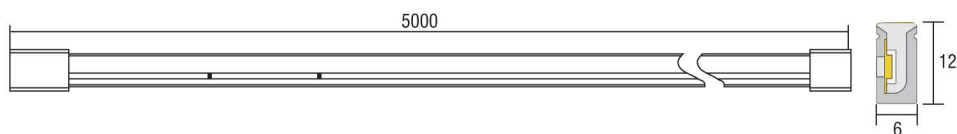

UNIT PRICE : xxxx.-

LC-LUX-N0612V24-CV N0612 SIDE VIEW



LED STRIP LIGHT

LED


10

WATT/m

IP67





PHOTOMETRIC DATA

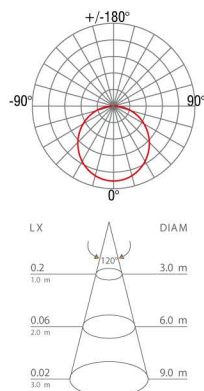

SPECIFICATION

Watt	: 10W/m.
Light source	: 2835 SMD LED
Lumen	: 299 lm/m.
Lumen/Watt	: 29.9 lm/W
CCT	: 3000K
CRI	: > 80
Beam Angle	: 120°
Material	: Silicone
IP	: 67
Driver Type	: Remote Driver
Input Voltage	: 24Vdc
Dimension (WxLxH) mm.	: 6 x 5000 x 12 mm.
Cutting (mm.)	: 50 mm.


DIMENSION (Unit mm.)

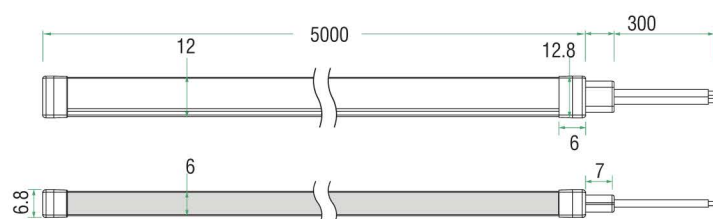

ACCESSORY




CUTTING MARK



The bottom of the led strip has transparent window, the black marker is the cutting position

UNIT PRICE : xxxx.-

LUC

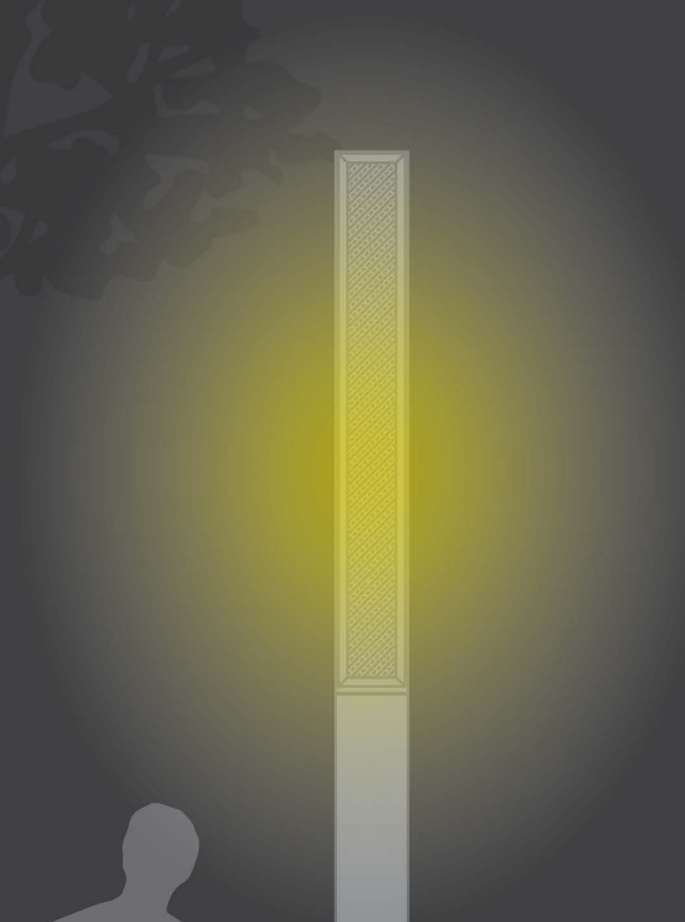


GARDEN LIGHT



SPECIAL
TYPE





DIMENSION (Unit mm.)

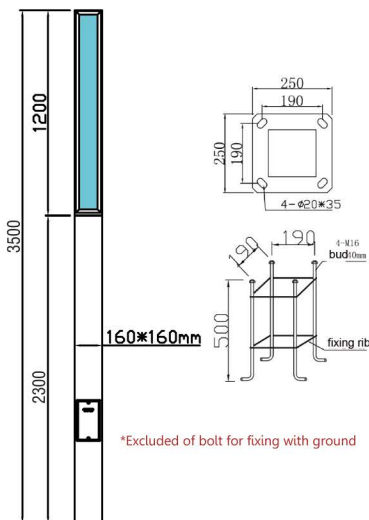

*Excluded of bolt for fixing with ground

PHOTOMETRIC DATA



OSRAM

CHIP LED

50

WATT

IP65

ALUMINIUM
MATERIAL

MATT
ANTHRACITE
COLOR

MW
MEAN WELL

DRIVER

LC-WD-T1098
WHITE OIL GLASS
GARDEN LIGHT


SPECIFICATION

Model	: LC-WD-T1098 WHITE OIL GLASS
Light source	: Osram LED
Power	: 50W
Lumen	: 6300 lm
Lumen/Watt	: 126 lm/W
CCT	: 3000K
CRI	: >80
Beam Angle	: N/A
Material	: Aluminium
Color	: Matt Anthracite (V322401S)
Paint method	: Outdoor UV Spray Powder
Optical cover	: White Oil Tempered Glass
Adjustable	: No
IP	: 65
Driver Type	: Internal Driver
Surge Protection	: 6kV
Input Voltage	: 100-240 VAC 50Hz
Power factor	: >0.96
Dimension (WxLxH)	: 160×160×3500 mm.
Total Height	: 3500 mm.



UNIT PRICE : 35,000.-



DIMENSION (Unit mm.)

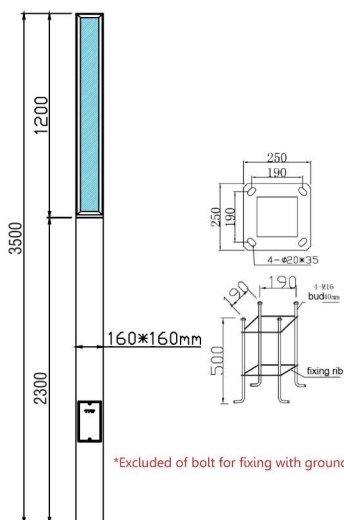

PHOTOMETRIC DATA



LC-WD-T1098-PEAR PATTERN GLASS

GARDEN LIGHT

OSRAM

CHIP LED

50

WATT

IP65

ALUMINIUM
MATERIAL

MATT
ANTHRACITE
COLOR

MW
MEAN WELL

DRIVER

SPECIFICATION

Model	: LC-WD-T1098-PEAR PATTERN GLASS
Light source	: Osram LED
Power	: 50W
Lumen	: 6300 lm
Lumen/Watt	: 126 lm/W
CCT	: 3000K
CRI	: >80
Beam Angle	: N/A
Material	: Aluminium
Color	: Matt Anthracite (V322401S)
Paint method	: Outdoor UV Spray Powder
Optical cover	: Pear Pattern glass
Adjustable	: No
IP	: 65
Driver Type	: Internal Driver
Surge Protection	: 6kV
Input Voltage	: 100-240 VAC 50Hz
Power factor	: >0.96
Dimension (WxLxH)	: 160×160×3500 mm.
Total Height	: 3500 mm.


UNIT PRICE : xx,xxx.-



ECO





DIMENSION (Unit mm.)

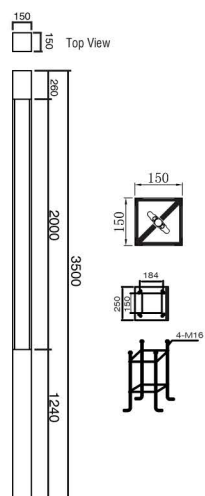

*Excluded of bolt for fixing with ground

PHOTOMETRIC DATA



LED
T5
LAMP

56
WATT

IP65

GALVANIZED
STEEL
MATERIAL

MATT
ANTHRACITE
COLOR

UV
Powder
coating

LC-WD-T1516
GARDEN LIGHT


SPECIFICATION

Model	: LC-WD-T1516
Light source	: LED T5 4×14Watt (2sides, each side 2 pcs)
Power	: 56W
Lumen	: 4×1200 lm ≈ 4800lm
Lumen/Watt	: 85 lm/W
CCT	: 3000K
CRI	: >80
Beam Angle	: N/A
Material	: Galvanized steel
Color	: Matt Anthracite (V322401S)
Paint method	: Outdoor UV Spray Powder
Optical cover	: Opal acrylic
Adjustable	: No
IP	: 65
Driver Type	: Internal Driver
Surge Protection	: 6kV
Input Voltage	: 100-240 VAC 50Hz
Power factor	: >0.5
Dimension (WxLxH)	: 150×150×3500 mm.
Total Height	: 3500 mm.

UNIT PRICE : 15,000.-





DIMENSION (Unit mm.)

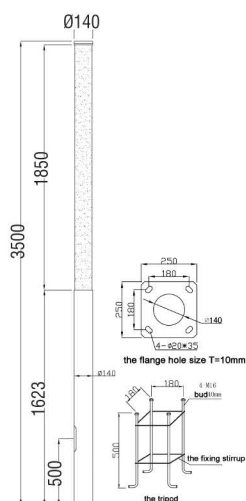

*Excluded of bolt for fixing with ground

PHOTOMETRIC DATA



LED
T5
LAMP

72
WATT

IP65

ALUMINIUM
MATERIAL

MATT
ANTHRACITE
COLOR

UV
Powder
coating

LC-WD-T124F GARDEN LIGHT


SPECIFICATION

Model	: LC-WD-T124F
Light source	: 6 x LED T5 12W
Power	: 72W
Lumen	: 6840 lm
Lumen/Watt	: 95 lm/W
CCT	: 3000K
CRI	: >80
Beam Angle	: 360°
Material	: Aluminum
Color	: Matt Anthracite (V322401S)
Paint method	: Outdoor UV Spray Powder
Optical cover	: Polycarbonate
Adjustable	: No
IP	: 65
Driver Type	: Internal Driver
Surge Protection	: 6kV
Input Voltage	: 100-240 VAC 50Hz
Power factor	: >0.5
Dimension (ØxH)	: Ø140×3500 mm.
Total Height	: 3500 mm.

UNIT PRICE : 19,800.-





DIMENSION (Unit mm.)

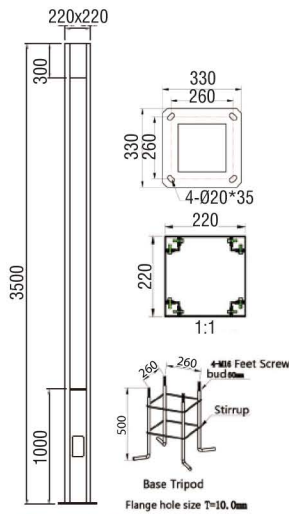


*Excluded of bolt for fixing with ground

PHOTOMETRIC DATA







DIMENSION (Unit mm.)

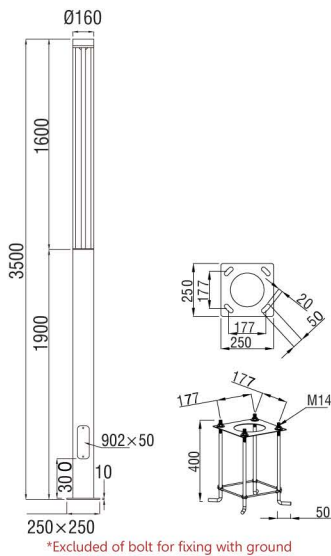

PHOTOMETRIC DATA



LC-YL-T411A

GARDEN LIGHT

CREE

CHIP LED

45

WATT

IP65

ALUMINIUM
MATERIAL

ANTHRACITE
GREY
RAL701

MW
MEAN WELL

DRIVER

SPECIFICATION

Model	: LC-YL-T411A
Light source	: CREE LED
Power	: 45W
Lumen	: 4500 lm
Lumen/Watt	: 100 lm/W
CCT	: 3000K
CRI	: >80
Beam Angle	: 180°
Material	: Aluminum
Color	: Anthracite Grey RAL7016
Paint method	: Outdoor UV Spray Powder
Optical cover	: Polycarbonate
Adjustable	: No
IP	: 65
Driver Type	: Internal Driver
Surge Protection	: 6kV
Input Voltage	: 100-240 VAC 50Hz
Power factor	: >0.96
Dimension (ØxH)	: Ø160×3500 mm.
Total Height	: 3500 mm.


UNIT PRICE : 27,500.-



DRIVER

LC-WD-T579-1
GARDEN LIGHT

*Excluded of bolt for fixing with ground



Model	: LC-WD-T579-1
Light source	: Lumileds (Philips) LED
Power	: 30W
Lumen	: 3000 lm
Lumen/Watt	: 100 lm/W
CCT	: 3000K
CRI	: > 80
Beam Angle	: 152°×72°
Material	: hot-dip galvanized pipe pole Aluminum lamp head. Exposed fastening screws, nuts is 304 stainless steel.
Color	: Matt Anthracite (V322401S)
Paint method	: Outdoor UV Spray Powder
Diffuser	: Acrylic lampshade
Adjustable	: No
IP	: 65
Driver Type	: Internal Driver
Surge Protection	: 6kV
Input Voltage	: 100-240 VAC 50Hz
Power factor	: > 0.96
Dimension (ØxH)	: Head lamp Ø160×590 mm.
Total Height	: 3500 mm.

UNIT PRICE : xx,xxx.-



UNIT PRICE : xx,xxx.-

LC-YL-HALO-1000A-021G-3m.

GARDEN LIGHT

LED
CHIP

45
WATT


IP65

ALUMINIUM
MATERIAL

MATT
ANTHRACITE
COLOR



DIMENSION (Unit mm.)

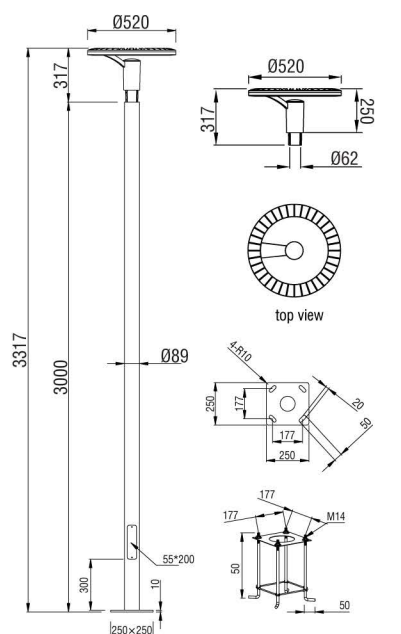

*Excluded of bolt for fixing with ground

SPECIFICATION

Model	: LC-YL-HALO-1000A-021G-3m.
Light source	: LED
Power	: 45W
Lumen	: 3325 lm
Lumen/Watt	: 73 lm/W
CCT	: 3000K
CRI	: >80
Beam Angle	: 104.19°
Material	: Die-cast Aluminium housing
Color	: Anthracite Grey RAL 7016
Paint method	: Outdoor UV Spray Powder
Optical cover	: Opal Pc lens
Adjustable	: No
IP	: 65
Driver Type	: Internal Driver
Surge Protection	: 6kV
Input Voltage	: 100-240 VAC 50Hz
Power factor	: >0.96
Dimension (Lamp Head)	: Ø520×H317 mm.
Pole Diameter	: Ø89 mm.
Total Height	: 3317 mm.

MORE INFORMATION



UNIT PRICE : xx,xxx.-



LED
CHIP

2x45
WATT


IP65

ALUMINIUM
MATERIAL

ANTHRACITE
GREY
COLOR

LC-YL-HALO-1000C
GARDEN LIGHT

DIMENSION (Unit mm.)

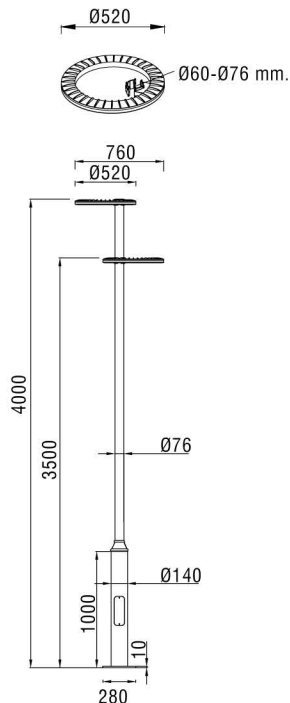

SPECIFICATION

Model	: LC-YL-HALO-1000C
Light source	: LED 2835
Power	: 2×45W
Lumen	: 2×3325 lm
Lumen/Watt	: 73 lm/W
CCT	: 3000K
CRI	: >80
Beam Angle	: 104.19°
Material	: Die-cast Aluminium housing
Color	: Anthracite Grey RAL 7016
Paint method	: Outdoor UV Spray Powder
Optical cover	: Opal Pc lens
Adjustable	: No
IP	: 65
Driver Type	: Internal Driver
Surge Protection	: 6kV
Input Voltage	: 100-240 VAC 50Hz
Power factor	: >0.96
Dimension (Lamp Head)	: Ø520
Pole Diameter	: Ø76 mm.
Total Height	: 4000 mm.

MORE INFORMATION



UNIT PRICE : xx,xxx.-



FAMILY HALO

LC-YL-LIMB-1004

GARDEN LIGHT

LED
CHIP

45
WATT

IP65


ALUMINIUM
MATERIAL

ANTHRACITE
GREY
COLOR

SPECIFICATION

Model	Power	Light source	Lumen	CCT	Materials	IP	Dimension (Head)
1004-3-P011G	60W	LED SMD 2835	3×2000lm	3000K	die-cast Aluminum and extruded Aluminium, Opal Pc lens	65	Ø50mm. W1510/E1300/H565mm.
1004-4-P011G	60W	LED SMD 2835	4×1500lm				Ø50mm. W1880/E1200×H565mm.
1004-6-P011G	90W	LED SMD 2835	6×1500lm				Ø50mm. W1780/E1500/H675mm.
1004-9-P011G	180W	LED SMD 2835	9×2000lm				Ø50mm. W2130/E1980/H790mm.
1004-11-P011G	220W	LED SMD 2835	11×2000lm				Ø50mm. W2215/E2130/H790mm.

Light source	: LED 2835
CCT	: 3000K
CRI	: >80
Material	: Die-cast Aluminium housing
Color	: Anthracite Grey RAL 7016
Paint method	: Outdoor UV Spray Powder
Optical cover	: Opal Pc lens
Adjustable	: No
IP	: 65
Driver Type	: Internal Driver
Surge Protection	: 6kV
Input Voltage	: 100-240 VAC 50Hz
Power factor	: >0.96

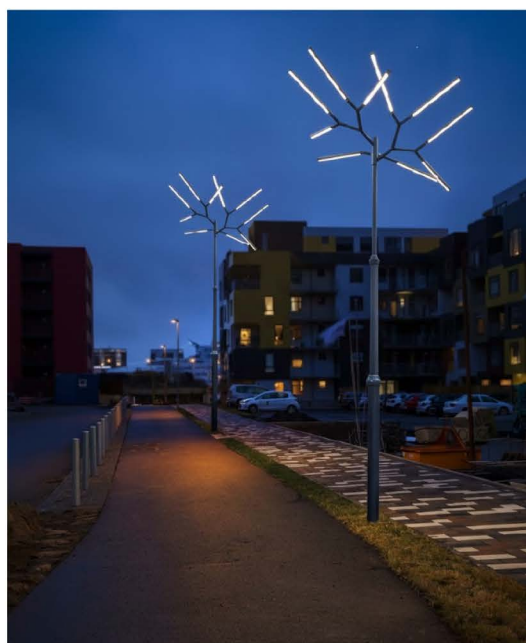

MODEL



1004-4-P011G







1004-9-P011G




1004-11-P011G

DIMENSION (Unit mm.)

(Head)

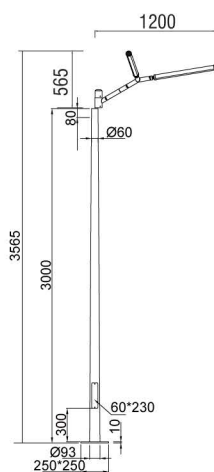






1004-4-P011G

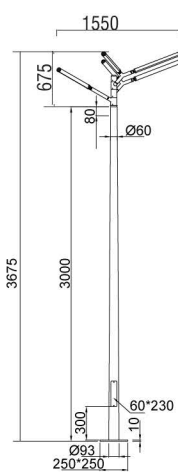

Technical drawing of the 'Lampiera' lamp showing its dimensions:

- Main height: 3790
- Arm length: 2130
- Mounting plate width: 600
- Mounting plate depth: 230
- Base diameter: Ø93
- Base height: 110
- Other dimensions shown: 790, 80, 3000, 300, 250, 250.


1004-11-P011G



*Excluded of bolt for fixing with ground

UNIT PRICE : xx,xxx.-


LUC 

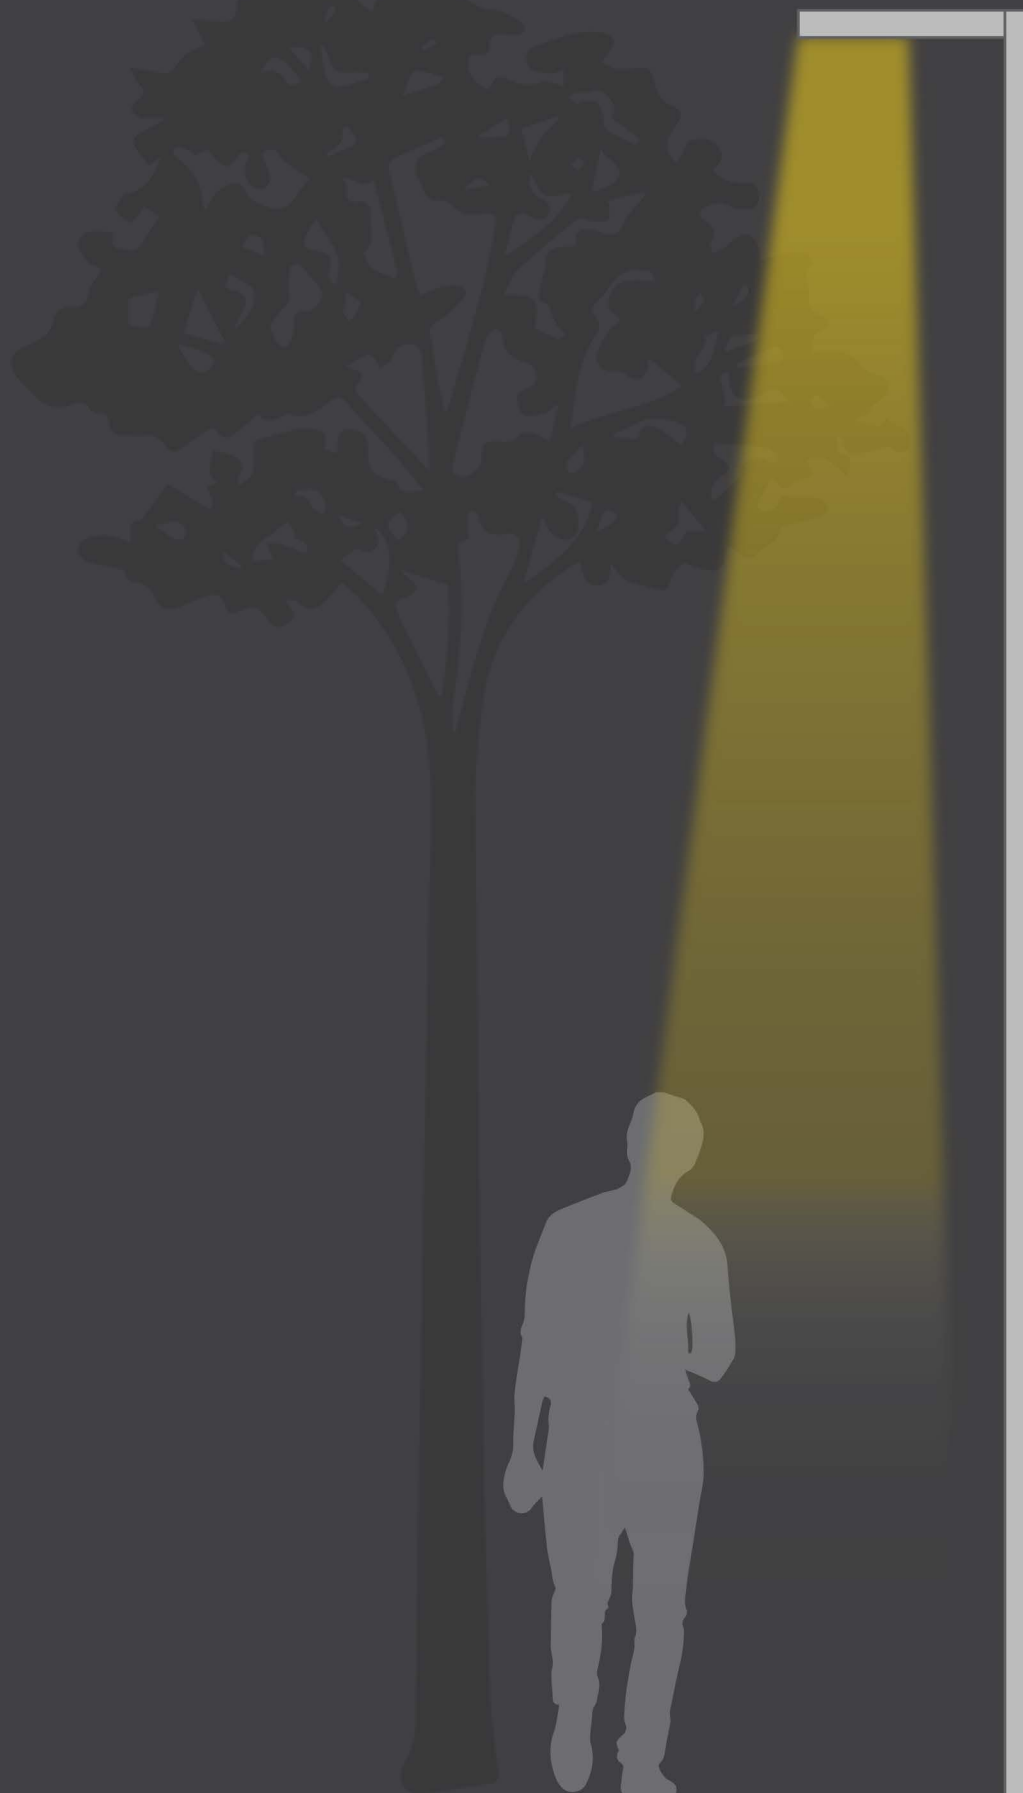


STREET LIGHT



DIMENSION (Unit mm.)

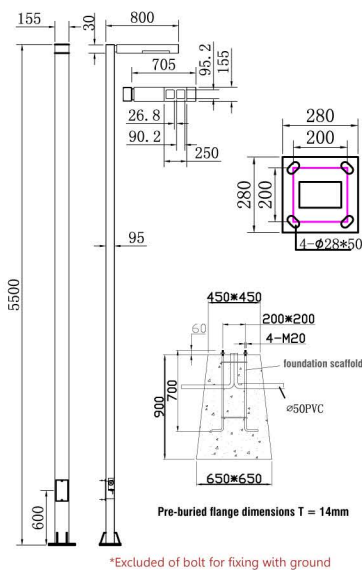

PHOTOMETRIC DATA

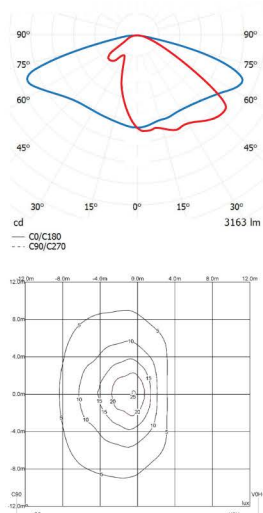

LUMILEDS

CHIP LED

60

WATT

IP65

ALUMINIUM
MATERIAL

MATT
ANTHRACITE
COLOR

MW
MEAN WELL
DRIVER

LC-WD-T135 - 1 HEAD STREET LIGHT


SPECIFICATION

Model	: LC-WD-T135 - 1 HEAD
Light source	: Lumileds (Philips) LED
Power	: 60W
Lumen	: 6960 lm
Lumen/Watt	: 116 lm/W
CCT	: 4000K
CRI	: >80
Beam Angle	: 152°x72°
Material	: Aluminium
Color	: Matt Anthracite (V322401S)
Paint method	: Outdoor UV Spray Powder
Optical cover	: Polycarbonate
Adjustable	: -
IP	: 65
Driver Type	: Internal Driver
Surge Protection	: 6kV
Input Voltage	: 100-240 VAC 50Hz
Power factor	: >0.96
Dimension (WxLxH)	: 155×800×5500 mm.
Total Height	: 5500 mm.

UNIT PRICE : 32,000.-




DIMENSION (Unit mm.)

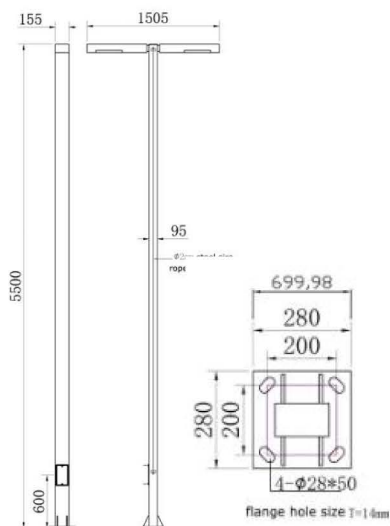

*Excluded of bolt for fixing with ground

PHOTOMETRIC DATA

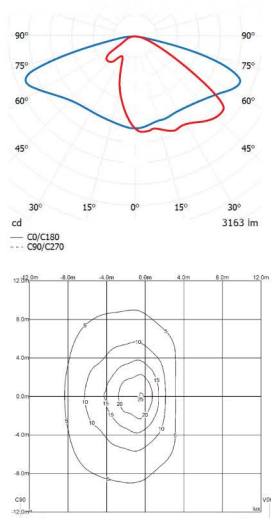

LC-WD-T135 - 2 HEAD STREET LIGHT

LUMILEDS

CHIP LED

2x60
WATT

IP65

ALUMINIUM
MATERIAL

MATT
ANTHRACITE
COLOR

MW
MEAN WELL

DRIVER


SPECIFICATION

Model	: LC-WD-T135 - 2 HEAD
Light source	: Lumileds (Philips) LED
Power	: 2×60W
Lumen	: 2×6960 lm
Lumen/Watt	: 116 lm/W
CCT	: 4000K
CRI	: >80
Beam Angle	: 152°x72°
Material	: Aluminium
Color	: Matt Anthracite (V322401S)
Paint method	: Outdoor UV Spray Powder
Optical cover	: Polycarbonate
Adjustable	: -
IP	: 65
Driver Type	: Internal Driver
Surge Protection	: 6kV
Input Voltage	: 100-240 VAC 50Hz
Power factor	: >0.96
Dimension (WxLxH)	: 155×1505×5500 mm.
Total Height	: 5500 mm.


UNIT PRICE : xx,xxx.-



Adjustable Headlamp
Reduce Back Light (Bug Rating)
Conforming To Leed

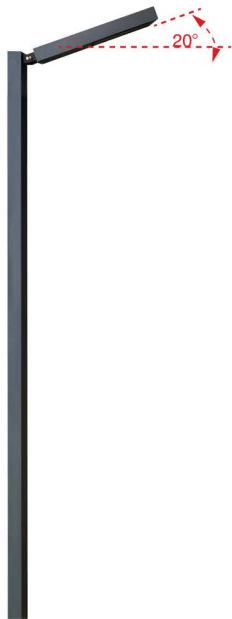


DIMENSION (Unit mm.)

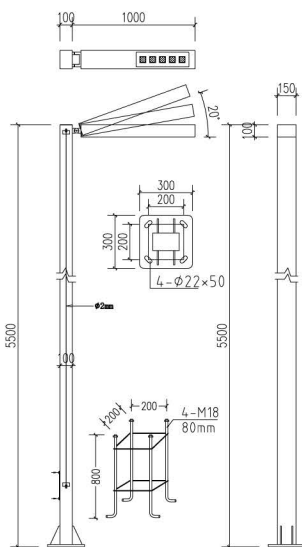

*Excluded of bolt for fixing with ground

PHOTOMETRIC DATA

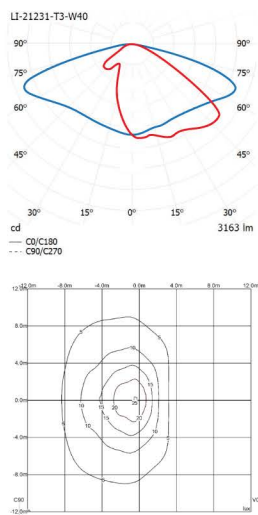

LUMILEDS

CHIP LED

60
WATT

IP65

ALUMINIUM
MATERIAL

MATT
ANTHRACITE
COLOR


MW
MEAN WELL
DRIVER

LC-WD-T135-ADJUST STREET LIGHT

SPECIFICATION

Model	: LC-WD-T135-ADJUST
Light source	: Lumileds (Philips) LED
Power	: 60W
Lumen	: 6960 lm
Lumen/Watt	: 116 lm/W
CCT	: 3000K
CRI	: >80
Beam Angle	: 152°x72°
Material	: Aluminium
Color	: Matt Anthracite (V322401S)
Paint method	: Outdoor UV Spray Powder
Optical cover	: Polycarbonate
Adjustable	: 90°-110°
IP	: 65
Driver Type	: Internal Driver
Surge Protection	: 6kV
Input Voltage	: 100-240 VAC 50Hz
Power factor	: >0.96
Dimension (WxLxH)	: 150×1100×5500 mm.
Total Height	: 5500 mm.

MORE INFORMATION

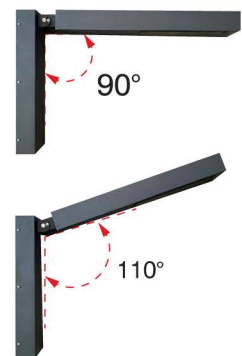


UNIT PRICE : 38,000.-



Adjustable Headlamp
Reduce Back Light (Bug Rating)
Conforming To Leed




DIMENSION (Unit mm.)

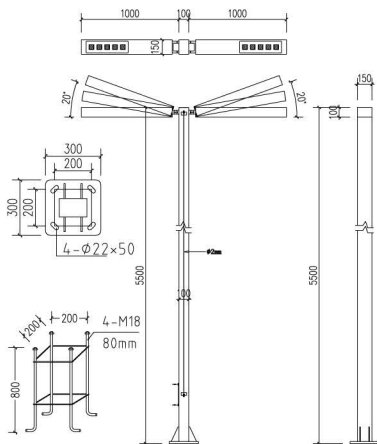

*Excluded of bolt for fixing with ground

PHOTOMETRIC DATA

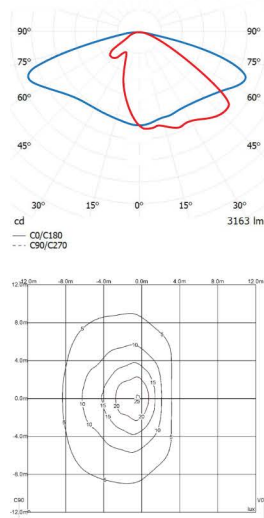

LUMILEDS

CHIP LED

2x60
WATT

IP65

ALUMINIUM
MATERIAL

MATT
ANTHRACITE
COLOR


MW
MEAN WELL
DRIVER

LC-WD-T135-ADJUST-2 STREET LIGHT

SPECIFICATION

Model	: LC-WD-T135-ADJUST - 2
Light source	: Lumileds (Philips) LED
Power	: 2×60W
Lumen	: 2×6960 lm
Lumen/Watt	: 116 lm/W
CCT	: 3000K
CRI	: >80
Beam Angle	: 152°×72°
Material	: Aluminium
Color	: Matt Anthracite (V322401S)
Paint method	: Outdoor UV Spray Powder
Optical cover	: Polycarbonate
Adjustable	: 90°-110°
IP	: 65
Driver Type	: Internal Driver
Surge Protection	: 6kV
Input Voltage	: 100-240 VAC 50Hz
Power factor	: >0.96
Dimension (WxLxH)	: 150×2100×5500 mm.
Total Height	: 5500 mm.

MORE INFORMATION



UNIT PRICE : 40,000.-



CREE
CHIP LED


45
WATT

IP66

DIE-CAST
ALUMINIUM
MATERIAL

ANTHRACITE
COLOR

DIMENSION (Unit mm.)

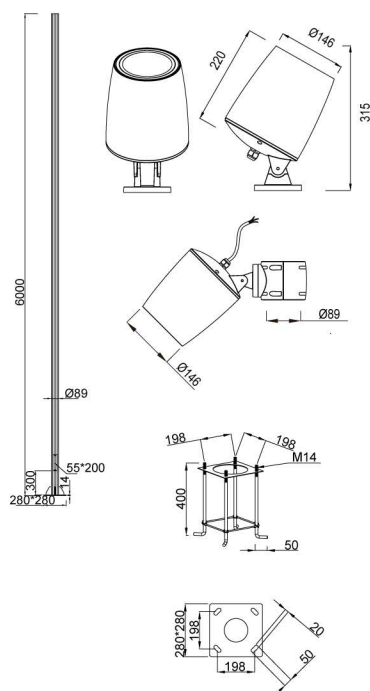

*Excluded of bolt for fixing with ground

SPECIFICATION


Model	: LC-YL-6000XL
Light source	: CREE COB LED
Power	: 45W
Lumen Lamp	: 5083 lm
Lumen Luminaire	: 3970 lm
Lumen/Lamp	: 112 lm/W
CCT	: 3000K
CRI	: >80
Beam Angle	: 60°
Material	: Die-cast Aluminum
Color	: Anthracite
Optical cover	: Clear tempered glass
Adjustable	: Yes
IP	: 66
Driver Type	: Build-in LED Driver
Input Voltage	: 110 - 240 Vac ~ 50Hz
Power factor	: ≥0.96
Dimension (ØxLxH)	: 146 x 220 x 315 mm.
Pole Height	: 6000 mm.

LC-YL-6000XL STREET LIGHT

ACCESSORY



PHOTOMETRIC DATA



LED CHIP




CXA1816-0000-000N00N430H

UNIT PRICE : XX,XXX.-



LUC E

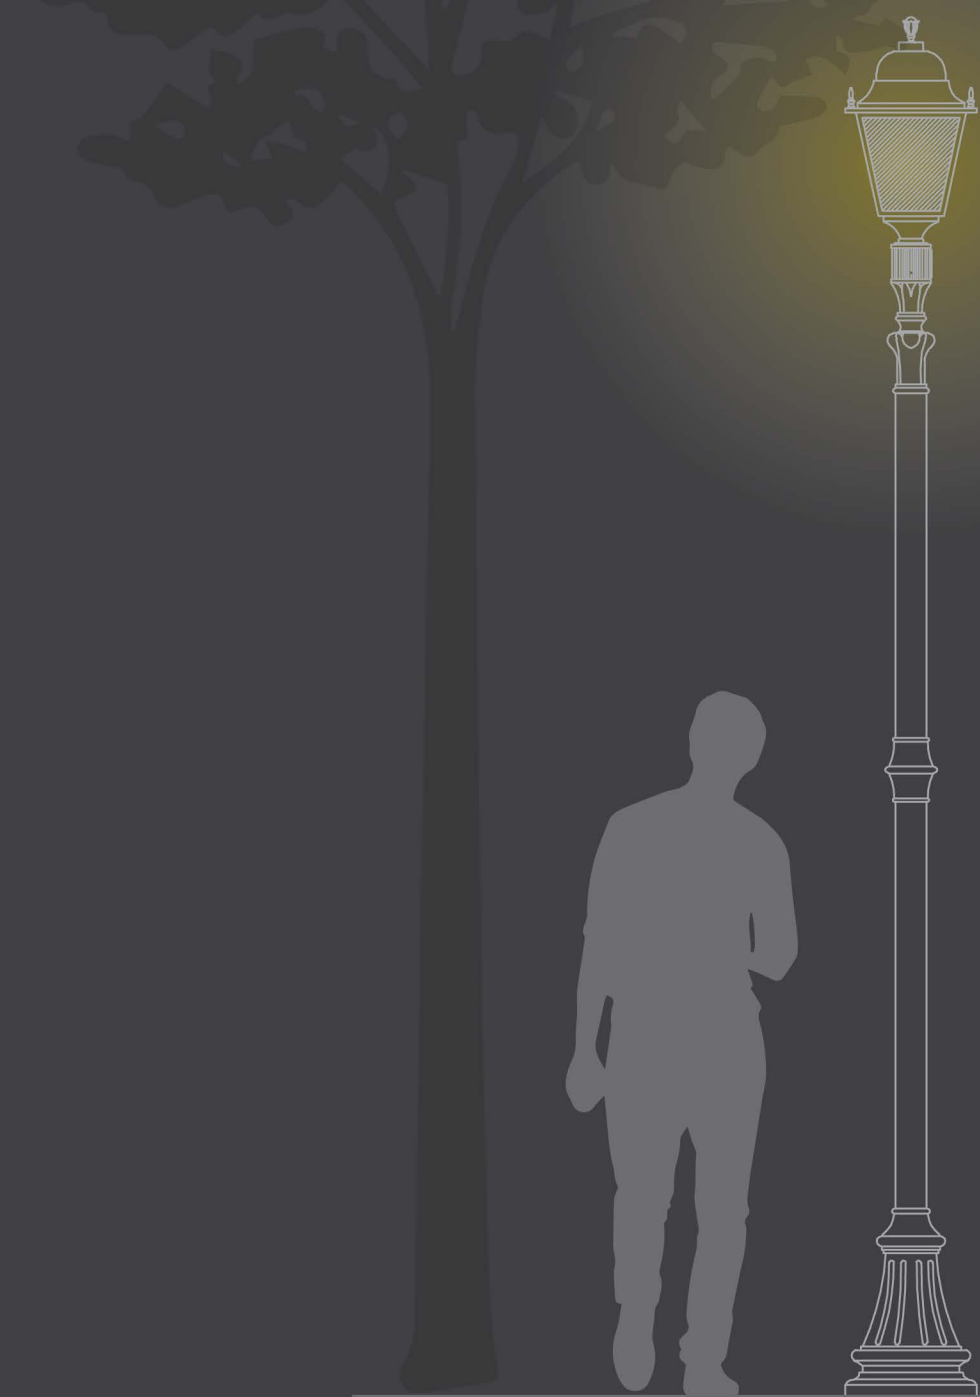


CLASSIC LAMP

LC-WD-B205

CLASSIC WALL LAMP



DIMENSION (Unit mm.)

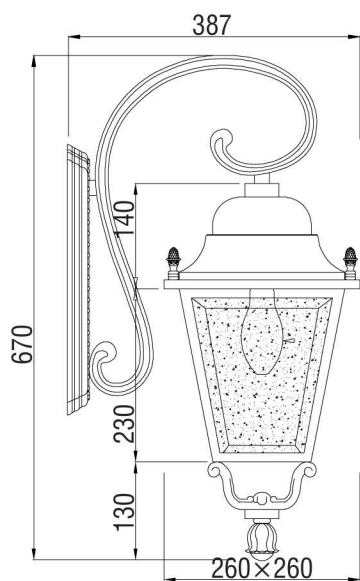

E27
LAMP

IP55

ALUMINIUM
MATERIAL

MATT
ANTHRACITE
COLOR


SPECIFICATION

Model	: LC-WD-B205
Light source	: E27 (Waterproof Socket IP65) (Max. 50W)
Material	: Aluminium
Color	: Matt Anthracite (V322401S)
Paint method	: Outdoor UV Spray Powder
Diffuser	: Tempered Glass
IP	: 55
Input Voltage	: AC220V~50Hz
Dimension (mm.)	: Head Size W260×L260×H500 mm. Total : H670mm.

UNIT PRICE : 6,600.-



DIMENSION (Unit mm.)

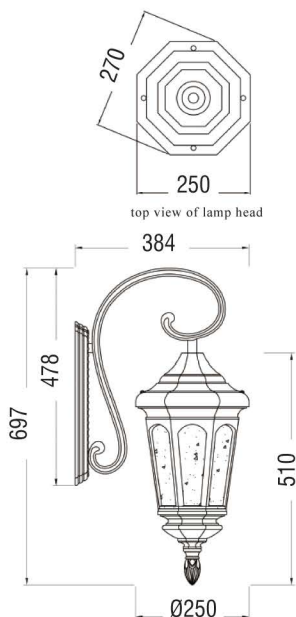

**E27
LAMP**

IP55

**ALUMINIUM
MATERIAL**

**MATT
ANTHRACITE
COLOR**

LC-WD-B551
CLASSIC WALL LAMP




SPECIFICATION

Model	: LC-WD-B551
Light source	: E27 (Waterproof Socket IP65) (Max. 50W)
Material	: Aluminium
Color	: Matt Anthracite (V322401S)
Paint method	: Outdoor UV Spray Powder
Diffuser	: Tempered Glass
IP	: 55
Input Voltage	: AC220V~50Hz
Dimension (mm.)	: Head size $\varnothing 270 \times 250 \times H510$ mm. Total : H697mm.

UNIT PRICE : 6,600.-



DIMENSION (Unit mm.)

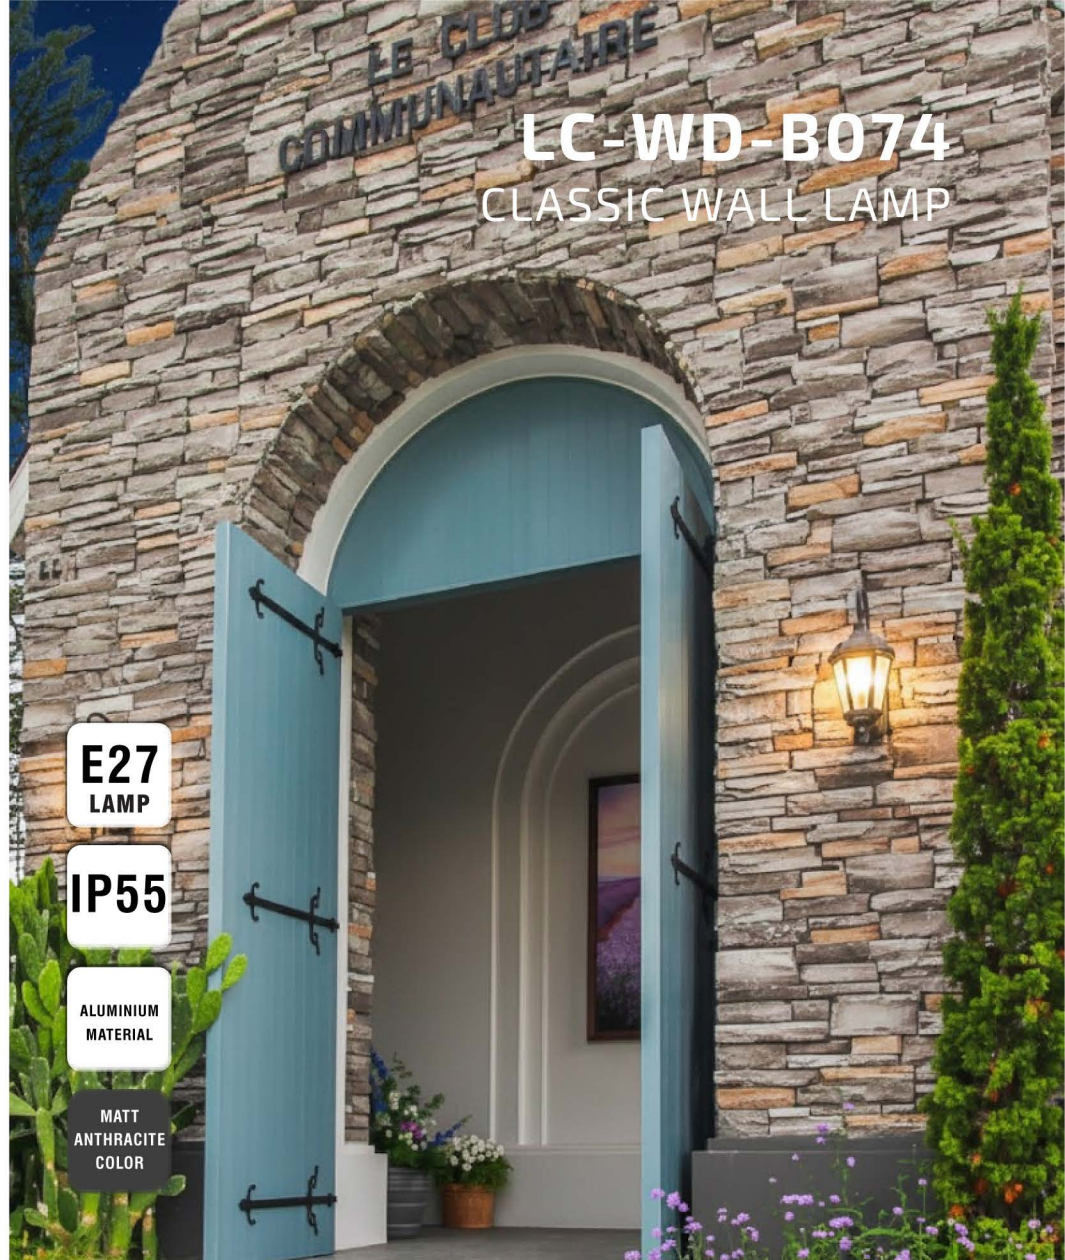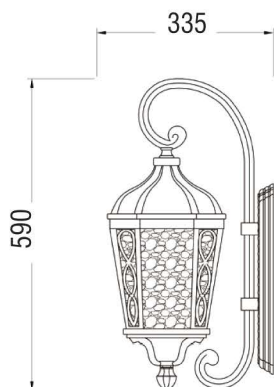

E27
LAMP

IP55

ALUMINIUM
MATERIAL

MATT
ANTHRACITE
COLOR

SPECIFICATION

Model	: LC-WD-B074
Light source	: E27 (Waterproof Socket IP65) (Max. 50W)
Material	: Aluminium
Color	: Matt Anthracite (V322401S)
Paint method	: Outdoor UV Spray Powder
Diffuser	: Tempered Water pattern glass
IP	: 55
Input Voltage	: AC220V~50Hz
Dimension (mm.)	: Head size 250×225×335mm. Total : H590 mm.

MORE INFORMATION




Water pattern glass

UNIT PRICE : xx,xxx.-



DIMENSION (Unit mm.)

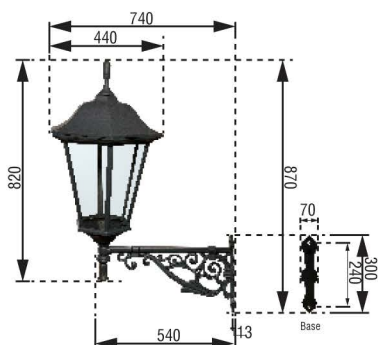

E27
LAMP

IP54

ALUMINIUM
MATERIAL

ANTHRACITE
GREY
RAL 7016

LC-YL-1023A-E27-AFW
CLASSIC WALL LAMP

SPECIFICATION

Lamp Head

Light source	: E27 (Waterproof Socket IP65) (Max. 50W)
CCT	: 3000K
Input Voltage	: AC220V~50Hz
Materials	: -Die-cast Aluminum housing -Clear Tempered glass
IP	: 54
Dimension	: Head size W440×L440×H820 mm.
Color	: Anthracite Grey RAL 7016
Paint method	: Outdoor UV Spray Powder


Arm

Arm Size	: W70×L540×H300 mm.
Base size	: W13×L70×H300 mm.
Materials	: Die-cast Aluminum housing
Color	: Anthracite Grey RAL 7016

UNIT PRICE : xx,xxx.-



DIMENSION (Unit mm.)

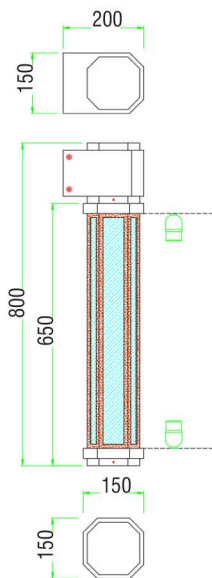

**E27
LAMP**

IP65

**STAINLESS
STEEL
MATERIAL**

**MATT
BLACK
COLOR**

**DEEP
GOLDEN
COLOUR**

LC-WD-B802 OCTAGON GARDEN LIGHT CLASSIC WALL LAMP


SPECIFICATION

Model	: LC-WD-B802 OCTAGON GARDEN LIGHT
Light source	: E27 (Waterproof Socket IP65) (Max. 50W)
Material	: 201 stainless steel lamp head, T1.5mm, transparent toughened glass. tea color tempered glass The exposed fastening screws, nuts is 304 stainless steel.
Color	: Matt black lamp body and deep golden lamp head strip.
Paint method	: Outdoor UV Spray Powder
Diffuser	: Tea color tempered glass
IP	: 65
Input Voltage	: AC220V~50Hz
Dimension (WxLxH)	: 150×200×H800 mm.

UNIT PRICE : x,xxx.-



DIMENSION (Unit mm.)

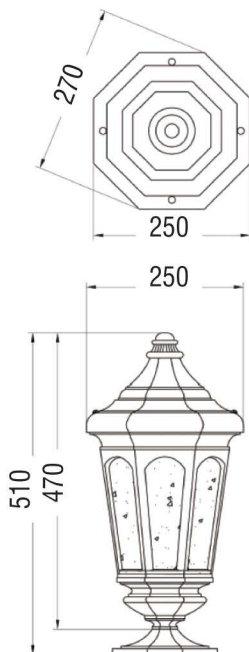

LC-WD-C551-2

CLASSIC POST TOP LAMP

E27
LAMP

IP55

ALUMINIUM
MATERIAL

MATT
ANTHRACITE
COLOR



SPECIFICATION

Model	: LC-WD-C551-2
Light source	: E27 (Waterproof Socket IP65) (Max. 50W)
Material	: Aluminium
Color	: Matt Anthracite (V322401S)
Paint method	: Outdoor UV Spray Powder
Diffuser	: Tempered Glass
IP	: 55
Input Voltage	: AC220V~50Hz
Dimension (mm.)	: Lamp head Ø270×250 × H510 mm.

UNIT PRICE : 7,000.-



DIMENSION (Unit mm.)

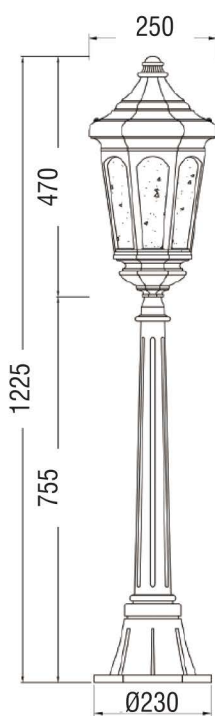

top view of lamp head

LC-WD-C551


CLASSIC BOLLARD LAMP

E27
LAMP

IP55

ALUMINIUM
MATERIAL

MATT
ANTHRACITE
COLOR

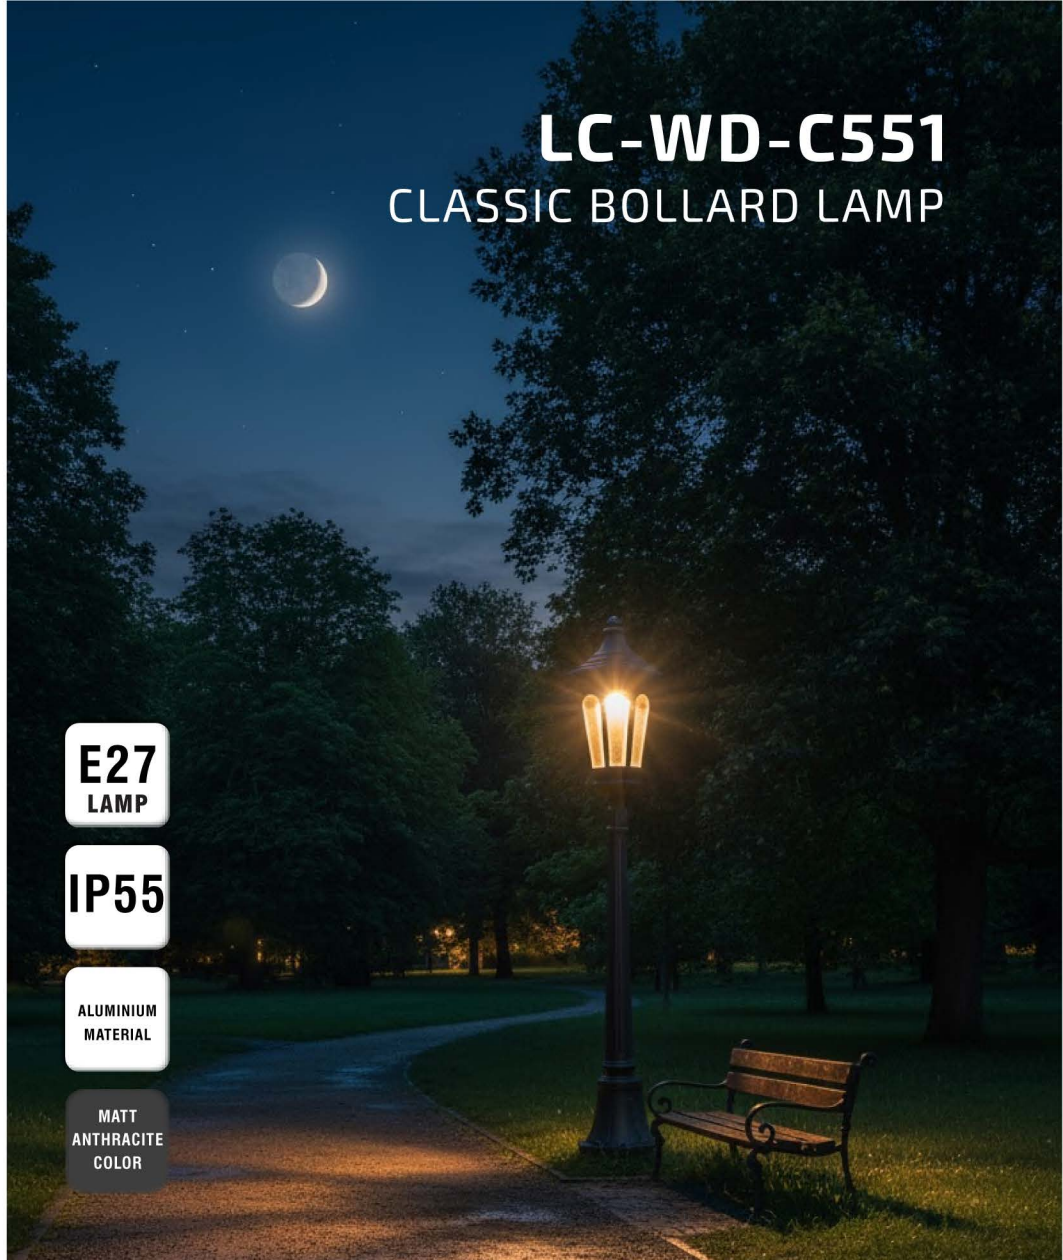



SPECIFICATION

Model	: LC-WD-C551
Light source	: E27 (Waterproof Socket IP65) (Max. 50W)
Material	: Aluminium
Color	: Matt Anthracite (V322401S)
Paint method	: Outdoor UV Spray Powder
Diffuser	: Tempered Glass
IP	: 55
Input Voltage	: AC220V~50Hz
Dimension (mm.)	: Lamp head Ø270x250xH470 mm. lamp pole H755mm, Total : H 1225 mm.

UNIT PRICE : 7,500.-



DIMENSION (Unit mm.)

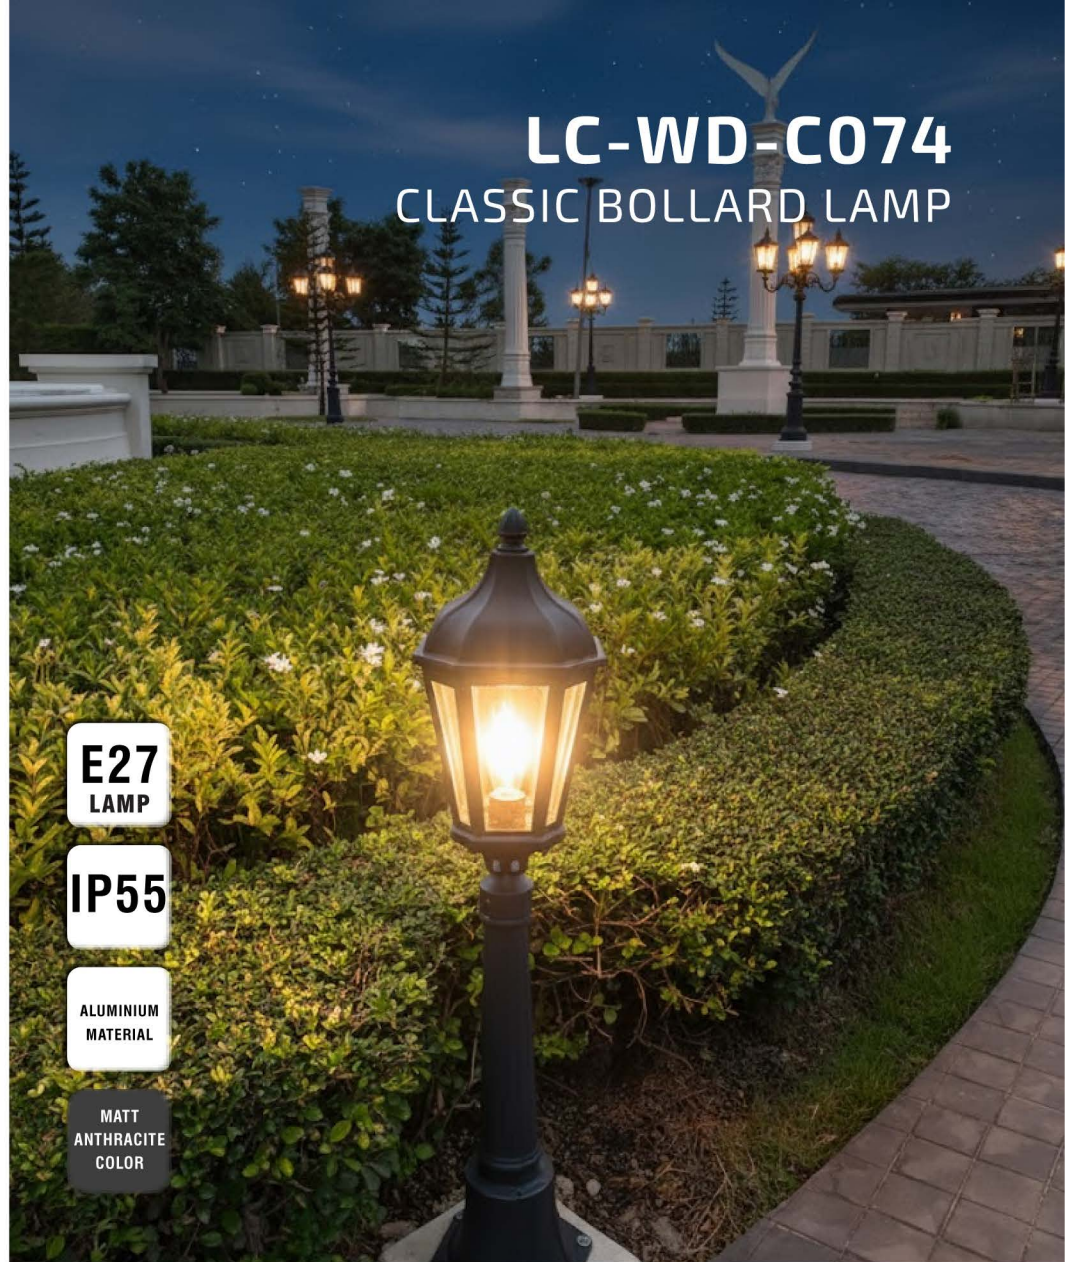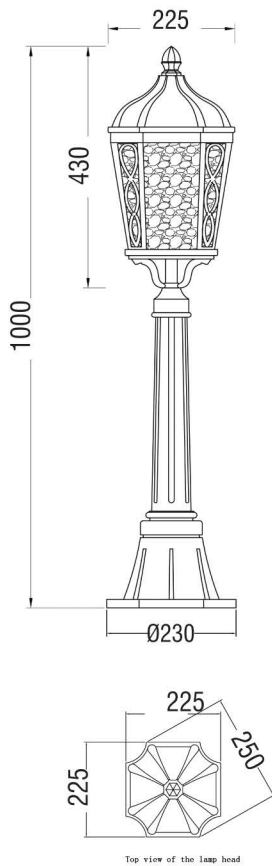

E27
LAMP

IP55

ALUMINIUM
MATERIAL

MATT
ANTHRACITE
COLOR

SPECIFICATION

Model	: LC-WD-C074
Light source	: E27 (Waterproof Socket IP65) (Max. 50W)
Material	: Aluminium
Color	: Matt Anthracite (V322401S)
Paint method	: Outdoor UV Spray Powder
Diffuser	: Tempered Water pattern glass
IP	: 55
Input Voltage	: AC220V~50Hz
Dimension (mm.)	: Lamp head $\varnothing 250 \times 250 \times H430$ mm. Total : H1000 mm.

MORE INFORMATION




Water pattern glass

UNIT PRICE : x,xxx.-



DIMENSION (Unit mm.)

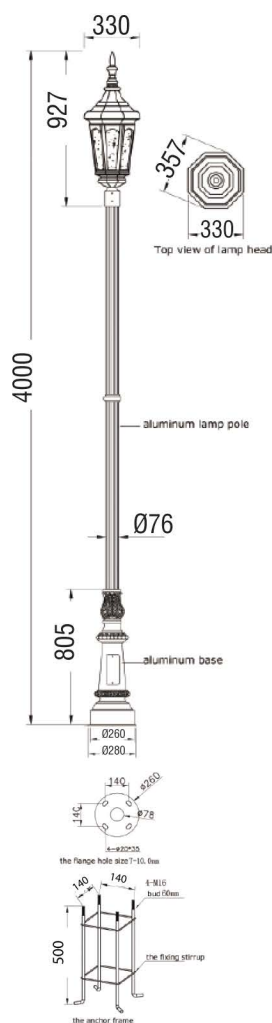

Excluded of bolt for fixing with ground

LC-WD-T551-H4000 mm. CLASSIC POST LAMP

**E27
LAMP**

IP55

**ALUMINIUM
MATERIAL**

**MATT
ANTHRACITE
COLOR**




SPECIFICATION

Model	: LC-WD-T551-H4000 mm.
Light source	: E27 (Waterproof Socket IP65) (Max. 50W)
Material	: Aluminium
Color	: Matt Anthracite (V322401S)
Paint method	: Outdoor UV Spray Powder
Diffuser	: Tempered glass
IP	: 55
Input Voltage	: AC220V~50Hz
Dimension (mm.)	: Lamp head 330 × 357 × 927 mm. Total H4000 mm., Pole Ø76 mm.


UNIT PRICE : x,xxx.-



DIMENSION (Unit mm.)

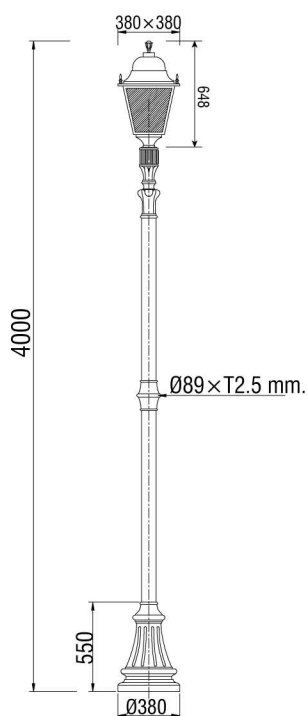

****Excluded of bolt for fixing with ground****

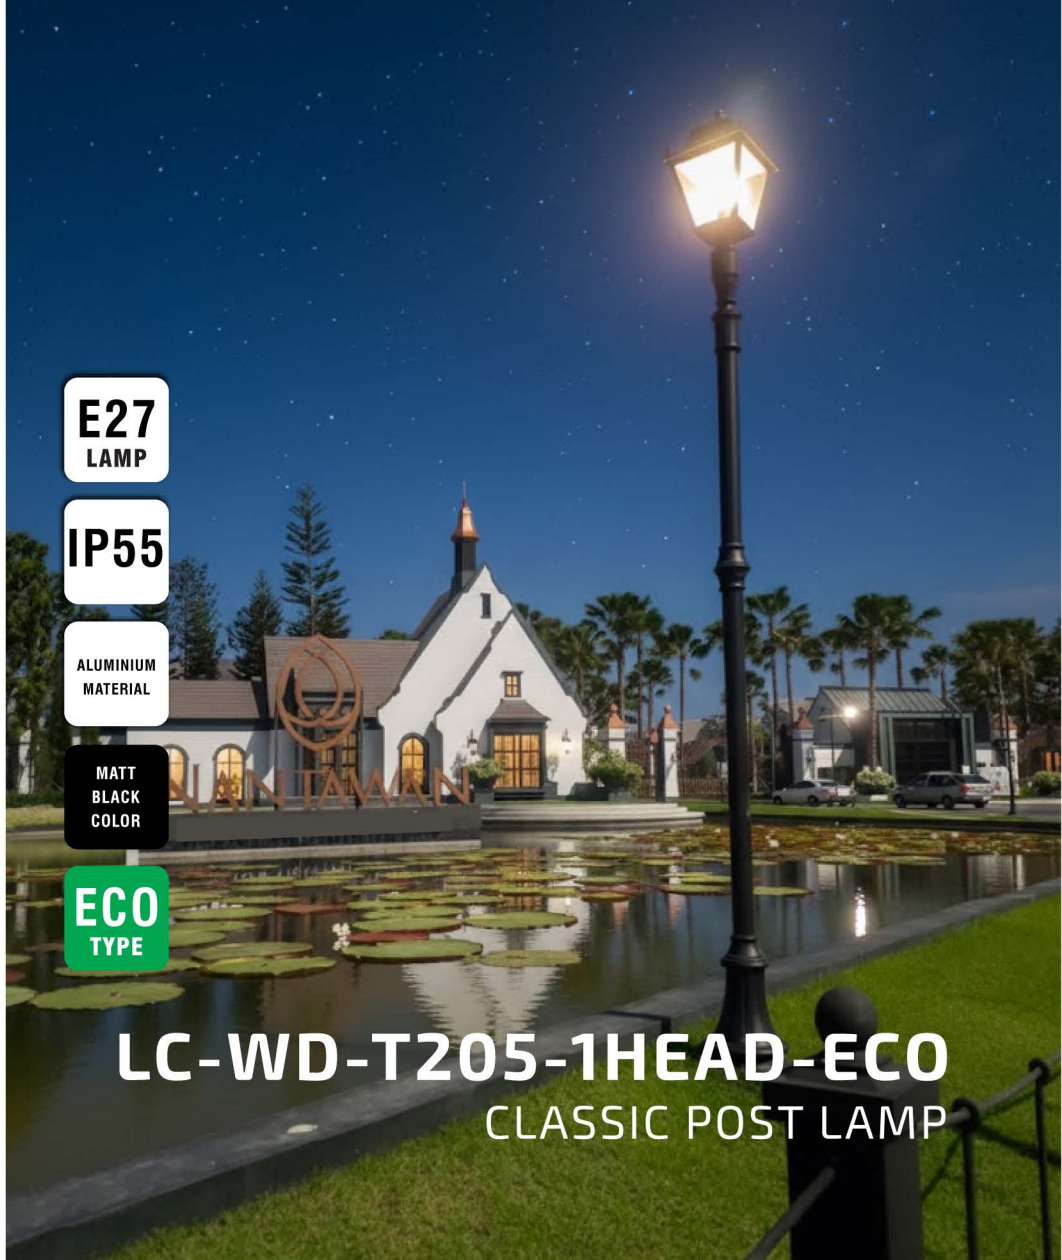

**E27
LAMP**

IP55

**ALUMINIUM
MATERIAL**

**MATT
BLACK
COLOR**

**ECO
TYPE**

LC-WD-T205-1HEAD-ECO CLASSIC POST LAMP


SPECIFICATION

Model	: LC-WD-T205-1HEAD-ECO
Light source	: E27 (Waterproof Socket IP65) (Max. 50W)
Material	: Galvanized steel lamp head cover - Galvanized steel lamp frame - Die-casting aluminum base The exposed fastening screws, nuts is 304 stainless steel.
Color	: Matt Black
Paint method	: Outdoor UV Spray Powder
Diffuser	: Tempered glass
IP	: 55
Input Voltage	: AC220V~50Hz
Dimension (mm.)	: Lamp head 380 × 380 × 648 mm. Total H4000 mm. ,Pole Ø89 × T2.5 mm.

UNIT PRICE : 25,000.-



DIMENSION (Unit mm.)

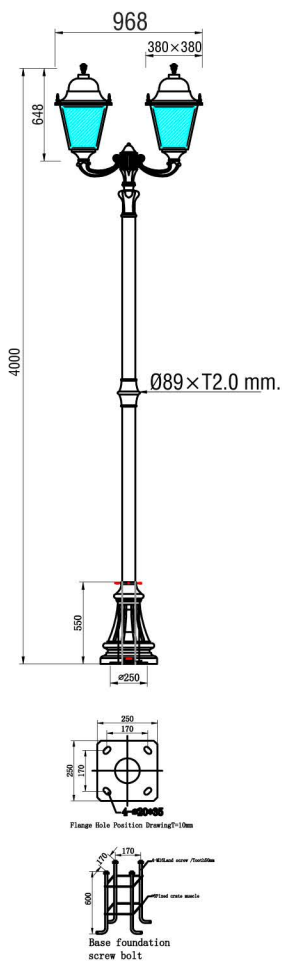

****Excluded of bolt for fixing with ground****

**2xE27
LAMP**

IP55

**ALUMINIUM
MATERIAL**

**MATT
BLACK
COLOR**

**ECO
TYPE**

LC-WD-T205-2HEAD-ECO CLASSIC POST LAMP


SPECIFICATION

Model	: LC-WD-T205-2HEAD-ECO
Light source	: 2xE27 (Waterproof Socket IP65) (Max. 50W)
Material	: Galvanized steel lamp head cover - Galvanized steel lamp frame - Die-casting aluminum base The exposed fastening screws, nuts is 304 stainless steel.
Color	: Matt Black
Paint method	: Outdoor UV Spray Powder
Diffuser	: Tempered glass
IP	: 55
Input Voltage	: AC220V~50Hz
Size Head (WxLxH)	: 380 × 968 × H648 mm.
Size Pole	: Total H4000 mm. Pole Ø89×T2.0 mm.

UNIT PRICE : 30,000.-



DIMENSION (Unit mm.)

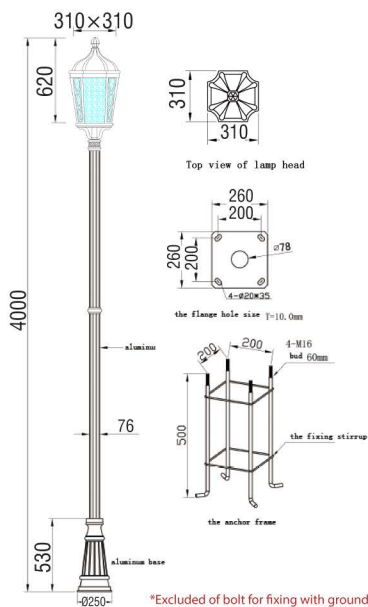

**E27
LAMP**

IP55

**ALUMINIUM
MATERIAL**

**MATT
ANTHRACITE
COLOR**

SPECIFICATION

Model	: LC-WD-T074
Light source	: E27 (Waterproof Socket IP65) (Max. 50W)
Material	: Aluminium
Color	: Matt Anthracite (V322401S)
Paint method	: Outdoor UV Spray Powder
Diffuser	: Tempered Water pattern glass
IP	: 55
Input Voltage	: AC220V~50Hz
Dimension (mm.)	: Head Size : 310 × 310 × H620mm. Total : H4000mm., Pole Ø76mm.

MORE INFORMATION




Water pattern glass

UNIT PRICE : 25,000.-



DIMENSION (Unit mm.)

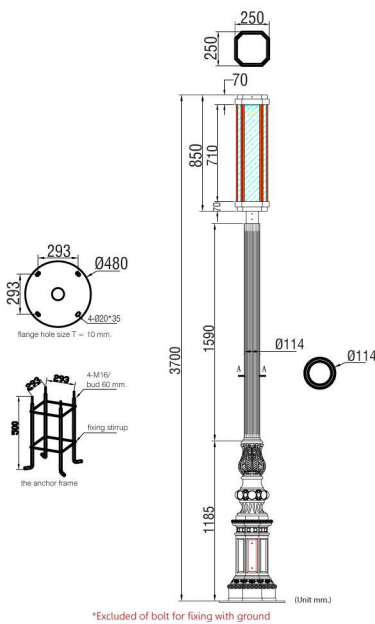

LED

30
WATT

IP65

STAINLESS
STEEL
MATERIAL

MATT
BLACK
COLOR

DEEP
GOLDEN
COLOUR

LC-WD-T800 OCTAGON GARDEN LIGHT CLASSIC POST LAMP


SPECIFICATION

Model	: LC-WD-T800 OCTAGON GARDEN LIGHT
Light source	: LED
LED Power	: 30W
CCT	: 3000K
Material	: striped aluminum lamp pole tube, cast aluminum decorative base, 201 stainless steel lamp head, tea color transparent toughened glass. the installation flange is galvanizes steel plate T10mm. The exposed fastening screws, nuts is 304 stainless steel.
Color	: Bright black and deep golden strip F8820
Paint method	: Outdoor UV Spray Powder Anti-rotten/acid.alkali.thickness $\geq 80\mu\text{m}$,
Diffuser	: Tea color tempered glass T3mm.
IP	: 65
Driver Type	: -
Input Voltage	: AC220V~50Hz
Dimension (mm.)	: Head Size : 250 × 250 × H850 mm. Total : H3700, Pole $\varnothing 114$ mm.

UNIT PRICE : xx,xxx.-



DIMENSION (Unit mm.)

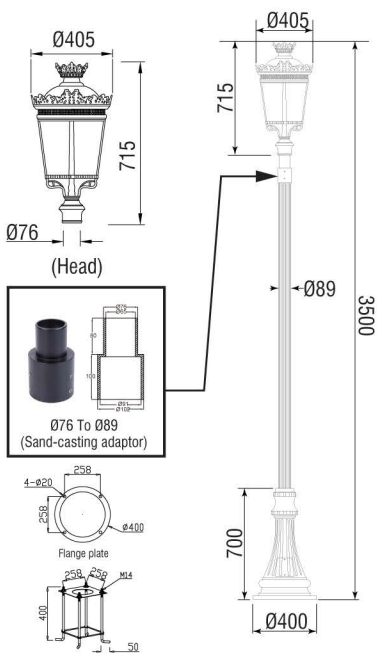

****Excluded of bolt for fixing with ground****

**E27
LAMP**

IP54

**DIE CASTING
ALUMINIUM
MATERIAL**

**ANTHRACITE
GREY
RAL 7016**

LC-YL-1011-E27-1-P053

CLASSIC POST LAMP


SPECIFICATION

Model	: LC-YL-1011-E27-1-P053
Light source	: E27 (socket IP65) (Max. 50W)
Material (Head)	: Die-cast Aluminum housing Spinning Aluminum Top Cover Frost PC lens
Color	: Anthracite Grey RAL 7016
Paint method	: Outdoor UV spray powder,
Optical cover	: Frost PC
IP	: 54
Input Voltage	: AC220V~50Hz
Material (Base and Pole)	: Sanding cast base and Extruded Alumium Pole
Dimension (mm.)	: Head Size : $\varnothing 405 \times H715$ mm. Total : H 3500 mm., Pole $\varnothing 89$ mm.

UNIT PRICE : xx,xxx.-



DIMENSION (Unit mm.)

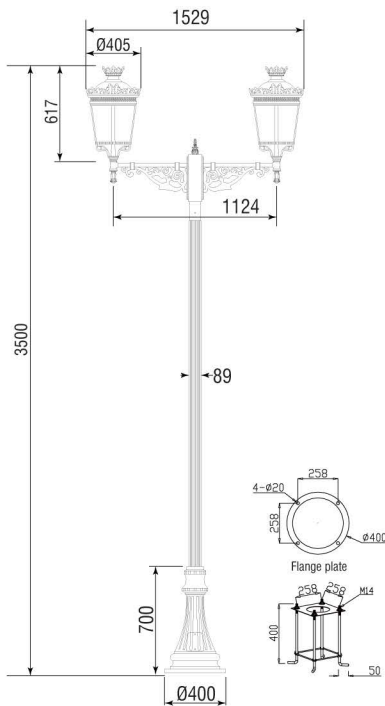

Excluded of bolt for fixing with ground

LC-YL-1011-E27-2-P053-AFW

CLASSIC POST LAMP

**2xE27
LAMP**

IP54

**DIE CASTING
ALUMINIUM
MATERIAL**

**ANTHRACITE
GREY
RAL 7016**

SPECIFICATION

Model	: LC-1011-E27-2-P053-AFW
Light source	: E27 (Waterproof Socket IP65) (Max. 50W)
Material (Head)	: Die-cast Aluminum housing Spinning Aluminum Top Cover Frost PC lens
Color	: Anthracite Grey RAL 7016
Paint method	: Outdoor UV Spray Powder
Diffuser	: Frost PC
IP	: 54
Input Voltage	: AC220V~50Hz
Material (Base and Pole)	: Sanding cast base and Extruded Alumium Pole
Dimension (mm.)	: Head Size : Ø405×H617 mm. Total : H 3500 mm., Pole Ø89 mm.


UNIT PRICE : xx,xxx.-

LC-YL-1023A-E27-1-P053


CLASSIC POST LAMP



DIMENSION (Unit mm.)

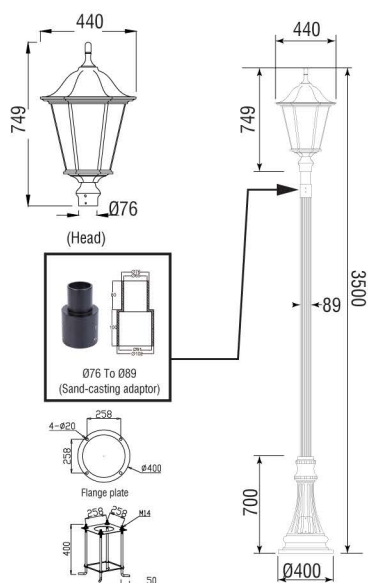

Excluded of bolt for fixing with ground

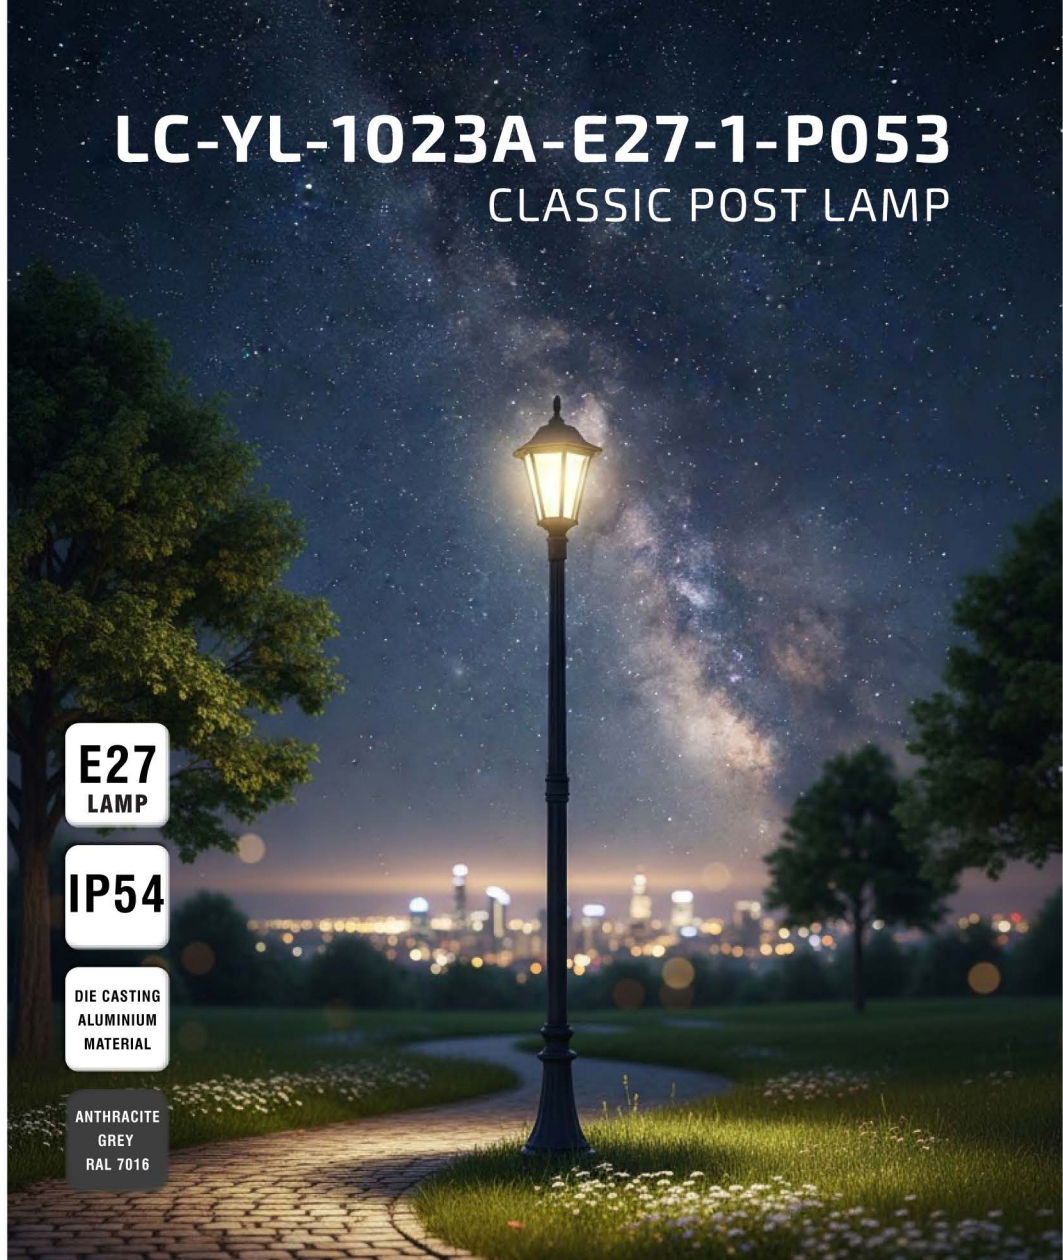

E27
LAMP

IP54

DIE CASTING
ALUMINIUM
MATERIAL

ANTHRACITE
GREY
RAL 7016


SPECIFICATION

Model	: LC-YL-1023A-E27-1-P053
Light source	: E27 (Waterproof Socket IP65) (Max. 50W)
Material (Head)	: Die-cast Aluminum
Color	: Anthracite Grey RAL 7016
Paint method	: Outdoor UV Spray Powder
Diffuser	: Clear Tempered glass
IP	: 54
Input Voltage	: -AC220V~50Hz
Material (Base and Pole)	: Sanding cast base and Extruded Aluminium Pole
Dimension (mm.)	: Head Size : Ø440×H749 mm. Total : H 3500 mm., Pole Ø89 mm.

UNIT PRICE : xx,xxx.-



DIMENSION (Unit mm.)

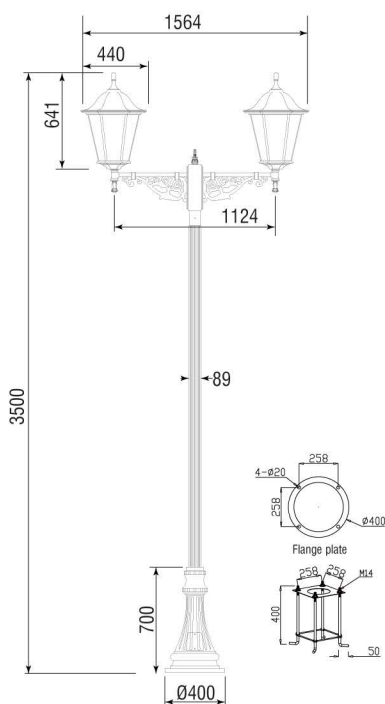

****Excluded of bolt for fixing with ground****

LC-YL-1023A-E27-2-P053-AFW

CLASSIC POST LAMP

**2xE27
LAMP**

IP54

**DIE CASTING
ALUMINIUM
MATERIAL**

**ANTHRACITE
GREY
RAL 7016**

SPECIFICATION

Model	: LC-YL-1023A-E27-2-P053-AFW
Light source	: 2×E27 (Waterproof Socket IP65) (Max. 50W)
Material (Head)	: Die-cast Aluminum
Color	: Anthracite Grey RAL 7016
Paint method	: Outdoor UV Spray Powder
Diffuser	: Clear Tempered glass
IP	: 54
Input Voltage	: AC220V~50Hz
Material (Base and Pole)	: Sanding cast base and Extruded Alumium Pole
Dimension (mm.)	: Head Size : Ø440×H641 mm. Total : H 3500 mm., Pole Ø89 mm.

UNIT PRICE : xx,xxx.-



กรมไฟฟ้าพลัง
Ministry Electricity Authority
Test Report


Electrical Equipment Testing Division
Research and Development Department
Ministry Electricity Authority




Beveling flat edge
Clear Tempered Glass
(กระจกใสขอบเอียง)



DIMENSION (Unit mm.)

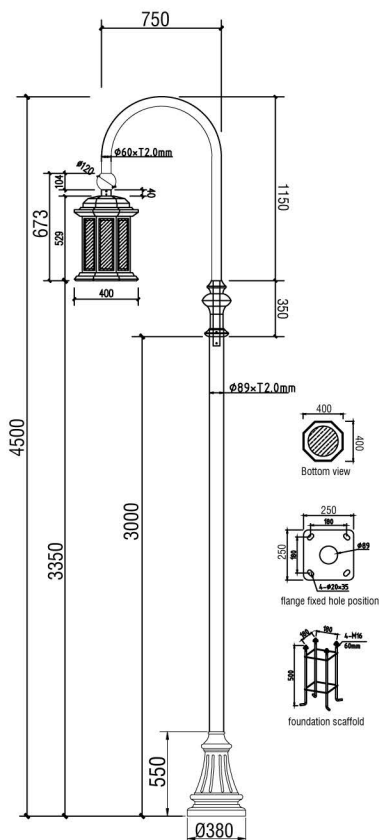

Excluded of bolt for fixing with ground



Special design
Diffusing Glass lens

LC-WD-T206-1D+T205 base

CLASSIC POST LAMP

E27
LAMP

IP55

GALVANIZED
STEEL
MATERIAL

MATT
BLACK
COLOR

SPECIFICATION

Model	: LC-WD-T206-1D+T205 Base
Light source	: 1×E27 (Waterproof Socket IP65) (Max. 50W)
Material	: The lamp holder is galvanized steel, Decoration parts aluminum products Lamp pole for galvanized steel pipe There is a reflector inside lamp head cover All fasteners screws, nuts are 304 stainless steel (exposed)
Color	: Matt Black
Paint method	: Outdoor UV Spray Powder
Diffuser	: Beveling Flat Edge Clear Tempered Glass
IP	: 55
Input Voltage	: AC220V~50Hz
Dimension (mm.)	: Head Size : W400×L400×H529 mm. With ball H673 mm. Total H4500 mm., Pole Ø89 × T2.0 mm.

UNIT PRICE : 22,000.-



Test Report


Electrical Engineering Testing Division
Research and Development Department
Ministry of Natural Resources and Environment




Beveling flat edge
Clear Tempered Glass
(กระจกใสขอบเอียง)



DIMENSION (Unit mm.)

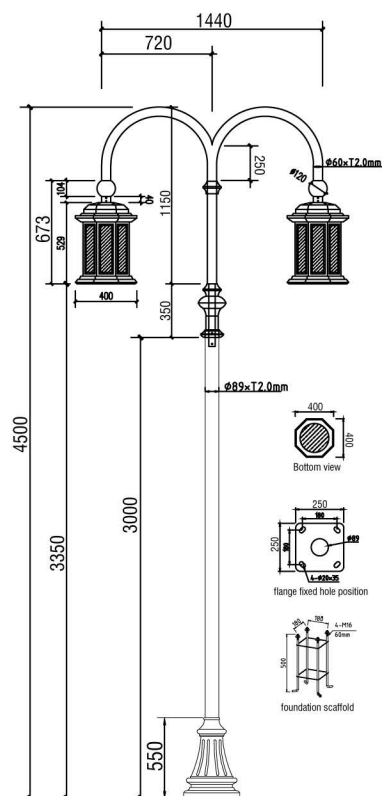

Excluded of bolt for fixing with ground



Special design
Diffusing Glass lens

LC-WD-T206-1D+T205 base CLASSIC POST LAMP

2xE27
LAMP

IP55

GALVANIZED
STEEL
MATERIAL

MATT
BLACK
COLOR


SPECIFICATION

Model	: LC-WD-T206-1D+T205 base
Light source	: 2 × E27 (Waterproof Socket IP65) (Max. 50W)
Material	: The lamp holder is galvanized steel, decoration parts aluminum products Lamp pole for galvanized steel pipe There is a reflector inside lamp head cover All fasteners screws, nuts are 304 stainless steel (exposed)
Color	: Matt Black
Paint method	: Outdoor UV Spray Powder
Diffuser	: Beveling Flat Edge Clear Tempered Glass
IP	: 55
Input Voltage	: AC220V~50Hz
Dimension (mm.)	: Head Size : L400×H529 mm. With ball H673 mm. Total H : 4500 mm.

UNIT PRICE : 40,000.-



DIMENSION (Unit mm.)

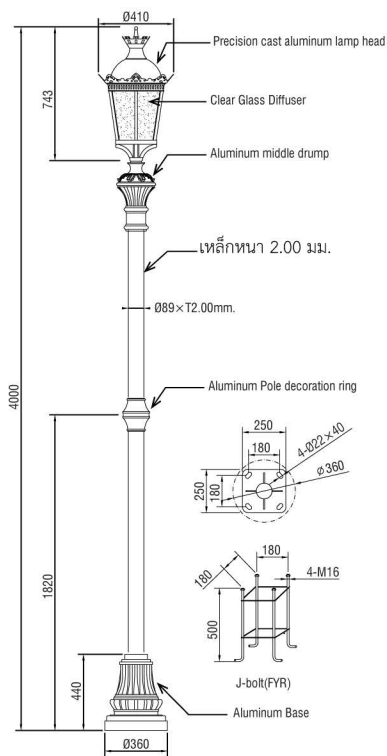

****Excluded of bolt for fixing with ground****

LC-WD-T1011G-1 Head + Pole T205 + Base R-373

CLASSIC POST LAMP

**E27
LAMP**

IP65

**ALUMINIUM
MATERIAL**

**MATT
ANTHRACITE
COLOR**

SPECIFICATION

Model	: LC-WD-T1011G-1 Head + Pole T205 + Base R-373
Light source	: 1×E27 (Waterproof Socket IP65) (Max. 50W)
Material	: Galvanized steel tube Aluminum base, Aluminum lamp head,
Craftwork	: The surface of the lamp body is electrostatic sprayed with high-quality UV protection outdoor plastic powder, thickness $\geq 80\mu\text{m}$, exposed fastener screws and nuts are (304#) stainless steel,
Color	: Matt Anthracite
Paint method	: Outdoor UV Spray Powder
Diffuser	: Clear glass
IP	: 65
Input Voltage	: AC220V~50Hz
Dimension (mm.)	: Lamp head $\varnothing 410 \times H 743$ mm. Pole $\varnothing 89 \times T 2.0$ mm. Total H4000 mm.



[illegible]

****Excluded of bolt for fixing with ground****


CLASSIC POST LAMP

**MATT
ANTHRACITE
COLOR**

Model	: LC-WD-T1011G-2 Head + Pole T205 + Arm Y009 + Base R-373
Light source	: 2×E27 (Waterproof Socket IP65) (Max. 50W)
Material	: Galvanized steel tube Aluminum base, Aluminum lamp head,
Craftwork	: The surface of the lamp body is electrostatic sprayed with high-quality UV protection outdoor plastic powder, thickness ≥80um, exposed astener screws and nuts are (304#) stainless steel,
Color	: Matt Anthracite
Paint method	: Outdoor UV Spray Powder
Diffuser	: Clear glass
IP	: 65
Input Voltage	: AC220V~50Hz
Dimension (mm.)	: Lamp head Ø410×H743 mm. Lamp Arm L1000 mm. Pole Ø89×T2.0 mm. Total H4000 mm.



DIMENSION (Unit mm.)

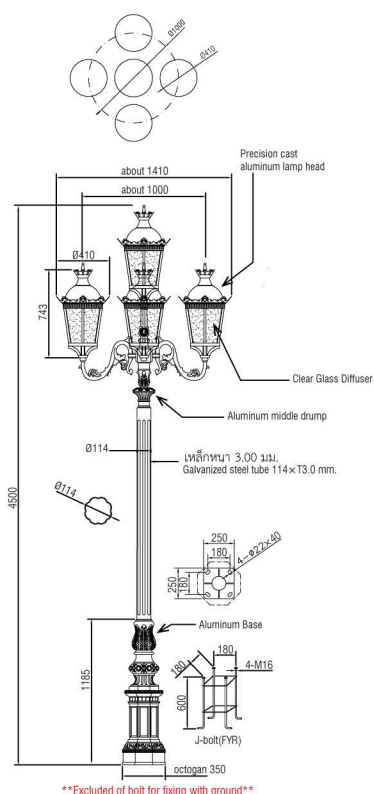

5x E27
LAMP

IP65

ALUMINIUM
MATERIAL

MATT
ANTHRACITE
COLOR


LC-WD-1011G-5 Head (4+1)+Pole T221S + Arm Y009 + Base T221 CLASSIC POST LAMP

SPECIFICATION

Model	: Garden light WD-1011G-5 Head(4+1) +Pole T221S + Arm Y009 + Base T221
Light source	: 5×E27 (Waterproof Socket IP65) (Max. 50W)
Material	: Galvanized steel tube Aluminum base, Aluminum lamp head,
Craftwork	: The surface of the lamp body is electrostatic sprayed with high-quality UV protection outdoor plastic powder, thickness ≥80um, exposed fastener screws and nuts are (304#) stainless steel,
Color	: Matt Anthracite
Paint method	: Outdoor UV Spray Powder
Diffuser	: Clear glass
IP	: 65
Input Voltage	: AC220V~50Hz
Dimension (mm.)	: Lamp head Ø410×H743 mm. Lamp Arm L1000 mm. Pole Ø114×T3.0 mm. Total H4500mm.



DIMENSION (Unit mm.)

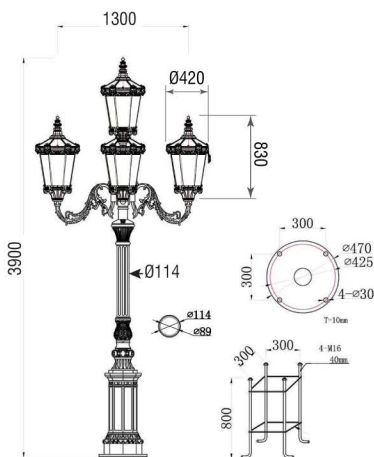

**5xE27
LAMP**

IP55

**ALUMINIUM
MATERIAL**

**MATT
ANTHRACITE
COLOR**

LC-WD-T202-5 CLASSIC POST LAMP


SPECIFICATION

Model	: LC-WD-T202-5
Light source	: 5 ×E27 (Waterproof Socket IP65) (Max. 50W)
Material	: The Lamp Head Base is Aluminum The Lamp Pole is Q235 Hot-dip Galvanizing Tube T3.0 mm. The Diffuser is Clear tempered glass The Screws are 304 Stainless Steel
Color	: Matt Anthracite (V322401S)
Paint method	: Outdoor UV Spray Powder
Diffuser	: Clear tempered glass
IP	: 55
Input Voltage	: AC220V~50Hz
Dimension (WxHxL)	: Head Size : Ø420×830×1300 mm. Total : H3900mm., , Pole Ø89×T3.0 mm.


UNIT PRICE : 57,000.-



DIMENSION (Unit mm.)

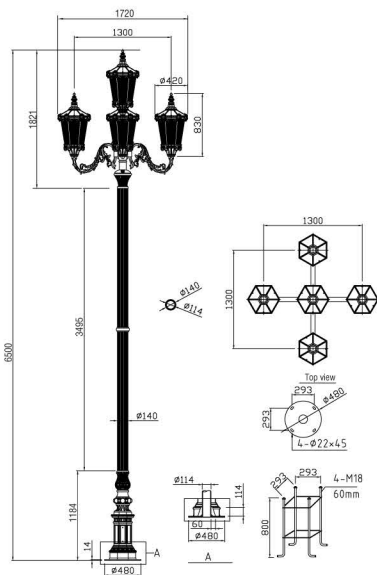

****Excluded of bolt for fixing with ground****

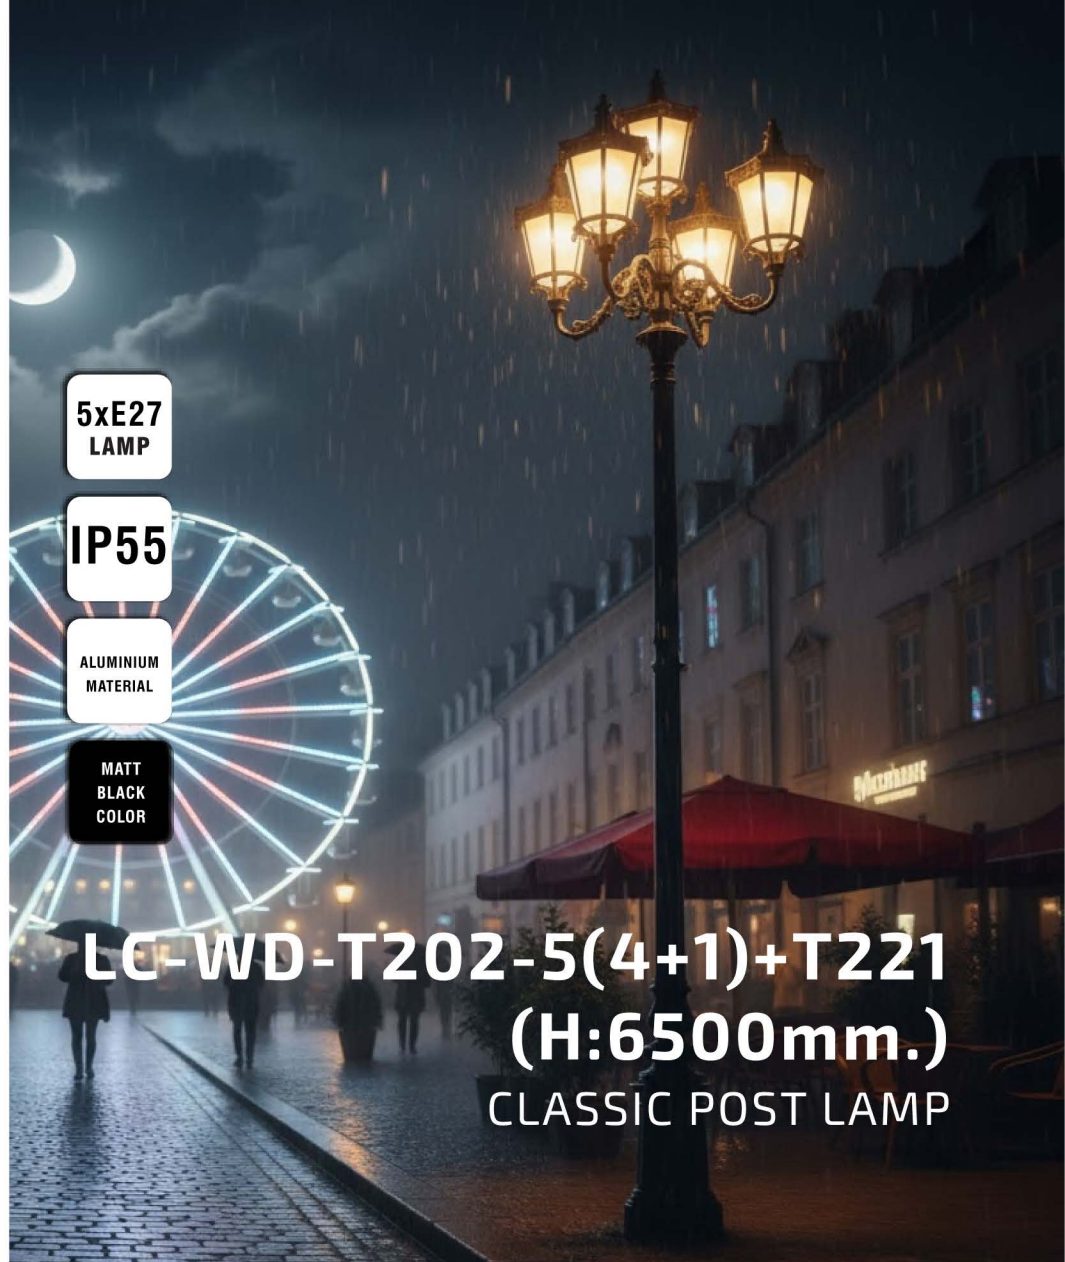

**5xE27
LAMP**

IP55

**ALUMINIUM
MATERIAL**

**MATT
BLACK
COLOR**


LC-WD-T202-5(4+1)+T221 (H:6500mm.) CLASSIC POST LAMP

SPECIFICATION

Model	: LC-WD-T202-5(4+1)+T221
Light source	: 5 × E27 (Waterproof Socket IP65) (Max. 50W)
Material	: Aluminum lamp head. Hot Dipped Galvanized Zinc Bath immersion steel middle pole and aluminum Pole Ø140×T3.0mm. (H6500mm.)
Color	: Matt Black
Paint method	: Outdoor UV Spray Powder
Diffuser	: Frosted Glass.
IP	: 55
Input Voltage	: AC220V~50Hz
Dimension (ØxHxW)	: Head Size : Ø420×H830×W1720mm. Total H6500 mm., Pole Ø140×T3.0mm.

UNIT PRICE : xx,xxx.-

LUC 

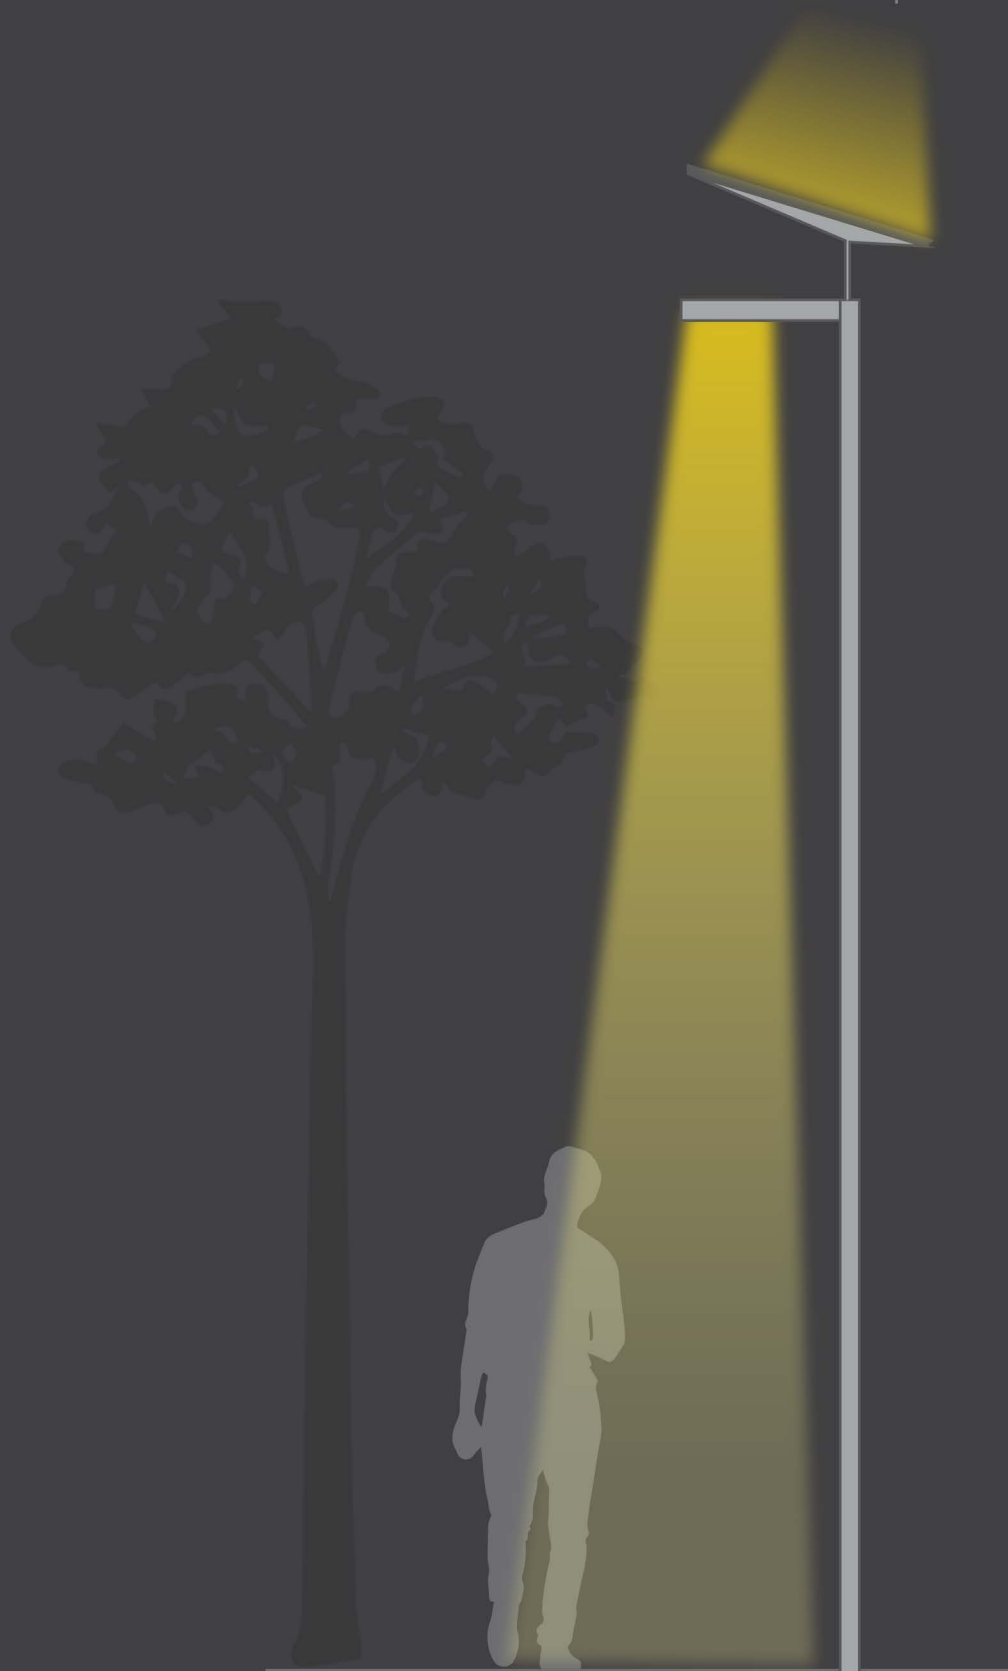


SOLAR LIGHT





1x2200mAh lithium battery Charge: 6-8H
(sunshine) Work time: 100%
of light 2.5-3H, 15% of light 20H-25H

DIMENSION (Unit mm.)

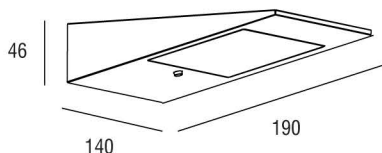

PHOTOMETRIC DATA



SPECIFICATION

Model	: SUNLITE WALL
Item No.	: H6041
Light source	: LED Chip
Solar Panel	: 2W Monocrystal
Light Source	: 2.2 W
Lumen	: 195 lm
CCT	: 3000K
Beam Angle	: 107°
Battery	: 2V 2Ah lithium battery
Charging Time	: 6-8 Hours (Sunshine)
Material	: Die-cast Aluminium
Color	: Anthracite
Paint method	: Outdoor UV Spray Powder
Optical cover	: Clear PC
Adjustable	: -
IP	: 54
Dimension (WxLxH)	: 190x140x46 mm.

ACCESSORY



Hex Wrench



Screw



Plastic Plug


+ Installation Manual

MORE INFORMATION


SOLAR PANEL

TYPE	MONOCRYSTALLINE SILICON SOLAR CELLS
MATERIAL	SILICON
POWER EFFICIENCY	17% - 20%
LIFETIME	25year+

UNIT PRICE : 3,500.-

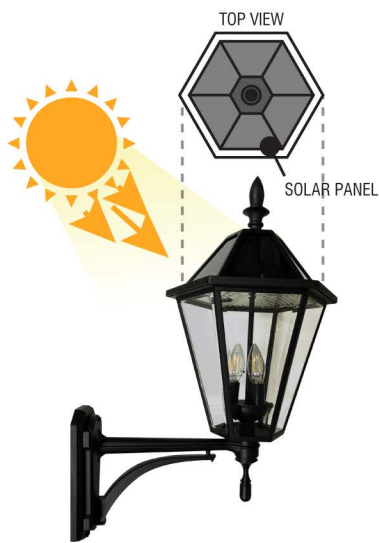

DIMENSION (Unit mm.)

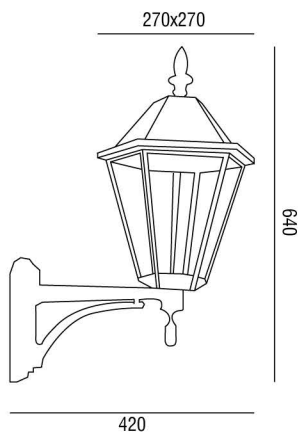

PHOTOMETRIC DATA

E12
LAMP

6W
SOLAR PANEL

IP65

DIE-CAST
ALUMINIUM
MATERIAL

ANTHRACITE
COLOR

Monocrystal
SOLAR TYPE


SOLAR LAMP

CE

SPECIFICATION

Model	: LONDON
Item No.	: 6951308012
Solar Panel	: 6W
Light Source	: 3×2W E12
Lumen	: 300 lm
CCT	: 3000K
Beam Angle	: -
Battery Type	: 7.4V 2.2Ah lithium battery
Charging Time	: 6-8 Hours (Sunshine)
Material	: Die-cast Aluminium
Color	: Black
Paint method	: Outdoor UV Spray Powder
Optical cover	: Clear Glass
Adjustable	: -
IP	: 65
Dimension (WxLxH)	: 270x420x640 mm.

MORE INFORMATION

SOLAR PANEL

TYPE	MONOCRYSTALLINE SILICON SOLAR CELLS
MATERIAL	SILICON
POWER EFFICIENCY	17% - 20%
LIFETIME	25year+


LONDON SOLAR WALL LIGHT

UNIT PRICE : 8,550.-





With Motion sensor
100% lighting controlled by motion sensor, 30%
lighting controlled by photocell.

DIMENSION (Unit mm.)

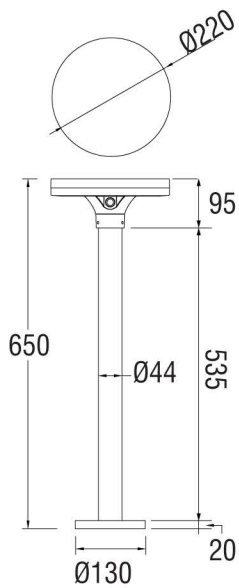

PHOTOMETRIC DATA

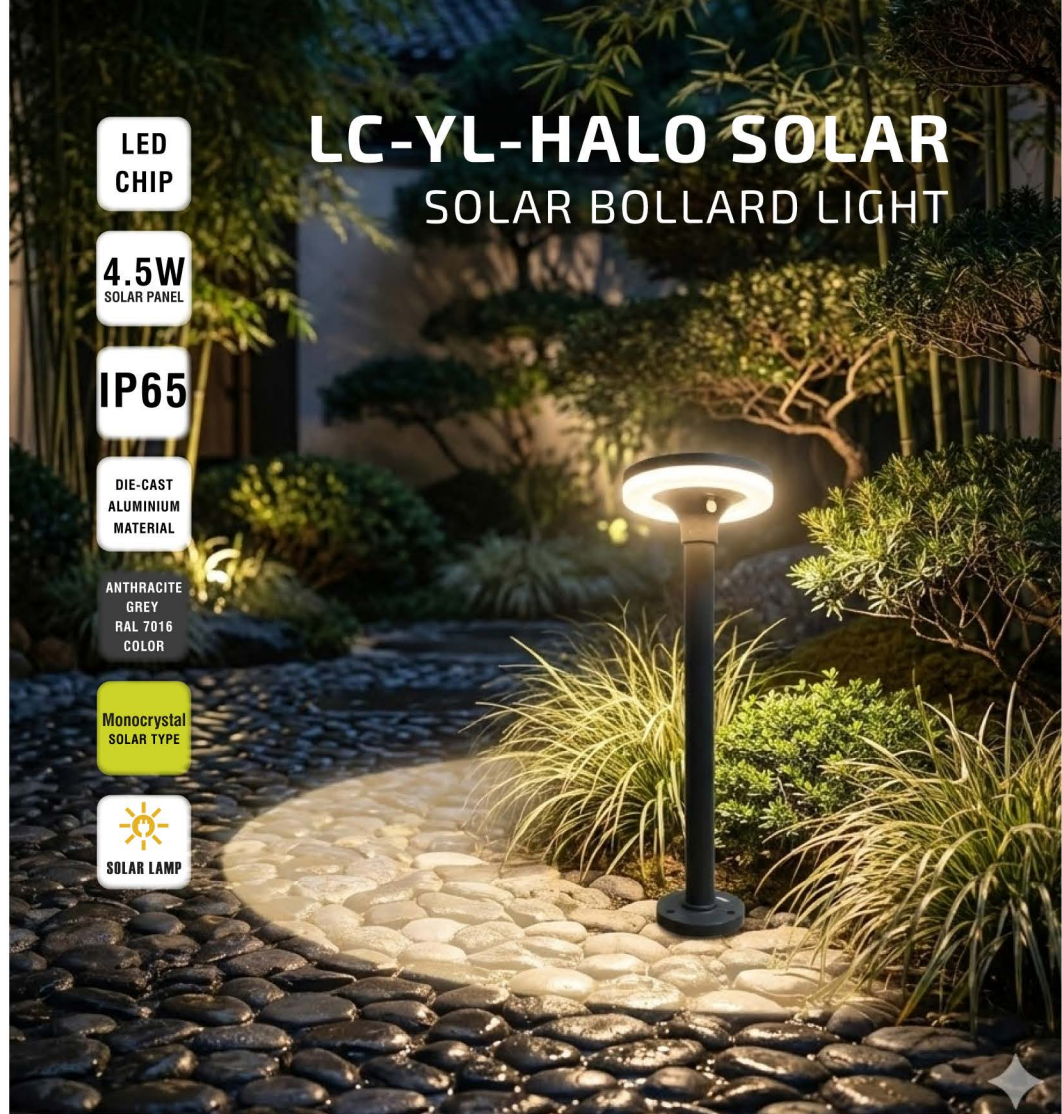

LED
CHIP

4.5W
SOLAR PANEL

IP65

DIE-CAST
ALUMINIUM
MATERIAL

ANTHRACITE
GREY
RAL 7016
COLOR

Monocrystal
SOLAR TYPE

SOLAR LAMP

LC-YL-HALO SOLAR

SOLAR BOLLARD LIGHT

SPECIFICATION

Model	: LC-YL-HALO SOLAR
Light source	: LED
Solar Panel	: 4.5 W
Light Source	: 2 W
Lumen	: 200 lm
CCT	: 3000K
Beam Angle	: 114°
Battery	: 3.2V 8Ah lithium battery
Charging Time	: 6-8 Hours
Material	: Die-cast Aluminium housing Extruded Aluminium pole
Color	: Anthracite Grey RAL 7016
Paint method	: Outdoor UV Spray Powder
Optical cover	: PMMA
Adjustable	: -
IP	: 65
Dimension	: Lamp Head Ø220×H95 mm. Pole Ø44×H535 mm. Base Ø130 ×H20 mm. Total Height 650 mm.

ACCESSORY



Hex Wrench

MORE INFORMATION

SOLAR PANEL

TYPE	MONOCRYSTALLINE SILICON SOLAR CELLS
MATERIAL	SILICON
POWER EFFICIENCY	17% - 20%
LIFETIME	25year+

Solar Panel
6V 4.5W monocrystalline




UNIT PRICE : 4,000.-





Charge : 6-8 Hours (Sunshine)
 Work Time : 100% of light 2.5-3 Hours
 15% of light 20-25 Hours

DIMENSION (Unit mm.)

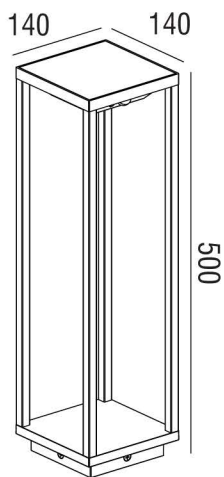

PHOTOMETRIC DATA



ARA MAXI SOLAR

SOLAR BOLLARD LIGHT

LED
SMD

2W
SOLAR PANEL

IP65

DIE-CAST
ALUMINIUM
MATERIAL

ANTHRACITE
COLOR

Monocrystal
SOLAR TYPE


SOLAR LAMP

CE

SPECIFICATION

Model	: ARA MAXI SOLAR
Item No.	: 2170103
Light source	: LED SMD
Solar Panel	: 2W
Light Source	: 2.2 W
Lumen	: 231 lm
CCT	: 3000K
Beam Angle	: 50°
Battery	: 2V 2Ah lithium battery
Charging Time	: 6-8 Hours
Material	: Diacasting Aluminium
Color	: Anthracite
Paint method	: Outdoor UV Spray Powder
Optical cover	: Safety glass lens
Adjustable	: -
IP	: 65
Dimension	: 140×140×500 mm.
Other	: Work time 100% of light: 2.5~3H, 15% of light: 20~25H (Motion Sensor)

ACCESSORY



+ Installation Manual

MORE INFORMATION

SOLAR PANEL

TYPE	MONOCRYSTALLINE SILICON SOLAR CELLS
MATERIAL	SILICON
POWER EFFICIENCY	17% - 20%
LIFETIME	25year+

UNIT PRICE : 1,297.-



LC-WD-C278-SOLAR-H1000

SOLAR BOLLARD LIGHT

8W
LED POWER

IP65

ALUMINIUM
MATERIAL


MATT
BLACK
COLOR

MONOCRYSTAL
SOLAR TYPE


SOLAR LAMP



DIMENSION (Unit mm.)

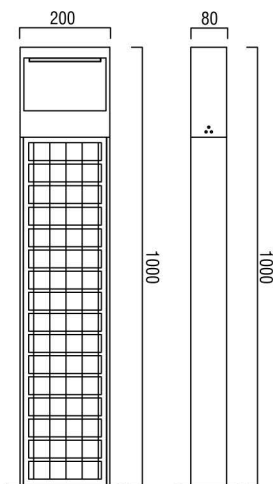


SPECIFICATION

Model	: LC-WD-C278-SOLAR-H1000
Light source	: LED
Solar Panel	: Pmax 25W×2 Monocrystalline
LED Power	: 8W
Input voltage	: 9~24V
Lumen	: 150lm/W
CCT	: 3000K
Beam Angle	: 120°
Battery	: 12.8V 8Ah LiFePo4
Runtime	: Light on 100% (no dimming) for 12 hours no remote control, no sensor
Charging Time	: 8-10 Hours
Working Time	: 12 Hours
Discharging Time	: 3-4 Days
Material	: Aluminum
Color	: Matte Black (V322401S)
Paint method	: Outdoor UV Powder
Diffuser	: Tempered glass
Adjustable	: -
IP	: 65
Dimension (WxLxH)	: 80×200×H1000 mm.


UNIT PRICE : xxxx




DIMENSION (Unit mm.)

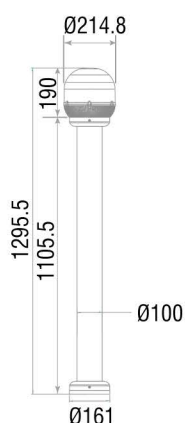

PHOTOMETRIC DATA



SIMULATED DIAGRAM



LED
LAMP

2.8W
SOLAR PANEL

IP66

ALUMINIUM
MATERIAL


GREY
COLOR

Monocrystal
SOLAR TYPE


SOLAR LAMP

LC-WD-ABL-03

SOLAR BOLLARD LIGHT

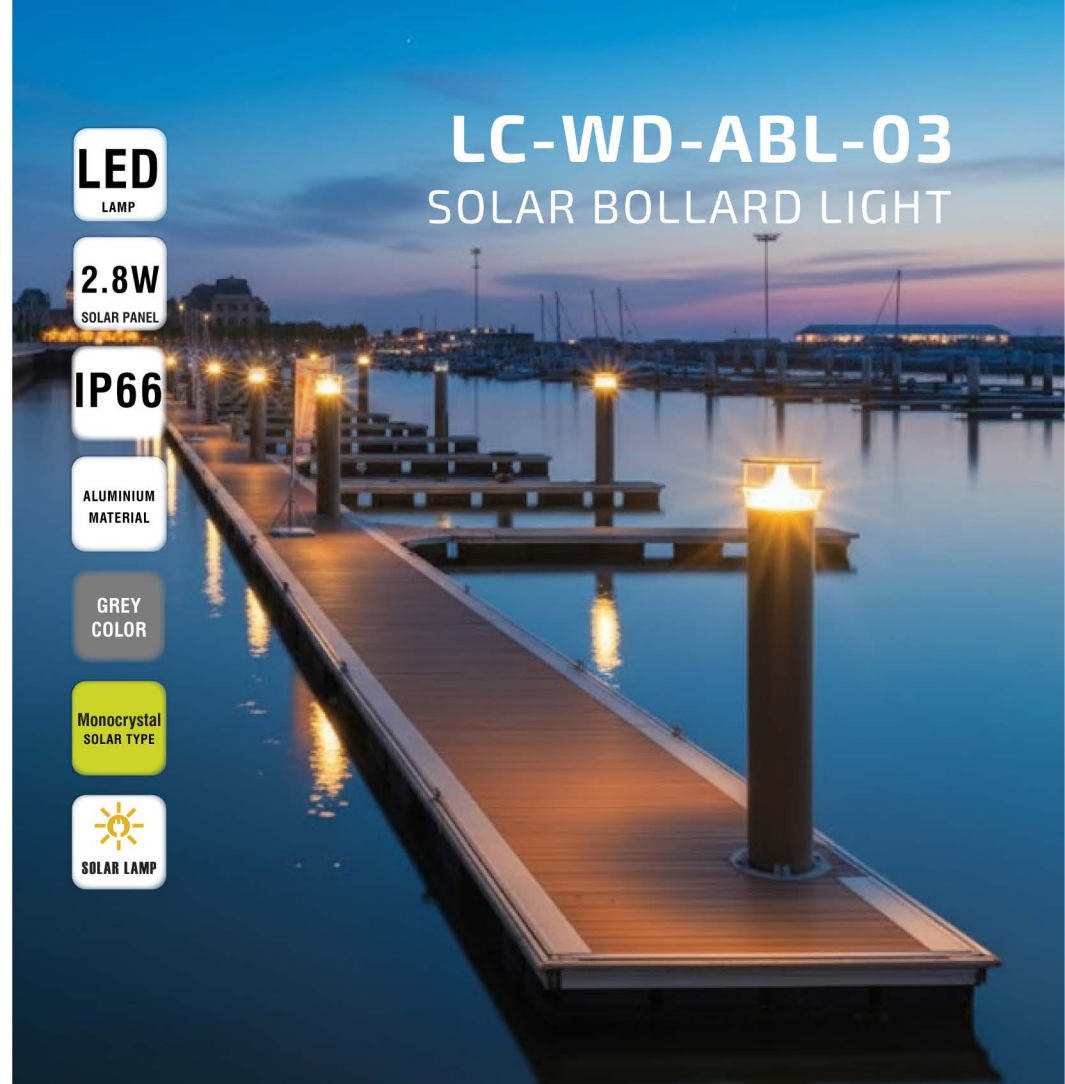

SPECIFICATION


Model	: LC-WD-ABL-03
Light source	: LED Osram 3030
Solar Panel	: 4.3V/2.8W (Monocrystalline)
LED Power	: 3W
Lumen	: 300lm
CCT	: 3000K
Beam Angle	: 180°
Battery	: 5AH×2, 3.7V, 37WH, Li-Ion
Default Lighting Mode	: 100%5H+30% till dawn (Red ●) M2: 70% till dawn (Green ●) M3: 30% till dawn (Orange ●)
Charging Time	: 8-10 Hours
Working Time	: 12 Hours
Discharging Time	: 3-4 Days
Material	: Aluminum
Color	: Grey
Paint method	: Outdoor UV Spray Powder Anti-corrosion
Diffuser	: PC
Adjustable	: -
IP/IK	: IP66 / IK10
Dimension Head (ØxH)	: Ø214.8×H190 mm.
Total height	: H1295.5 mm.
Base	: Ø161 mm.

MORE INFORMATION



**360° Sunlight
Auto-Tracking**

Tracker use the latest technology to calculate the sun's maximum energy in real-time to track the position of sunlight and realizes the effect of 360° sun tracking, and obtain the maximum sun power and increase the charging efficiency by 30% compared with other similar products.



UNIT PRICE : xxxx

LC-ZC-CPD9208

SOLAR BOLLARD LIGHT



LED
SMD

8.5W
LED POWER

IP65


DIE-CAST
ALUMINIUM
MATERIAL

ANTHRACITE
COLOR


MONOCRYSTAL
SOLAR TYPE



DIMENSION (Unit mm.)

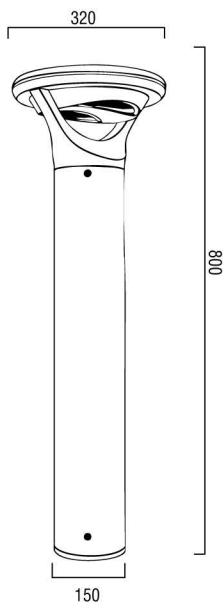

PHOTOMETRIC DATA

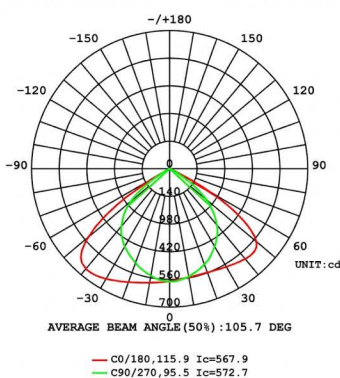

SPECIFICATION


Model	: LC-ZC-CPD9208
Light source	: 3V 3030 SMD
Lumen	: 1420 lm
CCT	: 3000K
Battery	: 38.4WH 3.2V (LiFePO4 3.2V 12AH)
Solar Panel	: Monocrystalline silicon 5V 8.5W
Installation type	: Seat type
Charging time	: 6h
Last rainy days	: 3 days
Material	: die casting aluminum+PC
QTY chips	: 60pcs 3030 chips
Controller	: PWM
Working Mode	: light sensor, automatic turn on in daytime , automatic charging during night
Working temperature	: -25° to 65°
IP	: IP65
Dimension Head (ØxH)	: 320 x 800mm
Base	: Ø150 mm.

ACCESSORY



MORE INFORMATION

Remote Control Functions

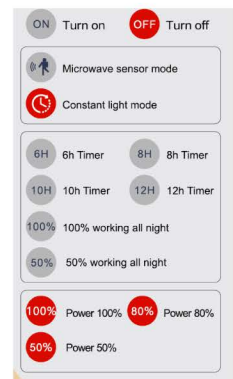


UNIT PRICE : xxxx

SWING SOLAR



SOLAR ON GROUND



DIMENSION (Unit mm.)



PHOTOMETRIC DATA



LED
LAMP

2W
SOLAR PANEL

IP65

DIE-CAST
ALUMINIUM
MATERIAL

ANTHRACITE
COLOR

Monocrystal
SOLAR TYPE


SOLAR LAMP

CE

SPECIFICATION

Model	: SWING SOLAR
Item No.	: H6131
Light source	: LED
Solar Panel	: 2W
LED Power	: 2.5W
Lumen	: 250 lm
CCT	: 3000K
Beam Angle	: 106°
Battery	: 3×1.8Ah lithium battery
Charging Time	: 7 Hours
Material	: Die-cast aluminium
Color	: Anthracite
Paint method	: Outdoor UV Spray Powder
Optical cover	: Opal PC
Adjustable	: -
IP	: 65
Dimension (ØxH)	: Ø200×144mm.
Sensor	: Automatically light up at night (≤50lux) work time: 11H

ACCESSORY

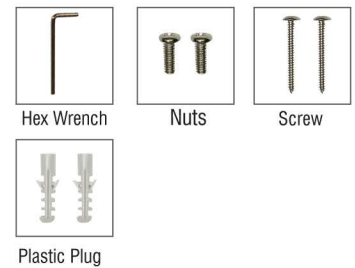

MORE INFORMATION


SOLAR PANEL

TYPE	MONOCRYSTALLINE SILICON SOLAR CELLS
MATERIAL	SILICON
POWER EFFICIENCY	17% - 20%
LIFETIME	25year+


UNIT PRICE : xxxx



DIMENSION (Unit mm.)

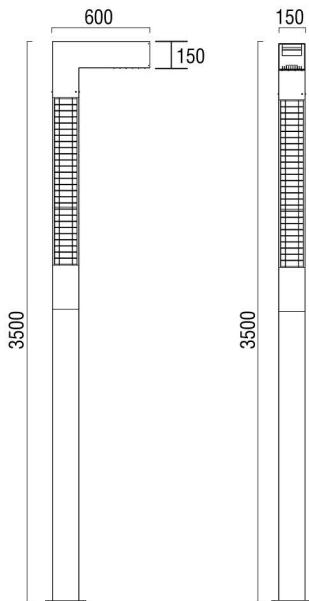

*Excluded of bolt for fixing with ground

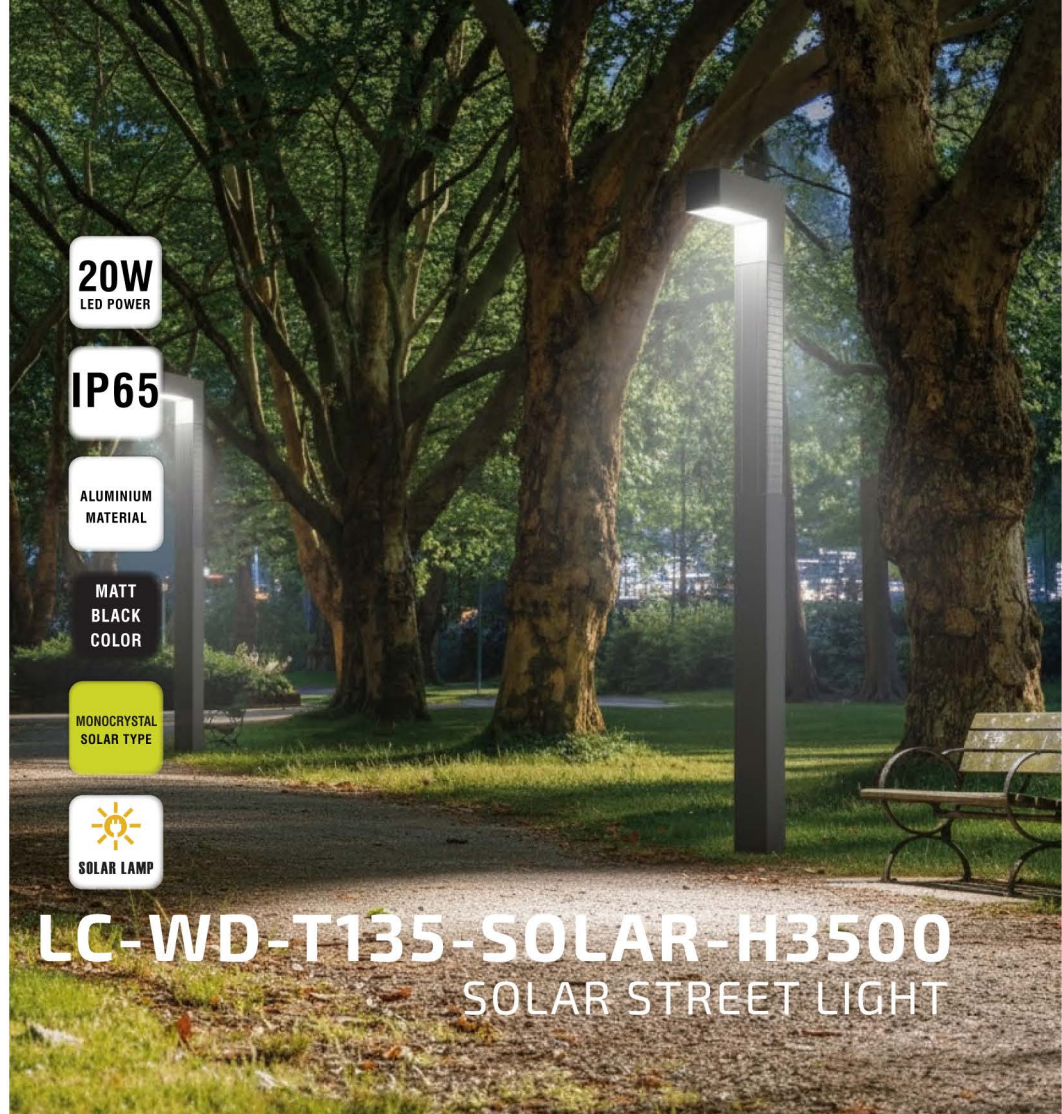

20W
LED POWER

IP65

ALUMINIUM
MATERIAL

MATT
BLACK
COLOR

MONOCRYSTAL
SOLAR TYPE



LC-WD-T135-SOLAR-H3500

SOLAR STREET LIGHT


SPECIFICATION

Model	: LC-WD-T135-SOLAR-H3500
Light source	: LED
Solar Panel	: Pmax 22.5W, 4 × (Monocrystalline)
LED Power	: 20W
Input voltage	: 9~24V
Lumen	: 150lm/W
CCT	: 3000K
Beam Angle	: 120°
Battery	: 3.2V 100Ah LiFePo4
Runtime	: Light on 100% (no dimming) for 12 hours no remote control, no sensor
Charging Time	: 8-10 Hours
Working Time	: 12 Hours
Discharging Time	: 3-4 Days
Material	: Pole Aluminum
Color	: Matte Black (V322401S)
Paint method	: Outdoor UV Powder
Diffuser	: Tempered glass
Adjustable	: -
IP	: 65
Dimension	: Pole W150×L150×H3500mm. Head 150×150×600 mm.


UNIT PRICE : xxxx



DIMENSION (Unit mm.)

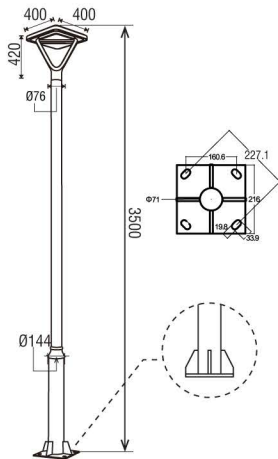

*Excluded of bolt for fixing with ground

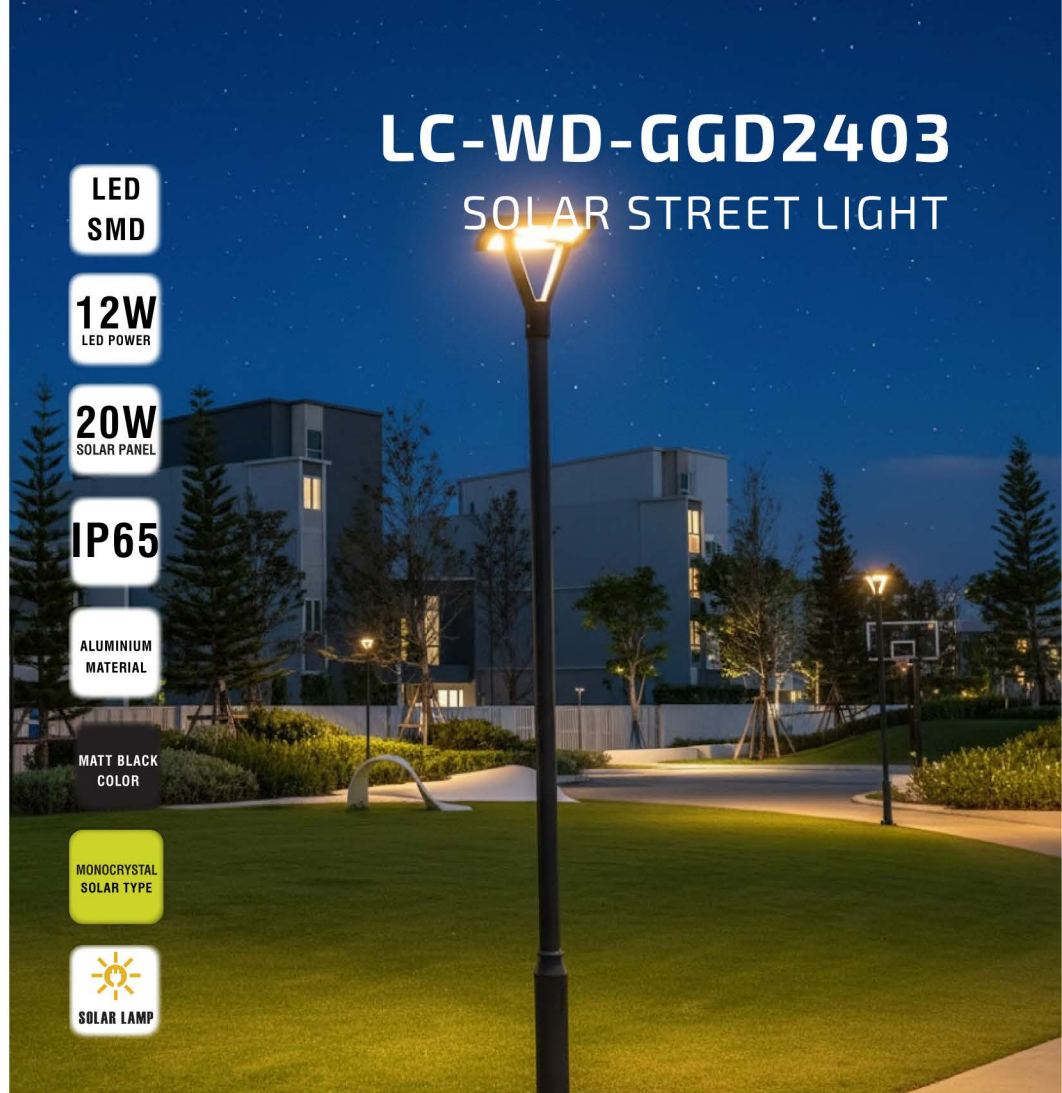

LC-WD-GGD2403

SOLAR STREET LIGHT

LED
SMD

12W
LED POWER

20W
SOLAR PANEL

IP65

ALUMINIUM
MATERIAL

MATT BLACK
COLOR

MONOCRYSTAL
SOLAR TYPE



SPECIFICATION

Model	: LC-WD-GGD2403
Light source	: LED SMD 2835
Solar Panel	: 20W 5V Monocrystalline Solar
LED Power	: 12W
Lumen	: 1800lm
CCT	: 3000K
Beam Angle	: 140°
Battery	: 3.2V 20AH LiFeP04 Lithium Battery
Charging Time	: 3-5 Hours
Working Time	: 12 Hours
Discharging Time	: 3-4 Days
Material	: - Die casting aluminum+PC - Galvanized pole.
Color	: Matt Black
Paint method	: Outdoor UV Spray Powder
Optical cover	: PMMA
Adjustable	: -
IP	: 65
Dimension (mm.)	: Lamp Head 400×400 × H420 mm.
Total Height	: 3500 mm.

MORE INFORMATION

SOLAR PANEL


TYPE	MONOCRYSTALLINE SILICON SOLAR CELLS
MATERIAL	SILICON
POWER EFFICIENCY	17% - 20%
LIFETIME	25year+



UNIT PRICE : 14,000.-



DIMENSION (Unit mm.)

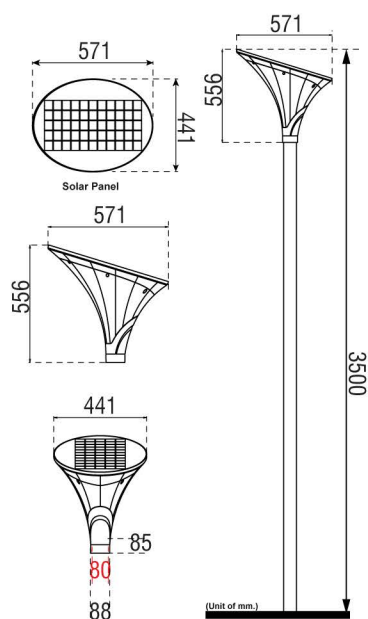

*Excluded of bolt for fixing with ground

LED
LAMP

25W
SOLAR PANEL

IP65

DIE-CAST
ALUMINIUM
MATERIAL

MATT BLACK
COLOR

MONOCRYSTAL
SOLAR TYPE



LC-WD-LILY SOLAR SOLAR STREET LIGHT

SPECIFICATION

Model	: LC-WD-LILY SOLAR
Light source	: LED SMD 2835
Solar Panel	: 25W 5V Monocrystalline Solar
LED Power	: 12W
Lumen	: 1320lm~1440lm
CCT	: 3000K
Beam Angle	: N/A
Battery	: 3.2V 30Ah lithium battery
Charging Time	: 3-5 Hours
Discharging Time	: 3~4 days
Material	: Die-casting aluminum Galvanized pole.
Color	: Matt Black
Paint method	: Outdoor UV Spray Powder
Optical cover	: PMMA
IP	: 65
Dimension	: Lamp Head 571×441×H556mm.
Total Height	: 3500 mm.

MORE INFORMATION

SOLAR PANEL

TYPE	MONOCRYSTALLINE SILICON SOLAR CELLS
MATERIAL	SILICON
POWER EFFICIENCY	17% - 20%
LIFETIME	25year+


Solar Panel
25W



UNIT PRICE : xxxx



DIMENSION (Unit mm.)

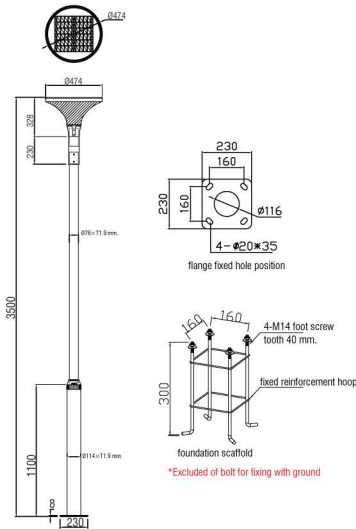

LED
LAMP

8W
LED POWER

22W
SOLAR PANEL

IP65

DIE-CAST
ALUMINIUM
MATERIAL

BLACK
COLOR

MONOCRYSTAL
SOLAR TYPE

SOLAR LAMP

LC-WD-5X-DC-ZT

SOLAR STREET LIGHT

SPECIFICATION

Model	: LC-WD-5X-DC-ZT
Light source	: LED
Solar Panel	: 22W 5V Monocrystalline Solar
LED Power	: 8W
Lumen	: 960 lm
CCT	: 3000K
Beam Angle	: 140°
Battery	: 3.2V 15Ah lithium battery
Charging Time	: 3-5 Hours
Working Time	: 8 Hours
Discharging Time	: 3-4 Days
Material	: (Lamp) Die Casting Aluminum+Frosty PMMA (Pole) Galvanized steel
Color	: Black
Paint method	: Outdoor UV Spray Powder
Diffuser	: PMMA Frosted Acrylic
Adjustable	: -
IP	: 65
Dimension	: Lamp head $\varnothing 474 \times H 328$ mm.
Total Height	: Total H : 3500 mm.

MORE INFORMATION


SOLAR PANEL

TYPE	MONOCRYSTALLINE SILICON SOLAR CELLS
MATERIAL	SILICON
POWER EFFICIENCY	17% - 20%
LIFETIME	25year+

UNIT PRICE : xxxx



DIMENSION (Unit mm.)

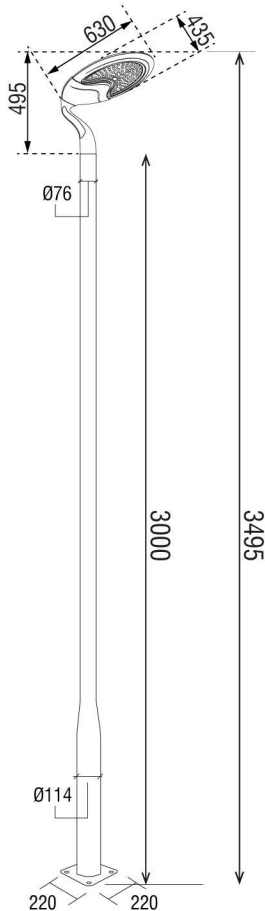

*Excluded of bolt for fixing with ground

LC-ZC-TYD-5108-F Pole-3m. SOLAR STREET LIGHT

- LED SMD
- 15W LED POWER
- 25W SOLAR PANEL
- IP65
- DIE-CAST ALUMINIUM MATERIAL
- SAND BLACK COLOR
- Monocrystal SOLAR TYPE
- SOLAR LAMP

SPECIFICATION

Model	: LC-ZC-TYD-5108-F Pole-3m.
Light source	: 100pcs. LED SMD 2835
Solar Panel	: 25W 5V Monocrystalline Solar
LED Power	: 15W
Lumen	: 2300 lm
CCT	: 4000K
Beam Angle	: 70°×140°
Battery	: 3.2V 36AH lithium battery
Charging Time	: 3-5 Hours
Working Time	: 12 Hours
Discharging Time	: 3-4 Days
Material	: Lamp : Die casting Aluminum Pole : Q235 Galvanized pipe
Color	: Sand Black
Paint method	: Outdoor UV Spray Powder
Diffuser	: PC optical lens
Adjustable	: -
IP	: 65
Dimension	: Pole : H3000 mm. Lamp Head : 630×435×H495 mm. Total H : 3495 mm.

MORE INFORMATION

SOLAR PANEL

TYPE	MONOCRYSTALLINE SILICON SOLAR CELLS
MATERIAL	SILICON
POWER EFFICIENCY	17% - 20%
LIFETIME	25year+




UNIT PRICE : 15,000.-

LC-AOK-SC30


SOLAR STREET LIGHT



DIMENSION (Unit mm.)

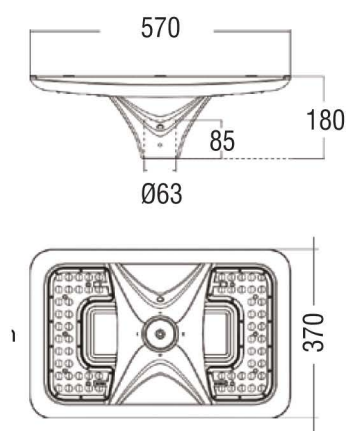

AUTONOMY CONTROL REFERENCE



LED
LAMP

35W
SOLAR PANEL

IP65

ALUMINIUM
MATERIAL

BLACK
COLOR


MONOCRYSTAL
SOLAR TYPE

SOLAR LAMP

SPECIFICATION

Model	: LC-AOK-SC30
Light source	: 5050 LED chips
Solar Panel	: 35W 12V Monocrystalline Solar
LED Power	: 15W
Lumen	: 2300 lm
CCT	: 4000K
Beam Angle	: N/A
Battery	: 3.2V 36Ah lithium battery
Charging Time	: 3-5 Hours
Material	: Die-casting aluminum galvanized pole.
Color	: Black
Paint method	: Outdoor UV Spray Powder
Optical cover	: Optical lens
Adjustable	: -
IP	: 65
Dimension	: Lamp Head 570 × 370 × H180 mm.

PHOTOMETRIC DATA



MORE INFORMATION


SOLAR PANEL

TYPE	MONOCRYSTALLINE SILICON SOLAR CELLS
MATERIAL	SILICON
POWER EFFICIENCY	17% - 20%
LIFETIME	25year+

UNIT PRICE : 30,000.-



DIMENSION (Unit mm.)

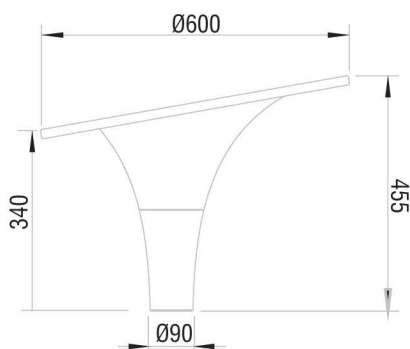

PERFORMANCE

CHANGE COLOR

The color is switchable between daylight 6000K (or cool white 4000K) and warm white 3000K. Easy to set by remote as required. Winter with warm white and Summer time with cool white. Creating a comfortable atmosphere freely.

CHANGE POWER


The power is changeable as 20%, 40%, 60%, 80%, and 100% to adjustable according to the local solar radiation to save energy, guaranteeing the lighting service is always there even in very challenging conditions.

CHANGE MODE

The default setting is continuous lighting with fixed brightness, also motion sensor function is available. The luminaire works with 30% power normally and works with 100% power when the motion sensor is triggered at people come by. Saving more power with longer battery backup.

CHANGE TIME

Different lighting time durations are available as 4 hours, 6 hours, and 12 hours optional to meet different requirements. This helps to save more energy and extend the lifetime of light as well as more days backup.

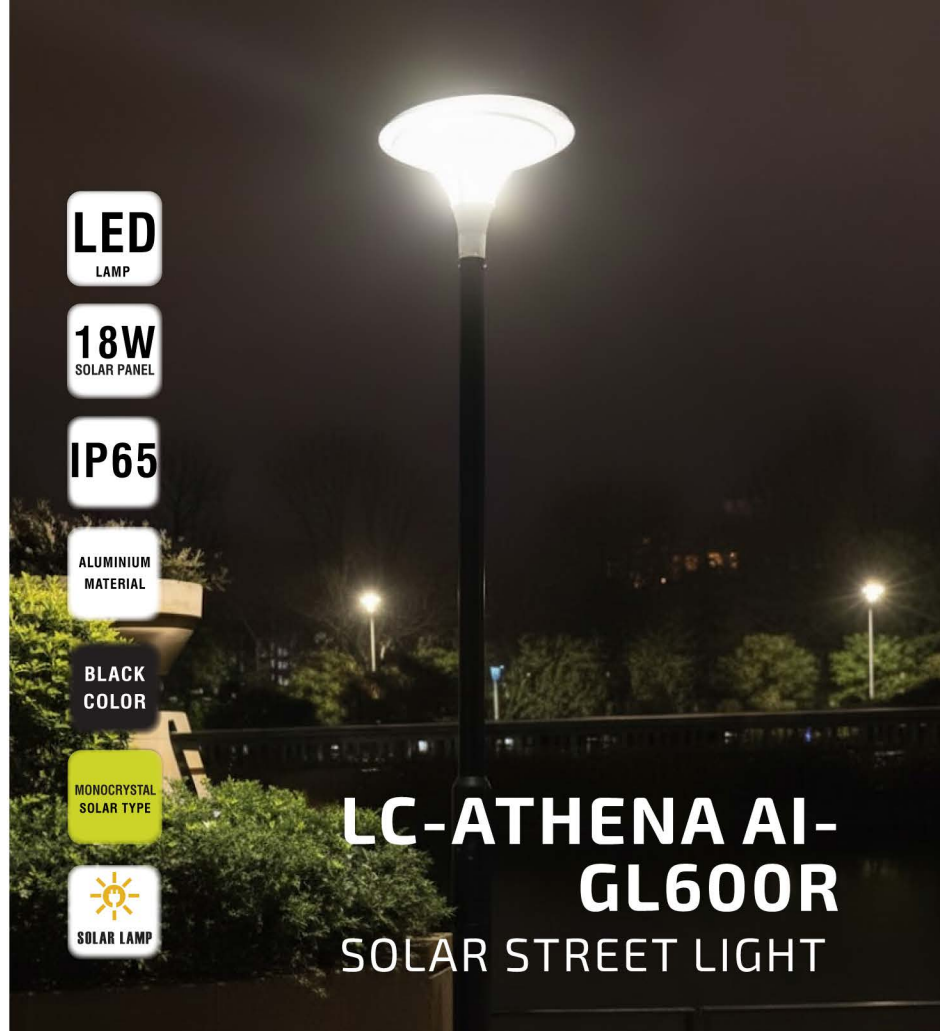

SPECIFICATION

Material	: Die-casting aluminum + polycarbonate
Color	: Black
Lamp size	: Ø600 x H455 mm.
LED source	: 128pcs smd3030
LED power	: 18W max
Luminous flux	: >2,800lm
CCT	: 3000K-6000K
CRI	: >83
Default light program	: 4H 100% + 4H 50% + 5H 30%
Motion sensor mode	: 30% + 100% triggered sensor
Sensor type	: Microwave sensor
Battery	: 12.8V 12Ah lithium battery
Battery lifetime	: >3000 cycles D.O.D : 70%
Charge controller	: MPPT 97%
Solar Panel	: 42W 18V monocrystalline
Brightness level	: 20%, 40%, 60%, 80%, 100%
Working time options	: 4Hours / 6Hours / 12Hours
Working Temp.	: -20°C ~ 70°C
Remote control	: PIR
IP	: 65
Pole diameter to install	: Ø90mm.
Net weight	: 11.5Kg
Gross weight	: 12.80Kg
Warranty	: 3 Years

MORE INFORMATION


SOLAR PANEL

TYPE	MONOCRYSTALLINE SILICON SOLAR CELLS
MATERIAL	SILICON
POWER EFFICIENCY	17% - 20%
LIFETIME	25year+

UNIT PRICE : xxxx



DIMENSION (Unit mm.)



MORE INFORMATION

SOLAR PANEL

TYPE	MONOCRYSTALLINE SILICON SOLAR CELLS
MATERIAL	SILICON
POWER EFFICIENCY	17% - 20%
LIFETIME	25year+

LED
LAMP

60W
LED POWER

280W
SOLAR
MAX POWER

IP65

ALUMINIUM
MATERIAL

BLACK
COLOR

MONOCRYSTAL
SOLAR TYPE



LC-ARTEMIS

SOLAR STREET LIGHT

SPECIFICATION

LUMINAIRE

LED Type & Power	: 60Watts
Luminous Flux	: >8,800lm
CCT	: 3000K
Beam Angle	: 120°

SOLAR WRAP PV

Max Power	: 280W
Output Voltage	: 18V
Dimention	: 228×220×1560mm.
Module Quantity	: 2 units

BATTERY PACK

Rated Capacity	: 12.8V 48Ah
Battery Cell	: 32700 6AH 32pcs
Battery Lifetime	: >4000cycles @ D.O.D 50%
Working Temp.	: -25°C ~ +65°C

MPPT CHARGE CONTROLLER

Max. load	: <60 Watts
Max SolarWrap PV	: 240 Watt 18V
Programmable	: yes
IP	: 65

UNIT PRICE : xxxx

LC-Q140

SOLAR STREET LIGHT

IP65

ALUMINIUM
MATERIAL

140W
/MODULE

MONOCRYSTAL
SOLAR TYPE



Silicon Solar Panel


SPECIFICATION

Dimension	: 228×200×1560 mm.
Pmax	: 140W
Vmp & Imp	: 18V 7.78A
Cell type	: MONO made in Taiwan
Solar cell efficiency	: 21.50%
Cable & Connector	: Universal MC4 with 0.6 meter 2.5mm
Structure material	: Aluminum alloy with powder coated >20 years lifetime
Operating temp.	: -20°C ~ +70°C
PV Lifetime	: >20 years
N.W / G.W	: 20.70kg / 22.80kg
Max pole diameter	: 155 mm.
Warranty	: 5 years

Fixture materials	: Aluminium+Glass
Powers max	: 140W
Type of solar panel	: rigid solar panel
Solar panel cell	: Monocrystalline
Conversion efficiency	: 21.2%
Qty of slim solar module	: 6 pcs/module
Connectors type	: MC4

Connection cable	: 0.5 meters 2.5mm ²
Connection cables	: 2 pairs of MC4
Linkable & Disassemble	: Yes
Max diameter of pole to suit	: 155 mm.
Wind resistance level	: Class 13 37.0~41.4m/s
IP	: 65

DIMENSION (Unit mm.)

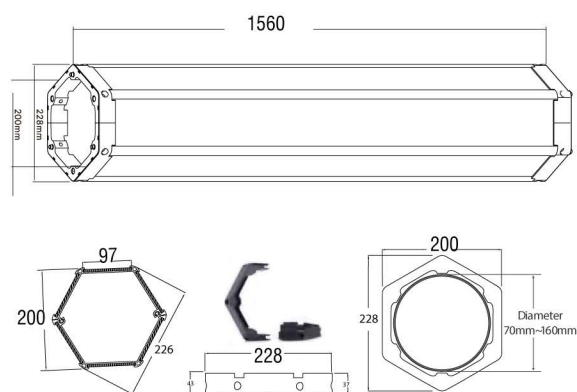

MORE INFORMATION

SOLAR PANEL

TYPE	MONOCRYSTALLINE SILICON SOLAR CELLS
MATERIAL	SILICON
POWER EFFICIENCY	17% - 20%
LIFETIME	25year+


UNIT PRICE : xxxx

LC-AOK-SC30


SOLAR STREET LIGHT



DIMENSION (Unit mm.)

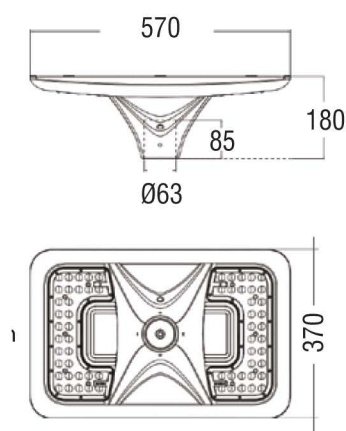

AUTONOMY CONTROL REFERENCE



LED
LAMP

35W
SOLAR PANEL

IP65

ALUMINIUM
MATERIAL

BLACK
COLOR


MONOCRYSTAL
SOLAR TYPE

SOLAR LAMP

SPECIFICATION

Model	: LC-AOK-SC30
Light source	: 5050 LED chips
Solar Panel	: 35W 12V Monocrystalline Solar
LED Power	: 15W
Lumen	: 2300 lm
CCT	: 4000K
Beam Angle	: N/A
Battery	: 3.2V 36Ah lithium battery
Charging Time	: 3-5 Hours
Material	: Die-casting aluminum galvanized pole.
Color	: Black
Paint method	: Outdoor UV Spray Powder
Optical cover	: Optical lens
Adjustable	: -
IP	: 65
Dimension	: Lamp Head 570 × 370 × H180 mm.

PHOTOMETRIC DATA



MORE INFORMATION


SOLAR PANEL

TYPE	MONOCRYSTALLINE SILICON SOLAR CELLS
MATERIAL	SILICON
POWER EFFICIENCY	17% - 20%
LIFETIME	25year+

UNIT PRICE : 30,000.-



DIMENSION (Unit mm.)

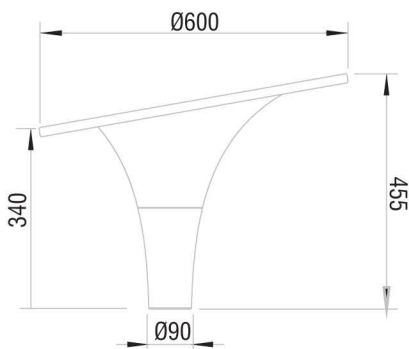

PERFORMANCE

CHANGE COLOR

The color is switchable between daylight 6000K (or cool white 4000K) and warm white 3000K. Easy to set by remote as required. Winter with warm white and Summer time with cool white. Creating a comfortable atmosphere freely.

CHANGE POWER


The power is changeable as 20%, 40%, 60%, 80%, and 100% to adjustable according to the local solar radiation to save energy, guaranteeing the lighting service is always there even in very challenging conditions.

CHANGE MODE

The default setting is continuous lighting with fixed brightness, also motion sensor function is available. The luminaire works with 30% power normally and works with 100% power when the motion sensor is triggered at people come by. Saving more power with longer battery backup.

CHANGE TIME

Different lighting time durations are available as 4 hours, 6 hours, and 12 hours optional to meet different requirements. This helps to save more energy and extend the lifetime of light as well as more days backup.

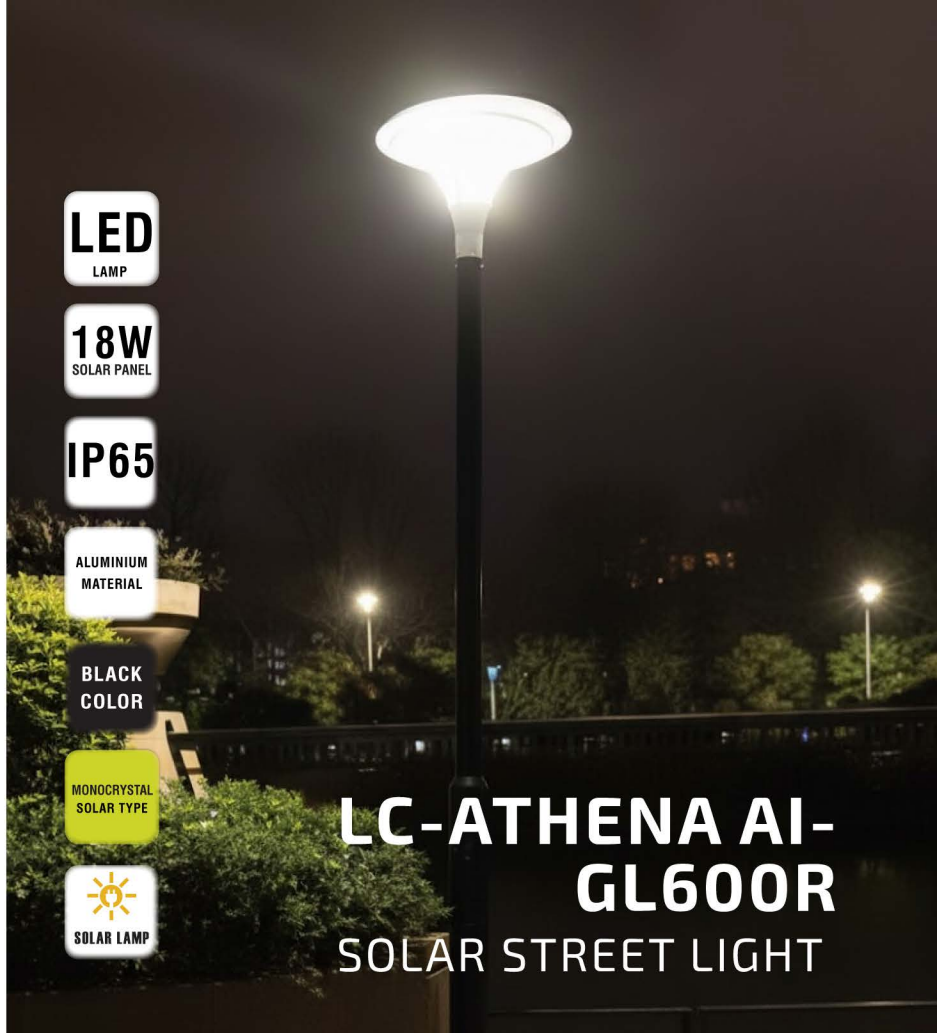

LED
LAMP

18W
SOLAR PANEL

IP65

ALUMINIUM
MATERIAL

BLACK
COLOR

MONOCRYSTAL
SOLAR TYPE

SOLAR LAMP

LC-ATHENA AI-GL600R
SOLAR STREET LIGHT

SPECIFICATION

Material	: Die-casting aluminum + polycarbonate
Color	: Black
Lamp size	: Ø600 x H455 mm.
LED source	: 128pcs smd3030
LED power	: 18W max
Luminous flux	: >2,800lm
CCT	: 3000K-6000K
CRI	: >83
Default light program	: 4H 100%+4H 50%+5H 30%
Motion sensor mode	: 30%+100% triggerred sensor
Sensor type	: Microwave sensor
Battery	: 12.8V 12Ah lithium battery
Battery lifetime	: >3000 cycles D.O.D : 70%
Charge controller	: MPPT 97%
Solar Panel	: 42W 18V monocrystalline
Brightness level	: 20%, 40%, 60%, 80%, 100%
Working time options	: 4Hours / 6Hours / 12Hours
Working Temp.	: -20°C~70°C
Remote control	: PIR
IP	: 65
Pole diameter to install	: Ø90mm.
Net weight	: 11.5Kg
Gross weight	: 12.80Kg
Warranty	: 3 Years

MORE INFORMATION


SOLAR PANEL

TYPE	MONOCRYSTALLINE SILICON SOLAR CELLS
MATERIAL	SILICON
POWER EFFICIENCY	17% - 20%
LIFETIME	25year+

UNIT PRICE : xxxx



DIMENSION (Unit mm.)



MORE INFORMATION

SOLAR PANEL

TYPE	MONOCRYSTALLINE SILICON SOLAR CELLS
MATERIAL	SILICON
POWER EFFICIENCY	17% - 20%
LIFETIME	25year+

LED
LAMP

60W
LED POWER

280W
SOLAR
MAX POWER

IP65

ALUMINIUM
MATERIAL

BLACK
COLOR

MONOCRYSTAL
SOLAR TYPE



LC-ARTEMIS

SOLAR STREET LIGHT

SPECIFICATION

LUMINAIRE

LED Type & Power	: 60Watts
Luminous Flux	: >8,800lm
CCT	: 3000K
Beam Angle	: 120°

SOLAR WRAP PV

Max Power	: 280W
Output Voltage	: 18V
Dimension	: 228×220×1560mm.
Module Quantity	: 2 units

BATTERY PACK

Rated Capacity	: 12.8V 48Ah
Battery Cell	: 32700 6AH 32pcs
Battery Lifetime	: >4000cycles @ D.O.D 50%
Working Temp.	: -25°C ~ +65°C

MPPT CHARGE CONTROLLER

Max. load	: <60 Watts
Max SolarWrap PV	: 240 Watt 18V
Programmable	: yes
IP	: 65

UNIT PRICE : xxxx



Silicon Solar Panel

SPECIFICATION

Dimension	: 228×200×1560 mm.
Pmax	: 140W
Vmp & Imp	: 18V 7.78A
Cell type	: MONO made in Taiwan
Solar cell efficiency	: 21.50%
Cable & Connector	: Universal MC4 with 0.6 meter 2.5mm
Structure material	: Aluminum alloy with powder coated >20 years lifetime
Operating temp.	: -20°C ~ +70°C
PV Lifetime	: >20 years
N.W / G.W	: 20.70kg / 22.80kg
Max pole diameter	: 155 mm.
Warranty	: 5 years

Fixture materials	: Aluminium+Glass
Powers max	: 140W
Type of solar panel	: rigid solar panel
Solar panel cell	: Monocrystalline
Conversion efficiency	: 21.2%
Qty of slim solar module	: 6 pcs/module
Connectors type	: MC4

Connection cable	: 0.5 meters 2.5mm ²
Connection cables	: 2 pairs of MC4
Linkable & Disassemble	: Yes
Max diameter of pole to suit	: 155 mm.
Wind resistance level	: Class 13 37.0~41.4m/s
IP	: 65

LC-Q140 SOLAR STREET LIGHT


IP65

ALUMINIUM
MATERIAL

140W
/MODULE

MONOCRYSTAL
SOLAR TYPE

DIMENSION (Unit mm.)

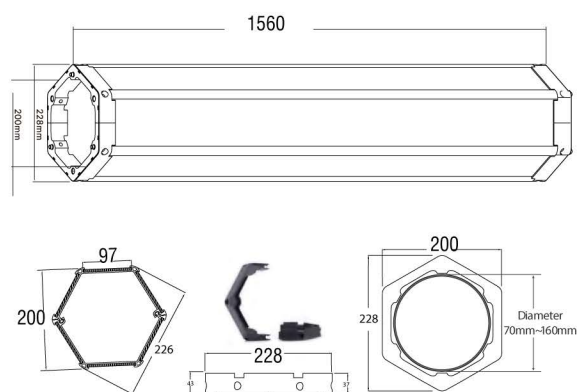


MORE INFORMATION

SOLAR PANEL

TYPE	MONOCRYSTALLINE SILICON SOLAR CELLS
MATERIAL	SILICON
POWER EFFICIENCY	17% - 20%
LIFETIME	25year+

UNIT PRICE : xxxx


LUC

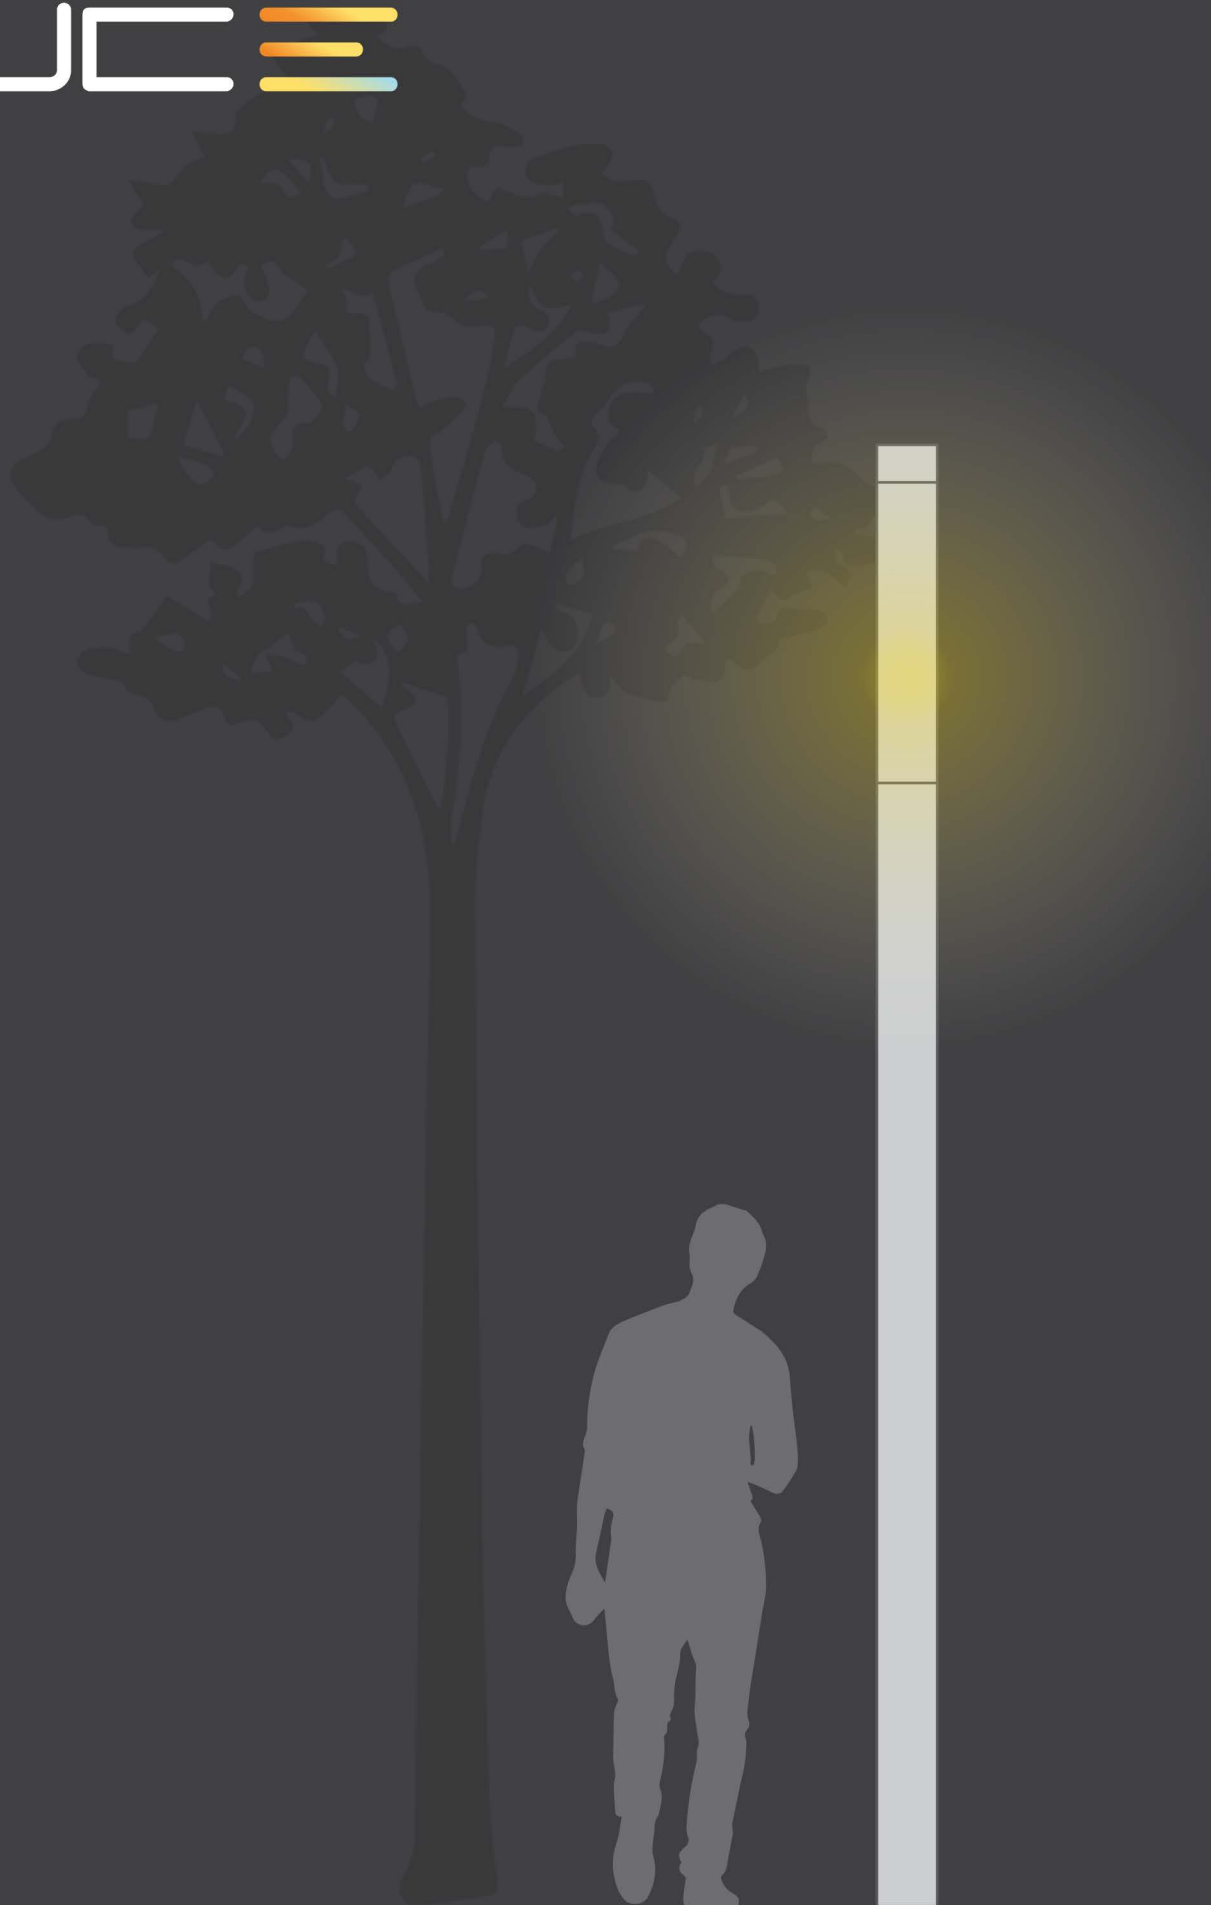

SMART LIGHT



DIMENSION (Unit mm.)

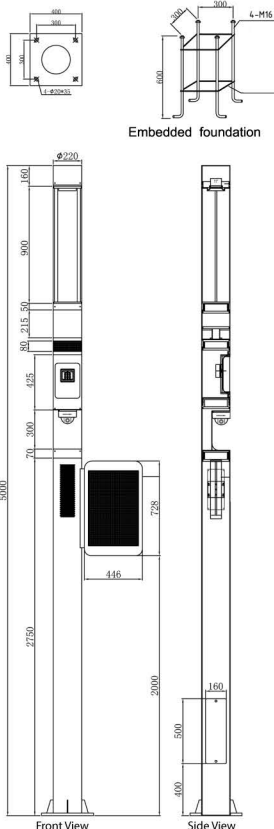

*Excluded of bolt for fixing with ground



SPECIFICATION

Model	: LC-WD-ZH-002 MAX AI
Light source	: - LED CREE 24W 360 degree lighting - Spot light 20W 180 degree lighting
Ai Funtion	: -Monitor camera -Speaker -Wifi -LED display -environment quality monitoring module
Power	: 24W
Lumen	: 2400 lm
Lumen/Watt	: 100 lm/W
CCT	: 4000K
CRI	: > 80
Beam Angle	: 360°
Material	: Aluminium
Color	: Matt Anthracite (V322401S)
Paint method	: Outdoor UV Spray Powder
Diffuser	: Polycarbonate
Adjustable	: No
IP	: 65
Driver Type	: Internal Driver
Surge Protection	: 6kV
Input Voltage	: AC220V-50Hz
Power factor	: > 0.96
Dimension (ØxH)	: Ø220×H5000mm.
Total Height	: 5000 mm.

UNIT PRICE : xx,xxx.-

Smart light
MAX



CREE
CHIP LED

24
WATT


IP65

ALUMINIUM
MATERIAL

MATT
ANTHRACITE
COLOR

MW
MEAN WELL
DRIVER

DIMENSION (Unit mm.)

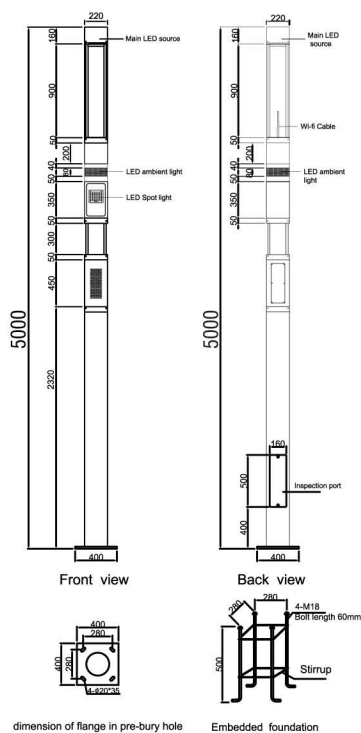

dimension of flange in pre-bury hole

Embedded foundation

*Excluded of bolt for fixing with ground

LC-WD-T373 MAX SMART LIGHT

SPECIFICATION

Model	: LC-WD-T373 MAX	Adjustable	: No
Light source	: LED CREE 24W/360° lighting/ 180° lighting reflector/Lighting ring	IP	: 65
AI Function	1. Camera module (without camera) 2. Speaker Module (without speaker) 3. Wi-Fi module (Wi-Fi speaker) 4. Advertising module (Advertising speaker)		
Power	: 24W	Driver Type	: Internal Driver
Lumen	: 2400 lm	Surge Protection	: 6kV
Lumen/Watt	: 100 lm/W	Input Voltage	: AC220V-50Hz
CCT	: 4000K	Power factor	: >0.96
CRI	: >80	Dimension (ØxH)	: Ø220×H5000mm.
Beam Angle	: 360°	Total Height	: 5000 mm.
Material	: Aluminium	Remark	: With AI equipment inside
Color	: Matt Anthracite (V322401S)		
Paint method	: Outdoor UV Spray Powder		
Optical cover	: Polycarbonate		

UNIT PRICE : xx,xxx.-

Smart light
NORMAL



CREE
CHIP LED

24
WATT


IP65

ALUMINIUM
MATERIAL

MATT
ANTHRACITE
COLOR

MW
MEAN WELL
DRIVER


DIMENSION (Unit mm.)

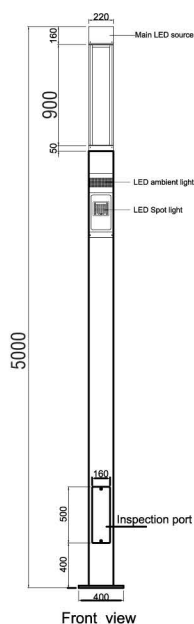

Front view



dimension of flange in pre-bury hole



Embedded foundation

*Excluded of bolt for fixing with ground

LC-WD-T373 NORMAL SMART LIGHT

SPECIFICATION

Model	: LC-WD-T373 NORMAL		
Light source	: LED CREE 24W/360° lighting/ 180° lighting reflector/Lighting ring		
Ai Funtion	: No		
Power	: 24W		
Lumen	: 2400 lm	Adjustable	: No
Lumen/Watt	: 100 lm/W	IP	: 65
CCT	: 4000K	Driver Type	: Internal Driver
CRI	: >80	Surge Protection	: 6kV
Beam Angle	: 360°	Input Voltage	: AC220V-50Hz
Material	: Aluminium	Power factor	: >0.96
Color	: Matt Anthracite (V322401S)	Dimension (ØxH)	: Ø220×H5000mm.
Paint method	: Outdoor UV Spray Powder	Total Height	: 5000 mm.
Optical cover	: Polycarbonate	Remark	: Only Lighting

UNIT PRICE : xx,xxx.-

LUC 



FACADE LIGHT

MEDIA TUBE® PLUS

FACADE LIGHT



IP66

**3.5/6.6/9.9
13.2 16.5
WATT**

**16.7 Million
COLOR RANGE**



SPECIFICATION

Model : MEDIA TUBE® PLUS RGB / DW / WHITE

	Direct View					Diffused View				
Length*	296mm/12"	596mm/23"	896mm/35"	1196mm/47"	1496mm/59"	296mm/12"	596mm/23"	896mm/35"	1196mm/47"	1496mm/59"
lm (RGBW)	232	435	655	877	1100	185	349	529	714	903
lm (RGB)	134	254	384	515	647	102	195	297	403	512
Pixels	9	18	27	36	45	9	18	27	36	45
Housing	Extruded Aluminum									
IP rating	Outdoor, IP66, Suitable for Coastal Environment									
Operating Temperature	40°C to +60°C / -40°F to +140°F									
Addressing	Auto-Addressing per daisy-chain or Manual-addressing with TX Addresser									
Control	e:pix / DMX 512									



FEATURES

- Available lengths*: 296mm / 1ft (9PXL), 596mm / 2ft (18PXL), 896mm / 3ft (27PXL), 1196mm / 4ft (36PXL) and 1496mm / 5ft (45PXL)
- Available in full resolution or customized Pixel Configurations
- Simple installation using the Mounting Brackets and Flat Cable Whips
- Daisy Chain System with quick lock connectors
- IP66 and Suitable for Coastal Environments
- IK09 Impact Rated and ANSI 3G Vibration Rated for installation in harsh environments


APPLICATIONS

- Accent/border dynamic effect
- Medium-resolution media facades
- Stadiums, Bridges, Hospitality, Office Buildings

PHOTOMETRIC DATA

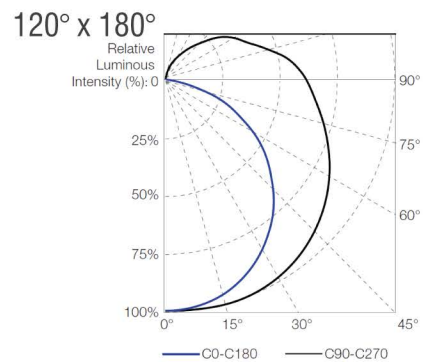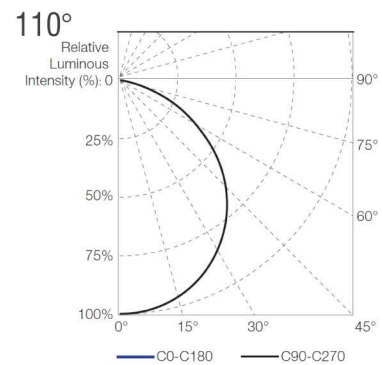

DIMENSION (Unit mm.)

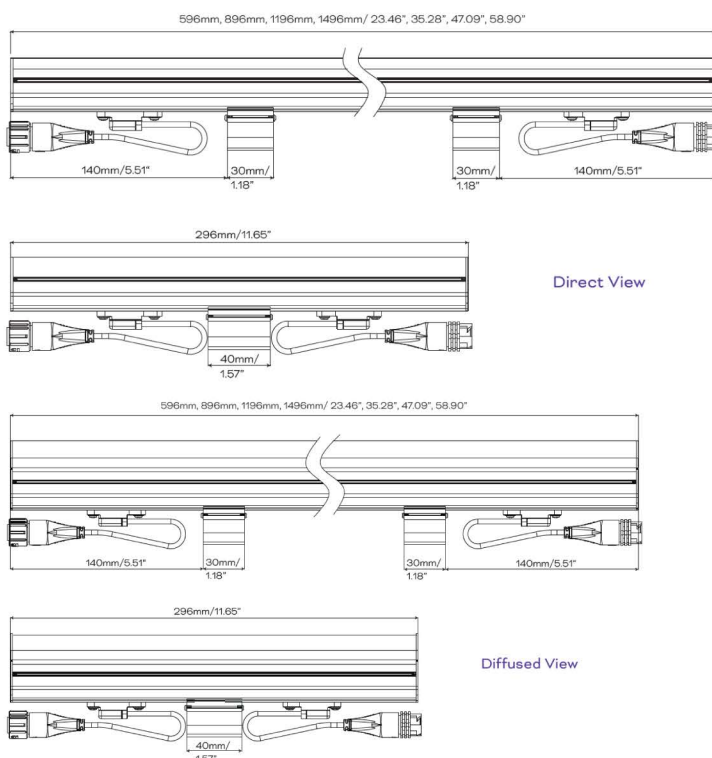

UNIT PRICE : xx,xxx.-

LINEAR GO MIDI

FACADE LIGHT



IP66

8/32
WATT

RGBW
COLOR RANGE



SPECIFICATION

Model : LINEAR GO MIDI RGBW / DW / WHITE

Dimension (L)	320mm	1200mm	
Light sour	RGBW 4-in1 / RGB	RGBW 4-in1 / RGB	
Lumen	400 lm (35°)	1600 lm (35°)	
Lumen/Watt	50 lm/W (full on 35°)	50 lm/W (full on 35°)	
LED Quantity	8pcs	32pcs	
Beam Angle	25°, 35°, 45° x 20°	25°, 35°, 45° x 20°	
Dimension (WxH)(Without Glare Shield)	38mm x 76mm	38mm x 76mm	
Dimension (WxH)(With Glare Shield)	38mm x 94.6mm	38mm x 94.6mm	
Weight(Without Glare Shield)	0.54kg	1.66kg	
Weight(With Glare Shield)	0.59kg	1.83kg	
Mounting	Mounting Bracket	Power	8W / 32W
Optical cover	Glass	Input Voltage	24V DC
Color Range	RGBW / RGB	Regulatory Listing & Safety Approval	cETLus, FCC, ANSI C136.31-3G
Housing	Aluminum		
Housing Finish Options	Traxon Signature Gray	Operating Temperature	-30°C to +50°C (-22°F to +122°F)
Adjustment Options	-90° to +90°	Storage Temperature	-40°C to +80°C (-40°F to +176°F)
IP	66	Humidity	85%, non-condensing

FEATURES


- DMX control
- Easy installation and maintenance

TECHNOLOGIES


- Manual-Addressing with TX Addresser

DIMENSION (Unit mm.)


Without Glare Shield

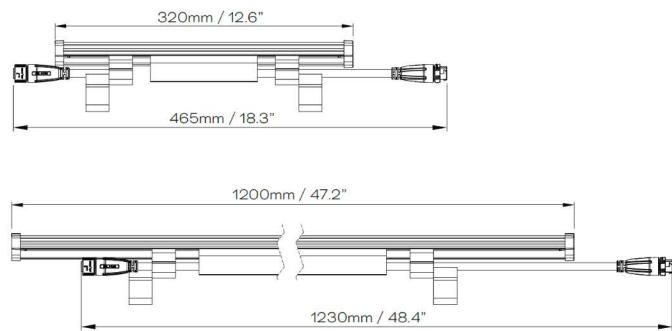

With Glare Shield

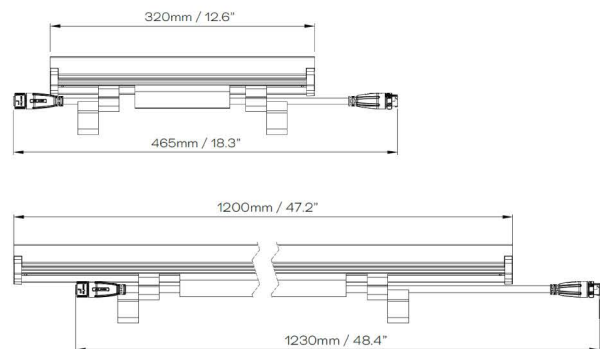

PHOTOMETRIC DATA

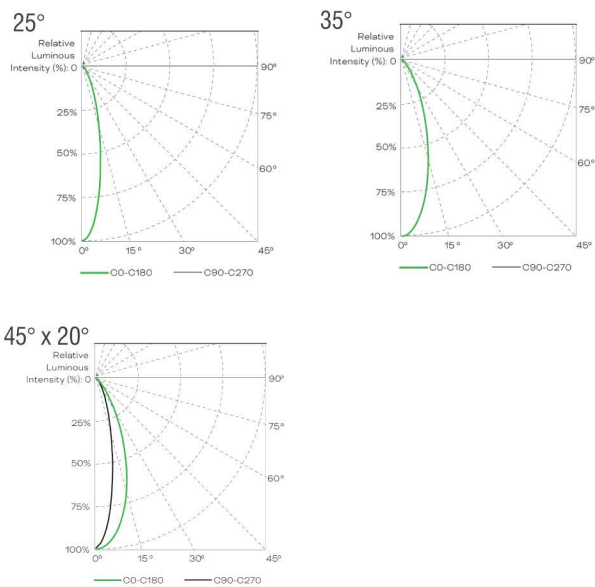

UNIT PRICE : xx,xxx.-

LINEAR GO MINI

FACADE LIGHT



IP66

4.5/18
WATT

2700/3000/4000/
5700/6500K
COLOR RANGE



SPECIFICATION

MODEL : LINEAR GO MINI RGBW / DW / WHITE

DIMENSION (L)	320MM	1200MM
Light Sour	White LED / RGB	White LED / RGB
LUMEN (4.5W per 300mm / 1ft) (3.4W per 300mm / 1ft)	White 4000K: 383 lm (30°) White 4000K: 289 lm (30°)	White 4000K: 1530 lm (30°) White 4000K: 1156 lm (30°)
Lumen/Watt	White 4000K: 85 lm/W (full on 30°)	
Led Quantity	9pcs	36pcs
Beam Angle	20°, 30°, 40°, 55° x 20°	20°, 30°, 40°, 55° x 20°
Dimension (Wxh)	30mm x 77.1mm	30mm x 77.1mm
Weight	0.69kg	1.65kg
Color Range	White 2700K, 3000K, 4000K, 5700K, 6500K / RGB	
Mounting	Mounting Bracket	Power 4.5W / 18W
Optical Cover	Glass	Input Voltage 24V DC
Pixel Configuration	1 Pixel per fixture	Regulatory Listing & Safety Approval cETLus, FCC, ANSI C136.31-3G
Housing	Aluminum	
Housing Finish Options	Traxon Signature Gray	Operating Temperature -30°C to +50°C (-22°F to +122°F)
Adjustment Options	-30° to +90°	Storage Temperature -40°C TO +80°C (-40°F TO +176°F)
IP	66	Humidity 85%, Non-Condensing


FEATURES

- DMX control
- Easy installation and maintenance


TECHNOLOGIES

- Manual-Addressing with TX Addresser

DIMENSION (Unit mm.)

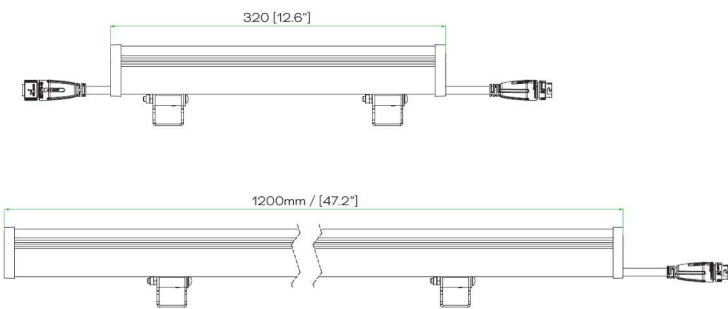

PHOTOMETRIC DATA

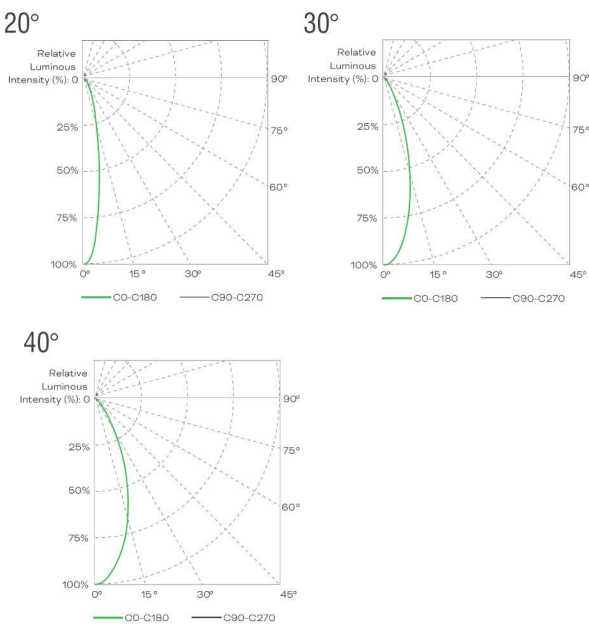

UNIT PRICE : xx,xxx.-

ARCHISHAPE MEDIA TUBE

FACADE LIGHT



IP66

**4.2/7/14
WATT**

**16.7 Million
COLOR RANGE**



SPECIFICATION


Model : ARCHISHAPE MEDIA TUBE RGBW / DW / WHITE

	Direct View			Diffused View		
Dimension (L)	300mm	500mm	1000mm	300mm	500mm	1000mm
Light sour	18 RGB	30 RGB	60 RGB / RGBW	18 RGB	30 RGB	60 RGB / RGBW
Lumen	105 lm	175 lm	350 lm	84 lm	140 lm	280 lm
Lumen/Watt	25 lm/W			19 lm/W		
Pixel Pitch	100mm			100mm		
Pixel Configuration	6 RGB LEDs per pixel			6 RGB LEDs per pixel		
Number of Pixel	3 pixels	5 pixels	10 pixels	3 pixels	5 pixels	10 pixels
Beam Angle	95°			110° x 170°		
Dimension (WxH)	23.5x27.2mm (without bracket)			23.5x27.2mm (without bracket)		
Weight	0.35kg	0.52kg	0.85kg	0.35kg	0.52kg	0.85kg
Optical cover	Clear Glass			PC		
Color Range	16.7 Million additive RGB colors / RGBW					
Housing	Extruded Aluminum		Regulatory Listing & Safety Approval	CE		
Adjustment Options	Adjustable					
IP	66		Operating Temperature	−30°C to +50°C / −22°F to +122°F		
Power	4.2W / 7W / 14W		Storage Temperature	−40°C to +70°C / −40°F to +158°F		
Input Voltage	24V DC		Humidity	10-90%, non-condensing		

FEATURES

- DMX control
- Easy installation and maintenance


DIMENSION (Unit mm.)

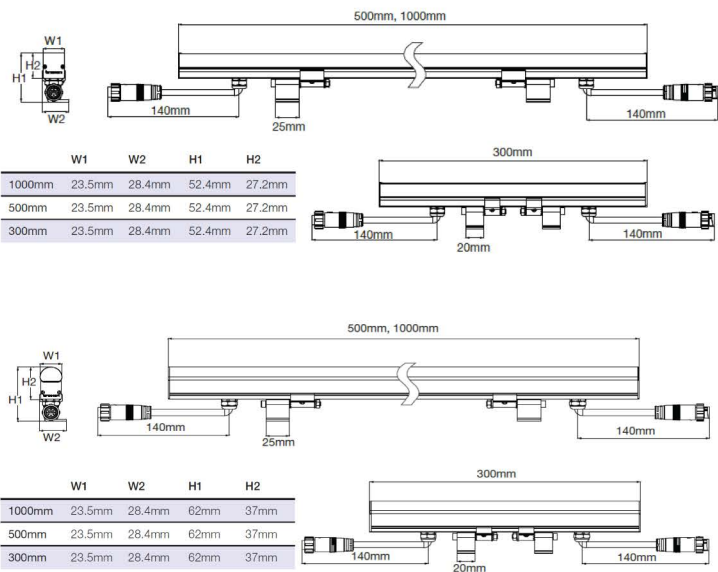

TECHNOLOGIES

- Manual-Addressing with TX Addresser

PHOTOMETRIC DATA

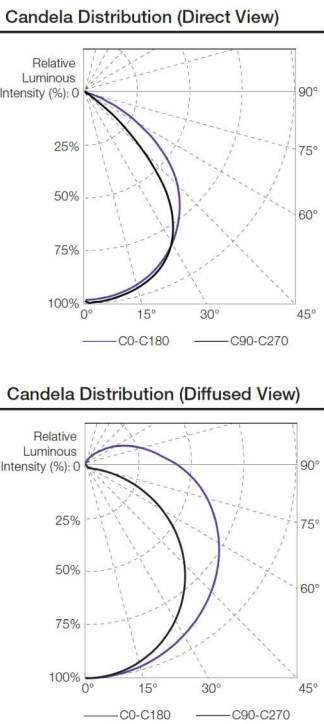

UNIT PRICE : xx,xxx.-

CONTROLLER

MODEL : Butler S2



TECHNICAL DATA

Dimensions(WxHxD)	: 71.5 x 24 x 85 mm
Weight	: 125 g
Power	: 12 ... 24 V DC via ext. PSU 48 V DC via PoE
Rated current max.	: 250 mA
Power consumption	: 2.7 W (incl. DMX termination)
Operating/storage temp.	: 0 ... 40 °C/32 ... 104 °F
Operating/storage humidity	: 0 ... 80% non-condensing
Protection class	: IP20
Electrical safety	: SELV
Materials	: Aluminium, plexi glass, steel
Mounting	: Desktop or in Butler Garage
Certification	: CE EN 55022, EN 55024, EN 60950
Operator display	: 7-segment LED 2 x e:net status LEDs
Control keys	: 1 x push button
e:net/Ethernet	: 1 x RJ45, 10/100 MBit, PoE enabled
Supply power	: 2 x Screw terminals, cable width 0.25 ... 1 mm ²
DMX	: 2 x RJ45, USITT DMX512-A/RDM E1.20 Pin 1: DMX- Pin 2: DMX+ Pin 3: DMX Ground Galvanic isolation: 1000 V

MAIN FEATURES

- Two DMX universes (up to 1024 DMX channels)
- Scalable up to 16,384 channels (16 Butler S2, 32 universes)
- Can play up to 99 cuelists in standalone mode
- Plays up to eight cuelists in parallel
- Reliable uninterrupted operation
- microSDHC drive for flexible storage
- Control of up to 128 DMX universes clustered when using a central controller
- RJ45 connectivity for show upload, DMX output and e:net
- Standalone configuration via web browser/Ethernet interface
- External power supply 12 ... 24 V DC or PoE
- 7-segment LED-Display for status and cuelist information

MODEL : SYMPL Core S



TECHNICAL DATA

Dimensions(WxHxD)	: 71.5 x 90.5 x 62 mm
Weight	: 170 g
Power supply	: 24 V DC on terminal plug wire gauge: 0.205 ... 3.31 sqmm
Power consumption	: max. 12 W incl. external USB load
Operating temperature	: 0 ... 40 °C/32 ... 104 °F
Storage temperature	: -10 ... 70 °C/14 ... 158 °F
Operating/storage hum.	: 0 ... 80%, non-condensing
Protection class	: IP20
Electrical safety	: SELV
Housing	: Self extinguishing blend PC/ABS, UL document E140692
Mounting	: on 35 mm DIN rails acc. DIN 43880 (EN 60715), width: 4 units
Cooling	: fanless, convection cooling
User interface	: 4 LEDs (Master/Slave, Error/Status, Ethernet, Power) 1 button
System interfaces	: 1 x e:net/Ethernet, RJ45 CAT5 shielded USB 2.0 Type A
Mass memory	: microSD card

MAIN FEATURES

- SYMPHOLIGHT engine for small to medium-sized projects
- Connections to SYMPL Nodes over Ethernet
- SYMPHOLIGHT Action Pad as user interface with all usual web browsers
- microSD-Karte as mass memory
- USB 2.0 interface für USB memory sticks

MODEL : SYMPL dmx Node



TECHNICAL DATA

Dimensions(WxHxD)	: 53.5 x 90.5 x 62 mm
Weight	: 100 g
Power supply	: 24 V DC (terminal plug) wire gauge: 0.21 ... 3.31 sqmm; or PoE IEEE 802.3af on RJ45
Power consumption	: 2 W (incl. DMX termination)
Operating temperature	: 0 ... 50 °C/32 ... 122 °F
Storage temperature	: -10 ... 70 °C/14 ... 158 °F
Electrical safety	: 0 ... 80%, non-condensing
Operating/storage hum.	: SELV
Protection Class	: IP20
Housing material	: Self extinguishing blend PC/ABS UL document E140692
Mounting	: on 35 mm DIN rail (DIN 43880), 3 units or with key hole on any stable vertical surface
Certification	: CE, ETL, UKCA
Interfaces	: 2 x DMX512/RDM, individually isolated (1 kV) 3-pin terminal plug wire gauge: 0.08 ... 1.31 sqmm
Interface specifications	: VDMXmax/VDMXmin = 4.8 V/0.8 V Short circuit protected: ISCmax = 62 mA
Ethernet-Port	: 1 x e:net 10/100 Mbit/s RJ-45
User interface	: LEDs for error, Ethernet activity, device status, DMX/RDM status Identify button

MAIN FEATURES

- Two independent interfaces for DMX512
- Two independent RDM universes
- Flexible mounting on 35 mm DIN rails or vertical surfaces
- Simple and easy integration in e:cue SYMPHOLIGHT

MODEL : SYMPL input Node




TECHNICAL DATA

Dimensions(WxHxD)	: 53.5 x 90.5 x 62 mm
Weight	: 100 g
Power supply	: 24 V DC (terminal plug) wire gauge: 0.205 ... 3.31 sqmm or PoE IEEE 802.3af on RJ-45
Power consumption	: 1.2 W
Operating temperature	: 0 ... 50 °C/32 ... 122 °F
Storage temperature	: -10 ... 70 °C/14 ... 158 °F
Operating/storage hum.	: 0 ... 80%, non-condensing
Protection class	: IP20
Electrical safety	: SELV
Housing	: Self extinguishing blend PC/ABS UL document E140692
Mounting	: on 35 mm DIN rail (DIN 43880), 3 units or with key hole on any stable vertical surface
Certification	: CE, ETL, UKCA
Interfaces	: 8 x analog inputs 0 ... 10 V, 4 of them switchable to 0 ... 20 mA common ground connector terminal plug row wire gauge: 0.08 ... 1.31 sqmm
Interface specifications	: max. input voltage 12 V DC max. input current 30 mA input impedance 10 V 40 kΩ input impedance 20 mA 150 Ω
Ethernet-Port	: 1 x e:net 10/100 Mbit/s RJ-45
User interface	: LEDs for error, Ethernet activity, device status, input indicators, Identify button


MAIN FEATURES

- SYMPHOLIGHT engine for small to medium-sized projects
- Connections to SYMPL Nodes over Ethernet
- SYMPHOLIGHT Action Pad as user interface with all usual web browsers
- microSD-Karte as mass memory
- USB 2.0 interface für USB memory sticks

SYMPL Modular Controller Range

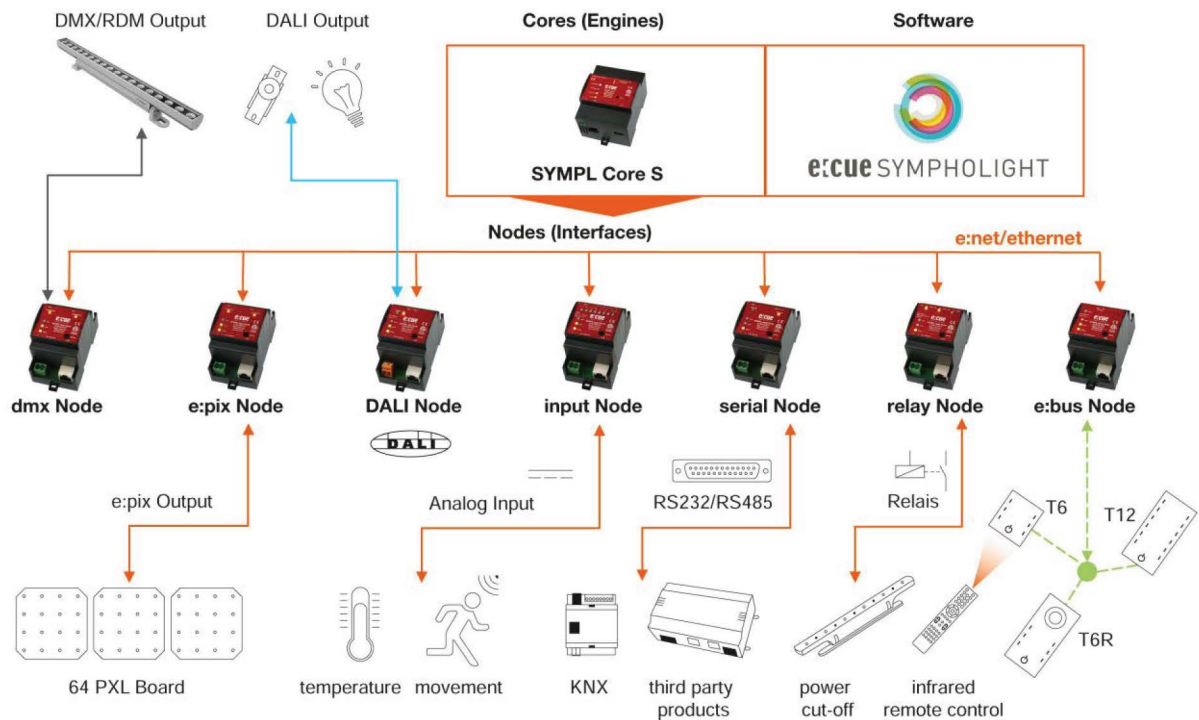

A) e:net (ethernet based protocol)

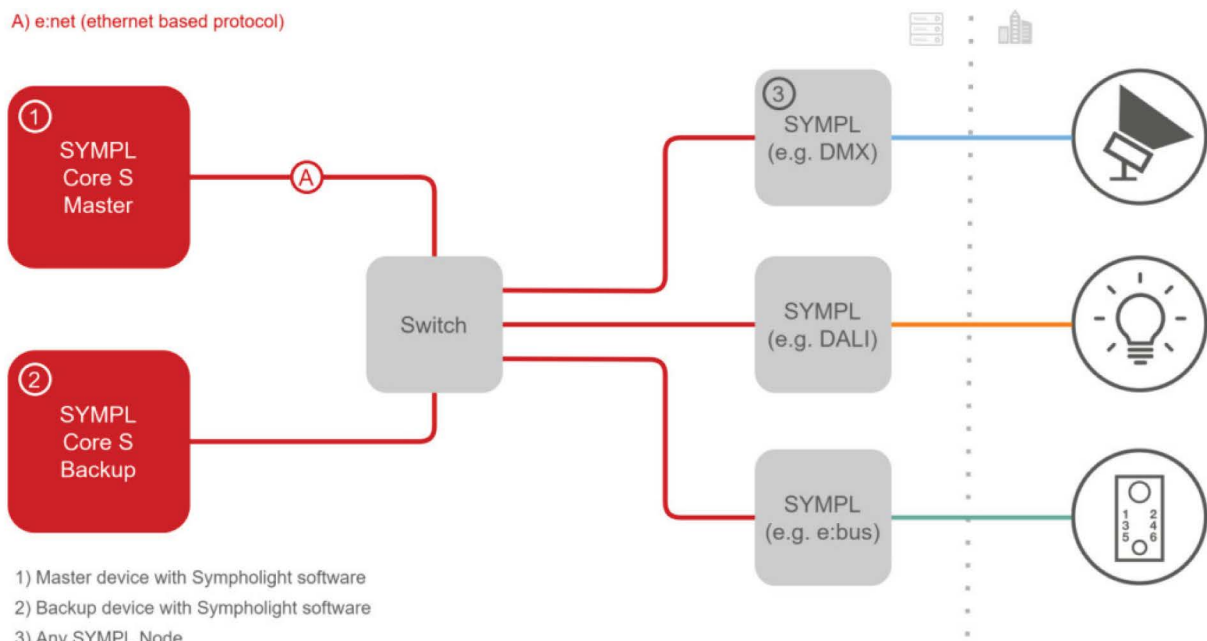

e:cue SYMPHOLIGHT

Dynamic Architectural Lighting Control on a new level

Create and interact with monochrome or dynamic coloured light scenes as never before. It is that simple and flexible like an entry-level video editing software but with powerful tools for any demanding application.

www.southeastthailand.co.th