


LC-WD-T135 SOLAR

SOLAR STREET LIGHT




solar panel

LED
15 Watt

SOLAR PANEL 2X15W



SOLAR
LUMINAIRE
100%



EPISTAR
LED

15W
LED POWER

IP65

SOLAR PANEL
2×15W

ALUMINIUM
MATERIAL

MATT
ANTHRACITE
COLOR

POLYCRYSTAL
SOLAR TYPE


SOLAR LAMP

WORK TIME
8Hrs

SPECIFICATION

Color	: Matt Anthracite (V322014S)
Size	: W155 x L800 x H3500 mm.
Light Source	: LED Module Epistar
LED Power	: 15W
Solar Panel	: 6V 15W×2
Battery	: 3.2V 40AH Lithium battery (including booster controller)
Charge Time	: 5 hours/day.It takes 10 hours to charge when there is no power at all.
Lighting Pe	: 100% 2 hrs, 70% 2 hrs, 50% 4 hrs, 3-5 rainy days
Beam Angle	: 120°
Input Voltage	: 9~24V
CCT	: 4000K
Material	: Good quality aluminum. The diffuse glass is tempered clear glass. The exposed fastening screws, nuts is 304 stainless steel.
Craftwork	: Outdoor UV Spray Powder Anti-rotten/acid.alkali.thickness,80um. fastening screws, nuts of stainless steel (exposed).
IP	: 65
Dimension	: 800 × 155 × 3500 mm.
Total Height	: 3500 mm.

DIMENSION (Unit of mm.)

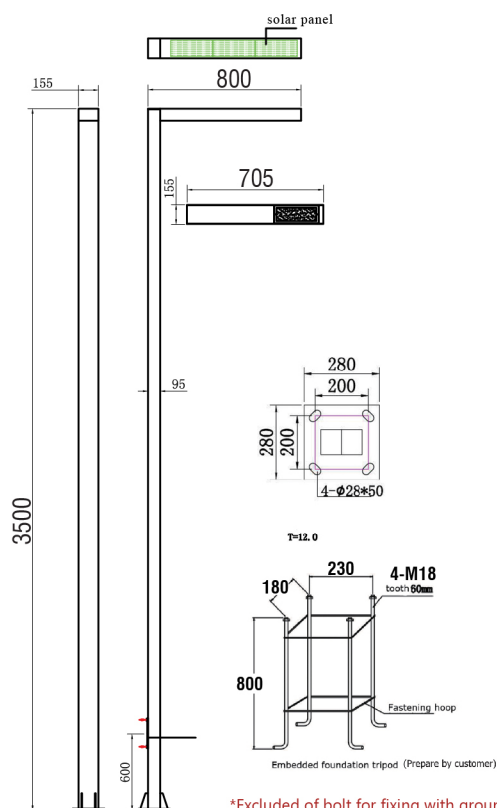

*Excluded of bolt for fixing with ground

SOLAR PANEL

TYPE	POLYCRYSTALLINE SILICON SOLAR CELLS
MATERIAL	(polycrystalline, p-Si)
POWER EFFICIENCY	15%-19%
LIFETIME	20 year